# DATASHEET

# 1.9mm Round Subminiature Axial Infrared LED SIR91-21C/TR7

EVERLIGHT



#### **Features**

- Good spectral matching to Si photodetector
- Low forward voltage
- Peak wavelength λp=875nm
- Pb free
- The product itself will remain within RoHS compliant version
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

#### Descriptions

• SIR91-21C/TR7 is an infrared emitting diode in miniature SMD package which is molded in a water clear plastic with spherical top view lens. The device is spectrally matched with silicon photodiode and phototransistor

#### **Applications**


- PCB mounted infrared sensor
- Infrared remote control units with high power requirement
- Scanner
- Infrared applied system

#### **Device Selection Guide**

Part Category	Chip Material	Resin Color	
SIR	GaAlAs	Water clear	

**EVERLIGHT** 

## **Package Dimensions**

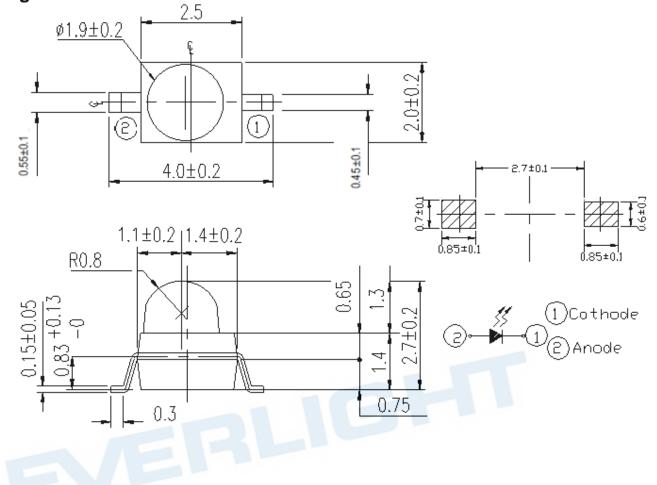

**Notes:** 1.All dimensions are in millimeters 2.Tolerances unless dimensions ±0.1mm

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units	
Continuous Forward Current	lF	65	mA	
Reverse Voltage	VR	5	V	
Operating Temperature	Topr	-40~ +85	°C	
Storage Temperature	T <sub>stg</sub>	-40~ +85	°C	
Soldering Temperature *1	T <sub>sol</sub>	260	°C	
Power Dissipation at(or below) 25℃ Free Air Temperature	Pd	110	mW	

**Notes:** \* Soldering time  $\leq$  5 seconds.

## Electro-Optical Characteristics (Ta=25°C)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
		I <sub>F</sub> =20mA	3.0	5.0		
Radiant Intensity	Ie	$I_{F}\!\!=\!\!100mA$ Pulse Width $\leq\!100\mu\text{s}$ ,Duty $\leq\!1\%$	-	20		mW /sr
Peak Wavelength	λp	I <sub>F</sub> =20mA		875		nm
Spectral Bandwidth	Δλ	I <sub>F</sub> =20mA		80		nm
		I <sub>F</sub> =20mA		1.3	1.6	
Forward Voltage	$V_{\mathrm{F}}$	$I_{F}\!\!=\!\!100mA$ Pulse Width $\!\leq\!100\mu\text{s}$ ,Duty $\!\leq\!1\%$		1.4	1.8	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V			10	$\mu A$
View Angle	2 <del>0</del> 1/2	I <sub>F</sub> =20mA		20		deg

# **Typical Electro-Optical Characteristics Curves**

Fig.1 Forward Current vs.

Fig.2 Spectral Distribution

Ambient Temperature

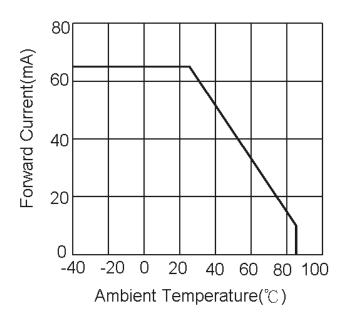




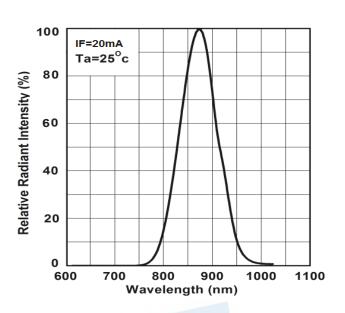


Fig.3 Forward Current vs.



Forward Voltage

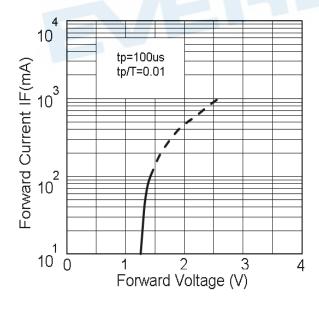

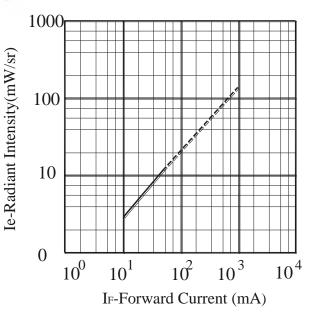


EVERLIGHT

## **Typical Electro-Optical Characteristics Curves**

Fig.6 Relative Radiant Intensity vs.

Angular Displacement

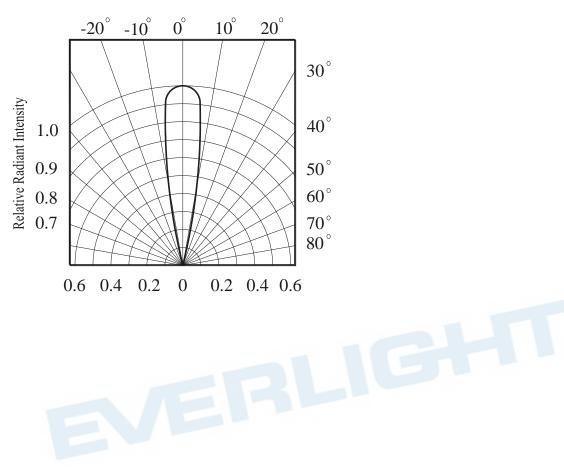

#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at 10°C~30°C and 90%RH or less.
  - 2.3 The LEDs suggested be used within one year.
  - 2.4 After opening the package, the devices must be stored at 10°C~30°C and ≤ 60%RH, and used within 168 hours (floor life). If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.5 If the moisture absorbent material (desiccant material) has faded or unopened bag has exceeded the shelf life or devices (out of bag) have exceeded the floor life, baking treatment is required.
  - 2.6 If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure or recommend the following conditions:

96 hours at 60°C ± 5°C and < 5 % RH (reeled/tubed/loose units)

- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile

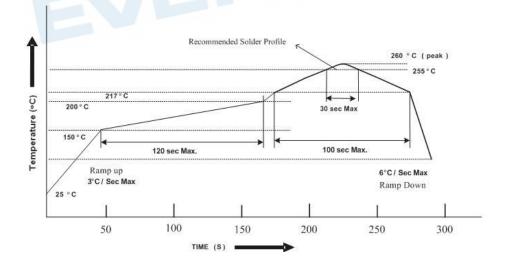

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.


#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

Data Sheet 1.9mm Round Subminiature Axial Infrared LED SIR91-21C/TR7

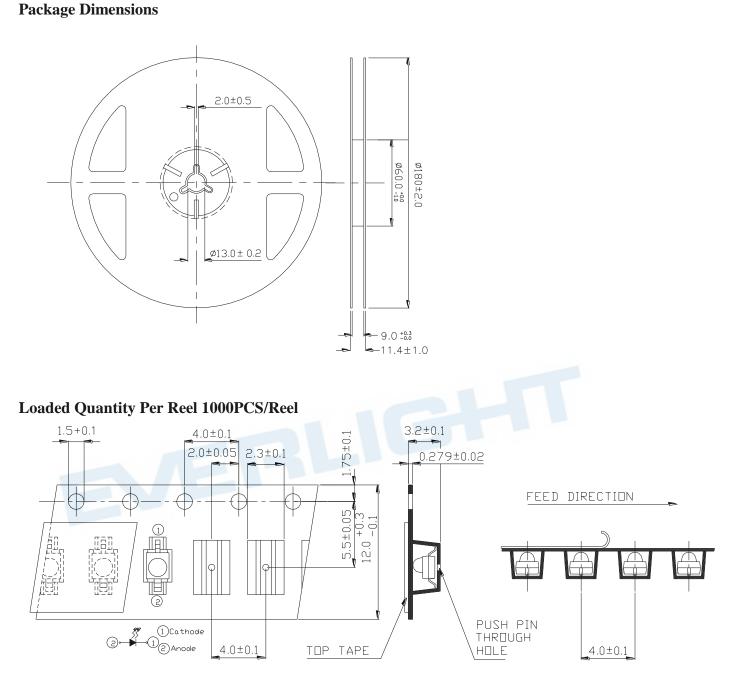

**EVERLIGHT** 

Unit :mm

8

# **EVERLIGHT**

# Packing Quantity Specification

1000Pcs/1Bag

# Label Form Specification

CPN : XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
200000000X-20000000X-20000X2XXXX-200000XXX-20000X P/N:XXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
QTY:0123456789 HUE: XXXXXXXXX CAT:XXXXXXXX REF: XXXXXXXXX PLANKER
CAT:XXXXXXXXX REF: XXXXXXXXX REFERENCE: BTPYYMMDDXXXXX
MSL-X MADE IN XXXXXX

CPN: Customer's Production Number P/N : Production Number QTY: Packing Quantity CAT: Ranks HUE: Peak Wavelength REF: Reference LOT No: Lot Number

# DISCLAIMER

- 1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
- The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
- 3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
- 4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
- 6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.