



**RAYSTAR**

# 曜凌光電股份有限公司

住址: 42878 台中市大雅区科雅路 25 號 5F WEB: <http://www.Raystar-Optronics.com>  
5F., No.25, Keya Rd., Daya Dist., Taichung E-mail: [sales@raystar-optronics.com](mailto:sales@raystar-optronics.com)  
City 428, Taiwan Tel:886-4-2565-0761 Fax : 886-4-2565-0760

## RFF50XB-1IW-DHS

---

---

### SPECIFICATION

CUSTOMER:

|             |  |
|-------------|--|
| APPROVED BY |  |
| PCB VERSION |  |
| DATE        |  |

FOR CUSTOMER USE ONLY

| SALES BY | APPROVED BY | CHECKED BY | PREPARED BY |
|----------|-------------|------------|-------------|
|          |             |            |             |

Release DATE:

## Revision History

| VERSION | DATE       | REVISED PAGE NO. | Note        |
|---------|------------|------------------|-------------|
| 0       | 2016/11/29 |                  | First issue |

RAYSTAR OPTRONICS

# Contents

1. Module Classification Information
2. Summary
3. General Specification
4. Interface
5. Contour Drawing
6. Absolute Maximum Ratings
7. Electrical Characteristics
8. DC Characteristics
9. Optical Characteristics
10. Reliability
11. Touch Panel Information
12. Other

# 1. Module Classification Information

| R | F | F | 50 | XB | - | 1 | I | W | - | D | H  | S  |
|---|---|---|----|----|---|---|---|---|---|---|----|----|
| 1 | 2 | 3 | 4  | 5  | - | 6 | 7 | 8 | - | 9 | 10 | 11 |

| Item | Description   |  |
|------|---|--|
| 1    | R : Raystar Optronics Inc.  |  |
| 2    | Display Type : F→TFT Type, J→ Custom TFT  |  |
| 3    | Solution: A: 128x160    B:320x234    C:320x240    D:480x234    E:480x272<br>F:800x480    G:640x480    H:1024x600    I:320x480    J:240x320<br>K:1280x800    L:240x400    M:1024x768    N:128x128    O:480x800<br>P:640x320    Q:800x600    S:480x128    T:800x320 |  |
| 4    | Display Size : 5.0" TFT   |  |
| 5    | Version Code.   |  |
| 6    | Model Type:<br>A : TFT LCD<br>E : TFT+FR+CONTROL BOARD<br>J : TFT+FR+A/D BOARD<br>N : TFT+FR+A/D BOARD+CONTROL BOARD<br>S : TFT+FR+POWER BOARD (DC TO DC)<br>1 : TFT+CONTROL BOARD  | 6 : TFT+FR<br>H : TFT+D/V BOARD<br>I : TFT+FR+D/V BOARD<br>B : TFT+POWER BD  |
| 7    | Polarizer Type,<br>Temperature range,<br>View direction   | I→Transmissive, W. T, 6:00 ;    C→Transmissive, N. T, 6:00<br>L→Transmissive, W.T,12:00 ;    F→Transmissive, N.T,12:00<br>Y→Transmissive,W.T, IPS TFT ;<br>A→Transmissive, N.T, IPS TFT<br>Z→Transmissive, W.T, O-TFT<br>R→Transmissive, Super W.T, O-TFT<br>N→Transmissive, Super W.T, 6:00;<br>Q→Transmissive, Super W.T, 12:00<br>V→Transmissive, Super W.T, VA TFT |
| 8    | Backlight   | W : LED, White                          H : LED, High Light White<br>F : CCFL, White   |
| 9    | Driver Method   | D: Digital    A: Analog    L : LVDS    M:MIPI  |
| 10   | Interface   | N : without control board    A : 8Bit    B : 16Bit<br>S:SPI Interface    R: RS232    U:USB    I: I2C    H: HDMI  |
| 11   | TS  | N : Without TS    S : resistive touch panel<br>C : capacitive touch panel capacitive touch panel (G-F-F)<br>G : capacitive touch panel(G-G)  |

## 2.Summary

TFT 5.0” is a TN transmissive type color active matrix TFT liquid crystal display that use amorphous silicon TFT as switching devices. This module is a composed of a TFT\_LCD module, It is usually designed for industrial application and this module follows RoHs,

RAYSTAR OPTRONICS

---

### 3.General Specifications

- Size: 5.0 inch
- Dot Matrix: 800 x 3(RGB) x 480 dots
- Module dimension: 120.7 x 75.8 x 23.0 (Max) mm
- Active area: 108.0 x 64.8 mm
- Dot pitch: 0.045 x 0.135 mm
- LCD type: TFT, Normally White, Transmissive
- View Direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- Aspect Ratio: 16:9
- Backlight Type: LED, Normally White
- Controller IC: TFP401
- Interface: HDMI
- With /Without TP: With RTP(USB)
- Surface: Anti-Glare


\*Color tone slight changed by temperature and driving voltage.

## 4.Interface


### 4.1. LCM PIN Definition(CON5)

| Pin | Symbol | Function   | Remark |
|-----|--------|--|--------|
| 1   | 3.3V   | Raspberry Pi:Power 3.3V                                |        |
| 2   | 5V     | Raspberry Pi:Power 5V                                  |        |
| 3   | GPIO02 | Raspberry Pi:GPIO02 / CTP_SDA (For CTP type Reserved)  |        |
| 4   | 5V     | Raspberry Pi:Power 5V                                  |        |
| 5   | GPIO03 | Raspberry Pi:GPIO03 / CTP_SCL (For CTP type Reserved)  |        |
| 6   | GND    | Raspberry Pi:GND                                       |        |
| 7   | GPIO04 | Raspberry Pi:GPIO04                                    |        |
| 8   | GPIO14 | Raspberry Pi:GPIO14                                    |        |
| 9   | GND    | Raspberry Pi:GND                                       |        |
| 10  | GPIO15 | Raspberry Pi:GPIO15                                    |        |
| 11  | GPIO17 | Raspberry Pi:GPIO17 / CTP_RST (For CTP type Reserved)  |        |
| 12  | GPIO18 | Raspberry Pi:GPIO18                                    |        |
| 13  | GPIO27 | Raspberry Pi:GPIO27 / CTP_WAKE (For CTP type Reserved) |        |
| 14  | GND    | Raspberry Pi:GND                                       |        |
| 15  | GPIO22 | Raspberry Pi:GPIO22 / CTP_INT (For CTP type Reserved)  |        |
| 16  | GPIO23 | Raspberry Pi:GPIO23                                    |        |
| 17  | 3.3V   | Raspberry Pi:3.3V                                      |        |
| 18  | GPIO24 | Raspberry Pi:GPIO24                                    |        |
| 19  | GPIO10 | Raspberry Pi:GPIO10                                    |        |
| 20  | GND    | Raspberry Pi:GND                                       |        |
| 21  | GPIO09 | Raspberry Pi:GPIO09                                    |        |
| 22  | GPIO25 | Raspberry Pi:GPIO25                                    |        |
| 23  | GPIO11 | Raspberry Pi:GPIO11                                    |        |
| 24  | GPIO08 | Raspberry Pi:GPIO08                                    |        |
| 25  | GND    | Raspberry Pi:GND                                       |        |
| 26  | GPIO07 | Raspberry Pi:GPIO07                                    |        |
| 27  | ID_SD  | Raspberry Pi:ID_SD                                     |        |
| 28  | ID_SC  | Raspberry Pi:ID_SC                                     |        |
| 29  | GPIO05 | Raspberry Pi:GPIO05                                    |        |
| 30  | GND    | Raspberry Pi:GND                                       |        |
| 31  | GPIO06 | Raspberry Pi:GPIO06                                    |        |
| 32  | GPIO12 | Raspberry Pi:GPIO12                                    |        |
| 33  | GPIO13 | Raspberry Pi:GPIO13                                    |        |
| 34  | GND    | Raspberry Pi:GND                                       |        |
| 35  | GPIO19 | Raspberry Pi:GPIO19                                    |        |
| 36  | GPIO16 | Raspberry Pi:GPIO16                                    |        |
| 37  | GPIO26 | Raspberry Pi:GPIO26                                    |        |
| 38  | GPIO20 | Raspberry Pi:GPIO20                                    |        |
| 39  | GND    | Raspberry Pi:GND                                       |        |
| 40  | GPIO21 | Raspberry Pi:GPIO21                                    |        |

## 5. Contour Drawing

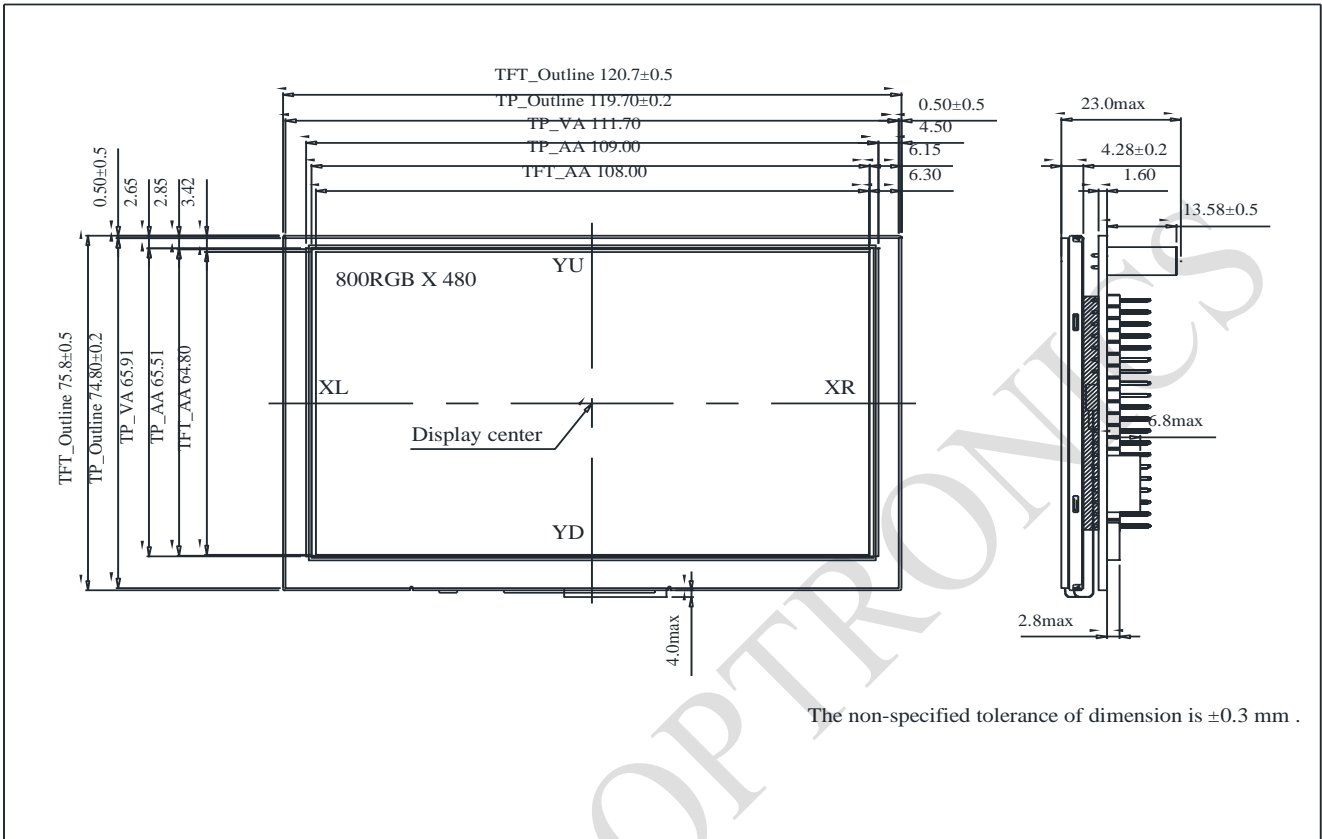



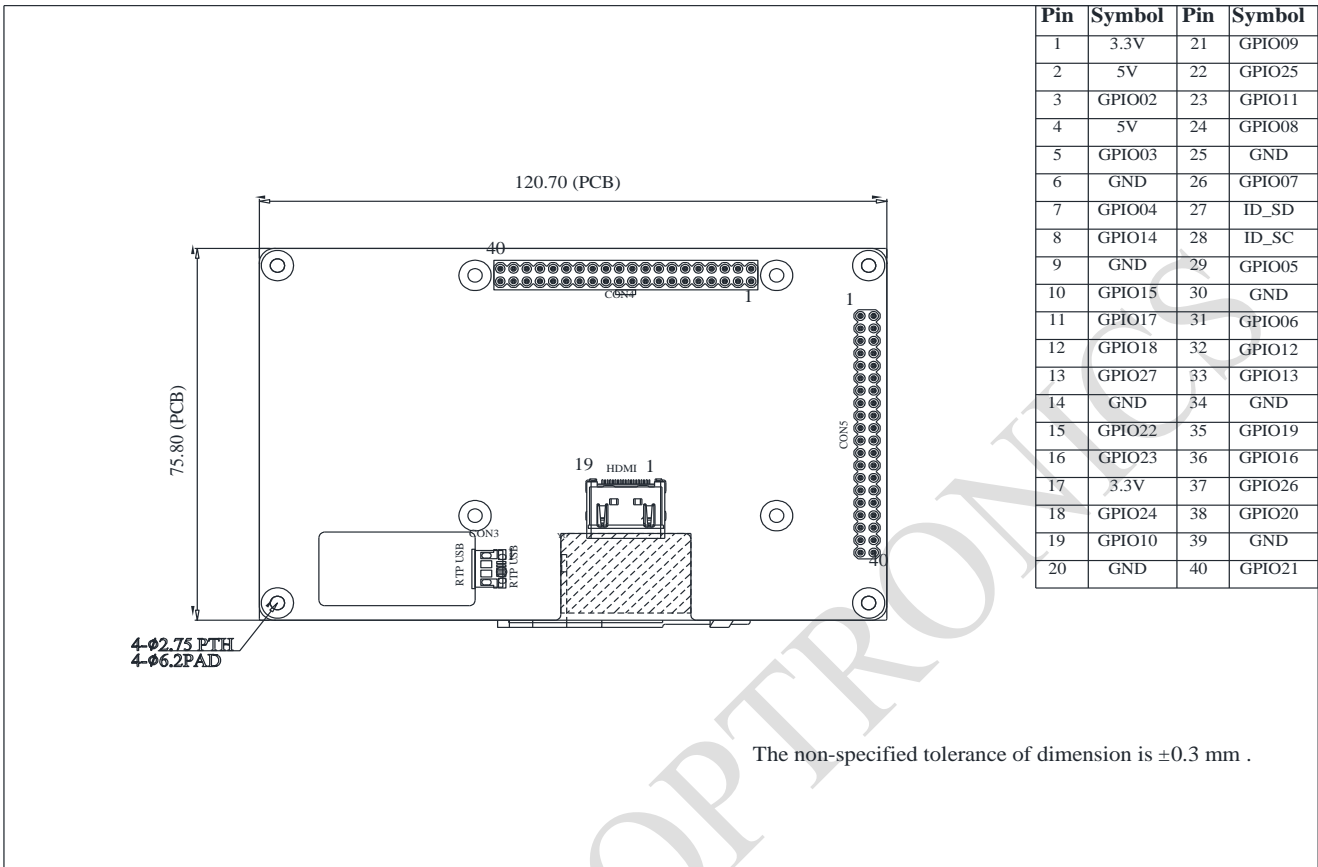

| Pin | Symbol | Pin | Symbol |
|-----|--------|-----|--------|
| 1   | 3.3V   | 21  | GPIO09 |
| 2   | 5V     | 22  | GPIO25 |
| 3   | GPIO02 | 23  | GPIO11 |
| 4   | 5V     | 24  | GPIO08 |
| 5   | GPIO03 | 25  | GND    |
| 6   | GND    | 26  | GPIO07 |
| 7   | GPIO04 | 27  | ID_SD  |
| 8   | GPIO14 | 28  | ID_SC  |
| 9   | GND    | 29  | GPIO05 |
| 10  | GPIO15 | 30  | GND    |
| 11  | GPIO17 | 31  | GPIO06 |
| 12  | GPIO18 | 32  | GPIO12 |
| 13  | GPIO27 | 33  | GPIO13 |
| 14  | GND    | 34  | GND    |
| 15  | GPIO22 | 35  | GPIO19 |
| 16  | GPIO23 | 36  | GPIO16 |
| 17  | 3.3V   | 37  | GPIO26 |
| 18  | GPIO24 | 38  | GPIO20 |
| 19  | GPIO10 | 39  | GND    |
| 20  | GND    | 40  | GPIO21 |

The non-specified tolerance of dimension is  $\pm 0.3$  mm .

## 6. Absolute Maximum Ratings

| Item                  | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP    | 0   | —   | +70 | °C   |
| Storage Temperature   | TST    | 0   | —   | +80 | °C   |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp.  $\leq 60^{\circ}\text{C}$ , 90% RH MAX. Temp.  $> 60^{\circ}\text{C}$ , Absolute humidity shall be less than 90% RH at  $60^{\circ}\text{C}$

RAYSTAR OPTRONICS

## 7. Electrical Characteristics

### 7.1. Operating conditions: (CON3.Pin1=GND, Pin2=VDD)

| Item                   | Symbol | Condition | Min | Typ | Max | Unit | Remark |
|------------------------|--------|-----------|-----|-----|-----|------|--------|
| Supply Voltage For LCM | VDD    | —         | 4.9 | 5   | 5.1 | V    | -      |
| Supply Current For LCM | IDD    | —         | —   | 350 | 380 | mA   | Note1  |

Note 1 : This value is test for VDD =5.0V , Ta=25°C only

Note 2 : Display with Raspberry pi the driver power is over USB , first make sure you have a 2A power supply, with a good quality USB cable, a thin wire power cable is no good. Make sure its 24AWG or smaller, shorter USB cables are better too.

Note3 : With regard to the resistive touch panel calibration, please refer to the datasheet of AR1100, which is in the link below:

<http://ww1.microchip.com/downloads/en/DeviceDoc/41604A.pdf>

RAYSTAR OPTROINCS

## 8.DC CHARATERISTICS

| Parameter                | Symbol   | Rating |     |        | Unit | Condition |
|--------------------------|----------|--------|-----|--------|------|-----------|
|                          |          | Min    | Typ | Max    |      |           |
| Low level input voltage  | $V_{IL}$ | 0      | -   | 0.3VDD | V    |           |
| High level input voltage | $V_{IH}$ | 0.7VDD | -   | VDD    | V    |           |

RAYSTAR OPTRONICS

## 9. Optical Characteristics

| Item   | Symbol | Condition.                        | Min                         | Typ. | Max. | Unit              | Remark            |        |
|--|--------|-----------------------------------|-----------------------------|------|------|-------------------|-------------------|--------|
| Response time                                  | Tr     | $\theta=0^\circ$ 、 $\phi=0^\circ$ | -                           | 10   | 20   | .ms               | Note 3,5          |        |
|  | Tf     |                                   | -                           | 15   | 30   | .ms               |                   |        |
| Contrast ratio                                 | CR     | At optimized viewing angle        | 400                         | 500  | -    | -                 | Note 4,5          |        |
| Color Chromaticity                             | White  | Wx                                | $\theta=0^\circ$ 、 $\phi=0$ | 0.26 | 0.31 | 0.36              | Note 2,6,7        |        |
|  |        | Wy                                |                             | 0.28 | 0.33 | 0.38              |                   |        |
| Viewing angle (Gray Scale Inversion Direction) | Hor.   | $\theta_R$                        | $CR \geq 10$                | 60   | 70   | -                 | Deg.              | Note 1 |
|  |        | $\theta_L$                        |                             | 60   | 70   | -                 |                   |        |
|  | Ver.   | $\phi_T$                          |                             | 40   | 50   | -                 |                   |        |
|  |        | $\phi_B$                          |                             | 60   | 70   | -                 |                   |        |
| Brightness                                     | -      | -                                 | 250                         | 350  | -    | cd/m <sup>2</sup> | Center of display |        |

Ta=25±2°C

Note 1: Definition of viewing angle range

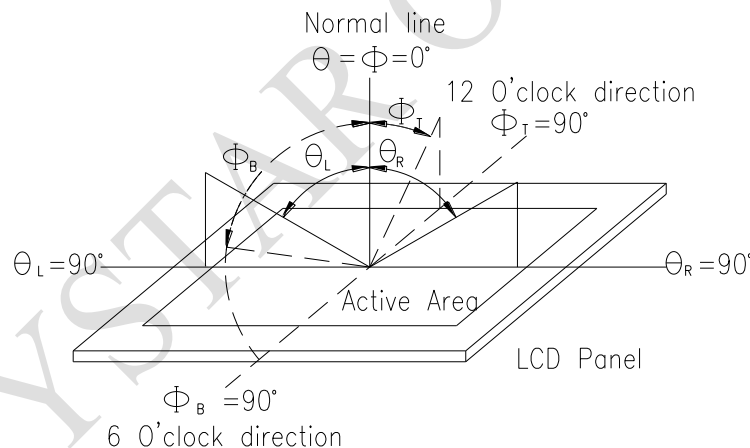
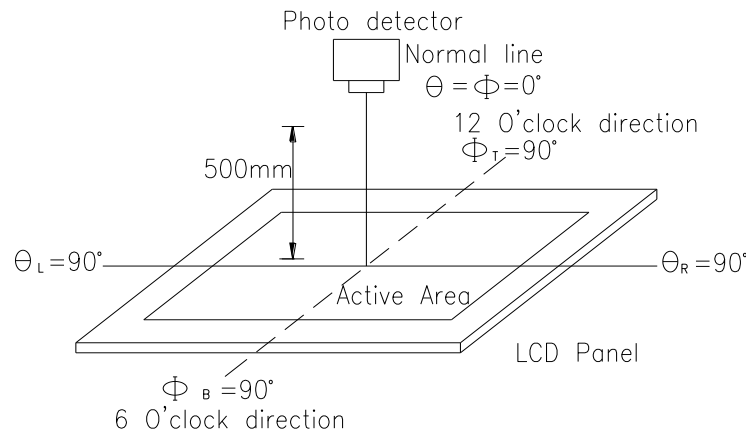


Fig. 9.1. Definition of viewing angle

Note 2: Test equipment setup:


After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.



**Fig. 9.2. Optical measurement system setup**

**Note 3: Definition of Response time:**

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time,  $T_r$ , is the time between photo detector output intensity changed from 90% to 10%. And fall time,  $T_f$ , is the time between photo detector output intensity changed from 10% to 90%

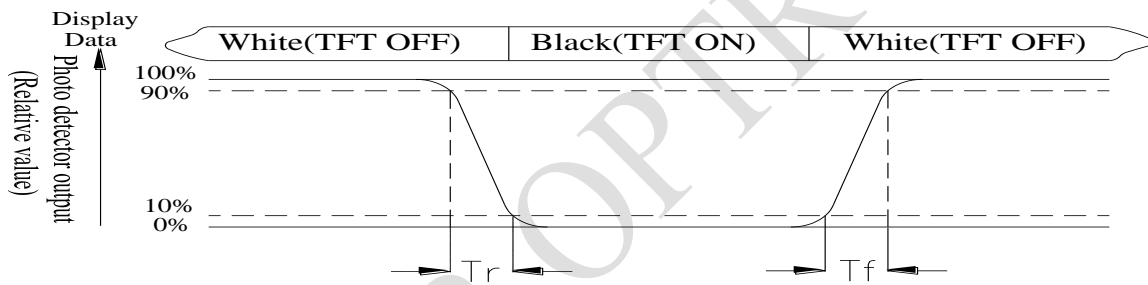

**Note 4: Definition of contrast ratio:**

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

**Note 5: White  $V_i = V_{i50} \pm 1.5V$**

**Black  $V_i = V_{i50} \pm 2.0V$**

“±” means that the analog input signal swings in phase with VCOM signal.

“±” means that the analog input signal swings out of phase with VCOM signal.

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.


**Note 6: Definition of color chromaticity (CIE 1931)**

Color coordinates measured at the center point of LCD

**Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.**

## 10. Reliability

Content of Reliability Test (Wide temperature, 0°C~70°C)

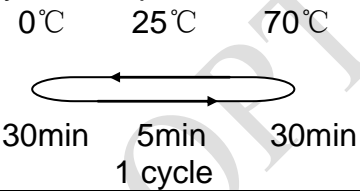
| <b>Environmental Test</b>            |  |  |             |
|--------------------------------------|--|--|-------------|
| <b>Test Item</b>                     | <b>Content of Test</b>   | <b>Test Condition</b>  | <b>Note</b> |
| High Temperature storage             | Endurance test applying the high storage temperature for a long time.  | 80°C<br>200hrs   | 2           |
| Low Temperature storage              | Endurance test applying the low storage temperature for a long time.   | 0°C<br>200hrs  | 1,2         |
| High Temperature Operation           | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.   | 70°C<br>200hrs   | —           |
| Low Temperature Operation            | Endurance test applying the electric stress under low temperature for a long time.   | 0°C<br>200hrs  | 1           |
| High Temperature/ Humidity Operation | The module should be allowed to stand at 60°C, 90%RH max   | 60°C, 90%RH<br>96hrs   | 1,2         |
| Thermal shock resistance             | The sample should be allowed stand the following 10 cycles of operation<br><div style="text-align: center;">  </div> | 0°C/70°C<br>10 cycles  | —           |
| Vibration test                       | Endurance test applying the vibration during transportation and using.   | Total fixed amplitude : 1.5mm<br>Vibration<br>Frequency : 10~55Hz<br>One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes | 3           |
| Static electricity test              | Endurance test applying the electric stress to the terminal.   | VS=±600V(contact)<br>,<br>±800v(air),<br>RS=330Ω<br>CS=150pF<br>10 times   | —           |

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

# 11.Touch Panel Information

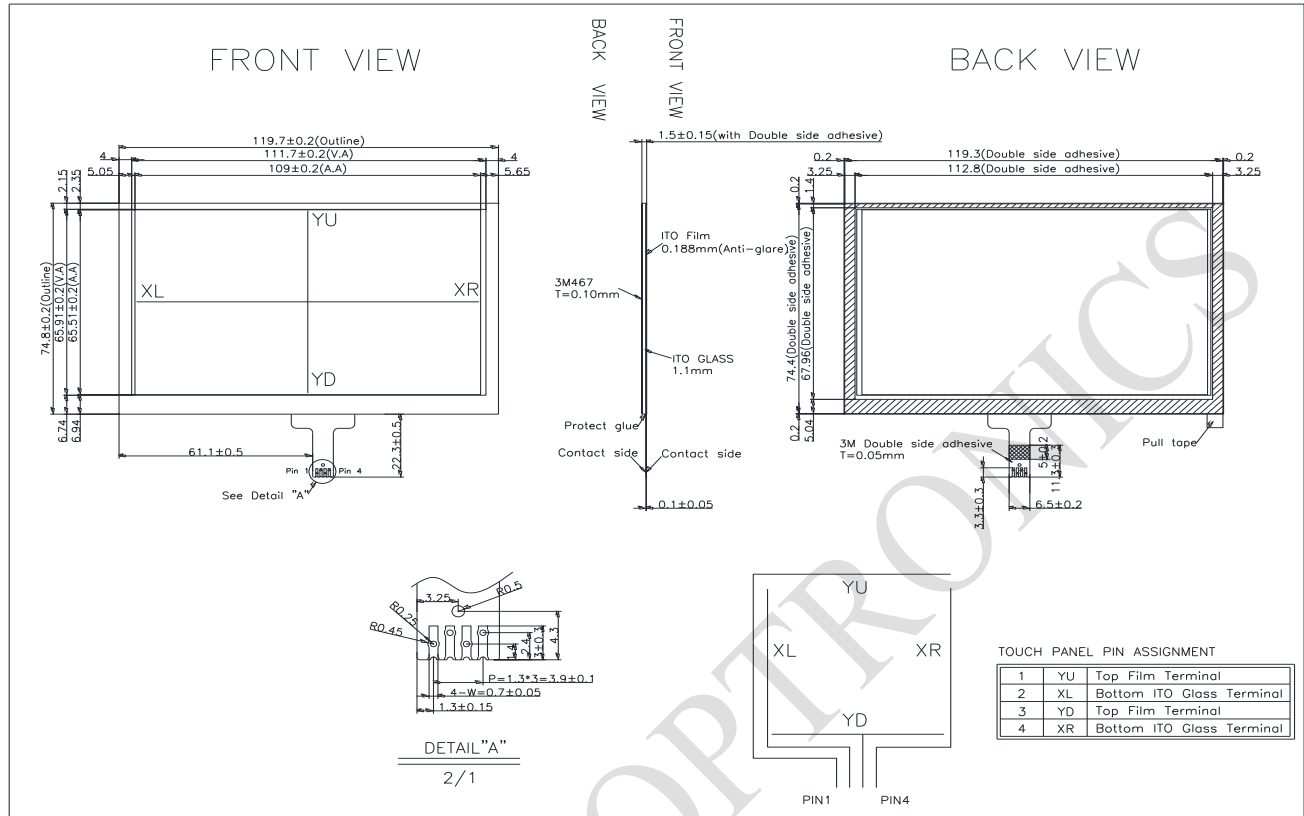

RAYSTAR OPTRO



---

**11.1. Resistance Touch Panel General Specifications**

| Item                  | Description                    |
|-----------------------|--------------------------------|
| Insulating resistance | $> 20\text{M}\Omega$ , 25V(DC) |
| Light transparence    | Min 70%                        |
| Structure type        | Anti-Glare                     |
| X resistance          | 200~1200 $\Omega$              |
| Y resistance          | 100~900 $\Omega$               |

RAYSTAR OPTRONICS

**LCM Sample Estimate Feedback Sheet**

**Module Number :** \_\_\_\_\_

**1 、 Panel Specification :**

|                            |                               |                                     |
|----------------------------|-------------------------------|-------------------------------------|
| 1. Panel Type :            | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 2. View Direction :        | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 3. Numbers of Dots :       | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 4. View Area :             | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 5. Active Area :           | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 6. Operating Temperature : | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 7. Storage Temperature :   | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 8. Others :                | _____                         |                                     |

**2 、 Mechanical Specification :**

|                             |                               |                                     |
|-----------------------------|-------------------------------|-------------------------------------|
| 1. PCB Size :               | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 2. Frame Size :             | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 3. Material of Frame :      | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 4. Connector Position :     | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 5. Fix Hole Position :      | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 6. Backlight Position :     | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 7. Thickness of PCB :       | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 8. Height of Frame to PCB : | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 9. Height of Module :       | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 10. Others :                | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |

**3 、 Relative Hole Size :**

|                             |                               |                                     |
|-----------------------------|-------------------------------|-------------------------------------|
| 1. Pitch of Connector :     | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 2. Hole size of Connector : | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 3. Mounting Hole size :     | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 4. Mounting Hole Type :     | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 5. Others :                 | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |

**4 、 Backlight Specification :**

|   |                               |                                     |
|---|-------------------------------|-------------------------------------|
| 1. B/L Type :                                     | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 2. B/L Color :                                    | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 3. B/L Driving Voltage (Reference for LED Type) : | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 4. B/L Driving Current :                          | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 5. Brightness of B/L :                            | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 6. B/L Solder Method :                            | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 7. Others :                                       | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |

>> **Go to page 2** <<

|   |                               |                                     |
|---|-------------------------------|-------------------------------------|
| <b>Module Number :</b> _____  |                               |                                     |
| <b>5 · <u>Electronic Characteristics of Module</u> :</b>  |                               |                                     |
| 1.Input Voltage :   | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 2.Supply Current :  | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 3.Driving Voltage for LCD :   | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 4.Contrast for LCD :  | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 5.B/L Driving Method :  | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 6.Negative Voltage Output :   | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 7.Interface Function :  | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 8.LCD Uniformity :  | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 9.ESD test :  | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 10.Others :   | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| <b>6 · <u>Summary</u> :</b>   |                               |                                     |
| <p style="text-align: right;">Sales signature : _____</p> <p style="text-align: right;">Customer Signature : _____      <u>Date</u> :   /   / _____</p> |                               |                                     |