

## High Speed Single Supply Quad Operational Amplifier

### ■ GENERAL DESCRIPTION

The **NJM2744** is a high-speed single supply quad operational amplifier. The low  $V_{OL}$  enables to treat small output signal on a single supply.

It has wide supply voltage range, +3V to +32V and high slew rate.

The **NJM2744** is suitable for power supply and motor driver units.


### ■ FEATURES

- Slew Rate 10V/ $\mu$ s typ.
- Capacitive Load Tolerance 1000pF typ.
- Output Voltage range 0.2V~3.7V at  $V^+=+5V$ ,  $R_L=2k\Omega$
- Operating Voltage 3V~32V
- Single Supply operation
- Bipolar Technology
- Package Outline DIP14, DMP14, SSOP14

### ■ APPLICATIONS

- Low side current sensing, Inverter motor control
- Power monitor module: UPS, PSU etc.
- Line driver, AD/DA buffer, FET driver


### ■ PIN CONFIGURATION




#### Pin Function

- |             |              |
|-------------|--------------|
| 1. A OUTPUT | 8. C OUTPUT  |
| 2. A -INPUT | 9. C -INPUT  |
| 3. A +INPUT | 10. C +INPUT |
| 4. $V^+$    | 11. $V^-$    |
| 5. B +INPUT | 12. D +INPUT |
| 6. B -INPUT | 13. D -INPUT |
| 7. B OUTPUT | 14. D OUTPUT |

### ■ PACKAGR OUTLINE



**NJM2744D**



**NJM2744M**



**NJM2744V**

# NJM2744

## ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise noted.)


PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V <sup>+</sup>	+36	V
Common Mode Input Voltage Range	V <sub>ICM</sub>	-0.3 ~ +36(Note1)	V
Differential Input Voltage Range	V <sub>ID</sub>	±36(Note1)	V
Power Dissipation (Note3)	P <sub>D</sub>	1400(DIP14) (Note2) 650(DMP14) (Note2) 560(SSOP14) (Note2)	mW
Operating Temperature Range	Topr	-40~+85	°C
Storage Temperature Range	Tstg	-50~+150	°C

(Note1) For supply voltage less than +36V, the absolute maximum input voltage is equal to supply voltage.

(Note2) On the PCB "EIA/JEDEC (76.2x114.3x1.6mm, 2 layers, FR-4)"

(Note3) See Figure.1 "Power Dissipation Derating Curve" when ambient temperature is over 25°C.

Figure.1 Power Dissipation Derating Curve

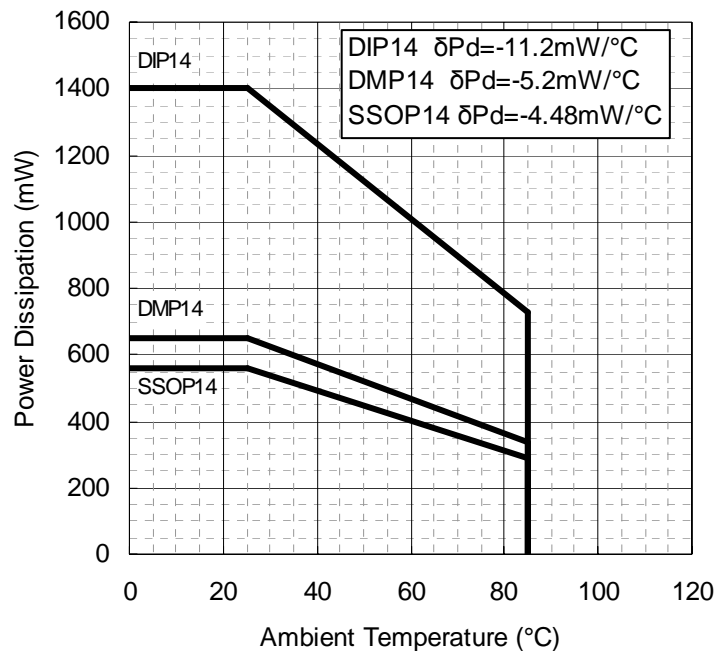

## ■ RECOMMENDED OPERATING CONDITION (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V <sup>+</sup>		3.0	-	32	V

## ■ ELECTRICAL CHARACTERISTICS

### ● DC CHARACTERISTICS ( $V^+/V^- = \pm 15V$ , $T_a = 25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	$I_{CC}$	No Signal, $R_s = 50\Omega$	-	7.5	10	mA
Input Offset Voltage	$V_{IO}$	$R_s = 50\Omega$	-	2	12	mV
Input Bias Current	$I_B$	$R_s = 50\Omega$	-	80	400	nA
Input Offset Current	$I_{IO}$	$R_s = 50\Omega$	-	5	75	nA
Voltage Gain	$A_V$	$R_L \geq 2k\Omega$ , $V_o = \pm 10V$	80	110	-	dB
Common Mode Rejection Ratio	CMR	$-15V \leq V_{ICM} \leq 12.5V$	55	75	-	dB
Supply Voltage Rejection Ratio	SVR	$3V \leq V^+ \leq 32V$	70	90	-	dB
Maximum Output Voltage1	$V_{OM1}$	$R_L \geq 10k\Omega$ to GND	13.7 -13.7	14 -14.8	-	V
Maximum Output Voltage2	$V_{OM2}$	$R_L \geq 2k\Omega$ to GND	13.5 -13.5	-	-	V
Source Output Current	$I_{SOURCE}$	$V_{IN+} = 1V$ , $V_{IN-} = 0V$ , $V_O = 0V$	10	30	-	mA
Sink Output Current	$I_{SINK}$	$V_{IN+} = 0V$ , $V_{IN-} = 1V$ , $V_O = 0V$	10	30	-	mA
Common Mode Input Voltage Range	$V_{ICM}$	CMR $\geq 55dB$	-15	-	12.5	V

### ● AC CHARACTERISTICS ( $V^+/V^- = \pm 15V$ , $T_a = 25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain Bandwidth Product	GB		-	2	-	MHz
Slew Rate	SR		-	10	-	V/ $\mu s$
Equivalent Input Noise Voltage	$V_{NI}$	$f = 1kHz$	-	40	-	nV/ $\sqrt{Hz}$
Capacitive Load Tolerance	$C_L$		-	1000	-	pF

## ■ ELECTRICAL CHARACTERISTICS

### ● DC CHARACTERISTICS ( $V^+ = +5V$ , $V^- = 0V$ , $T_a = 25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	$I_{CC}$	No Signal, $R_s = 50\Omega$	-	5.5	9	mA
Input Offset Voltage	$V_{IO}$	$R_s = 50\Omega$	-	2	12	mV
Input Bias Current	$I_B$	$R_s = 50\Omega$	-	80	400	nA
Input Offset Current	$I_{IO}$	$R_s = 50\Omega$	-	5	75	nA
Voltage Gain	$A_V$	$R_L = 2k\Omega$ , $V_o = \pm 1V$	80	110	-	dB
Common Mode Rejection Ratio	CMR	$0V \leq V_{ICM} \leq 2.8V$	50	60	-	dB
Supply Voltage Rejection Ratio	SVR	$3V \leq V^+ \leq 32V$	70	90	-	dB
Maximum Output Voltage1	$V_{OH}$	$R_L = 2k\Omega$ to GND	3.7	4	-	V
Maximum Output Voltage2	$V_{OL}$	$R_L = 2k\Omega$ to GND	-	0.1	0.2	V
Source Output Current	$I_{SOURCE}$	$V_{IN+} = 1V$ , $V_{IN-} = 0V$ , $V_O = 2.5V$	10	30	-	mA
Sink Output Current	$I_{SINK}$	$V_{IN+} = 0V$ , $V_{IN-} = 1V$ , $V_O = 2.5V$	10	30	-	mA
Common Mode Input Voltage Range	$V_{ICM}$	CMR $\geq 50dB$	0	-	2.8	V

### ● AC CHARACTERISTICS ( $V^+ = +5V$ , $V^- = 0V$ , $T_a = 25^\circ C$ , unless otherwise noted.)







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain Bandwidth Product	GB		-	2	-	MHz
Slew Rate	SR		-	7	-	V/ $\mu s$
Equivalent Input Noise Voltage	$V_{NI}$	$f = 1kHz$	-	40	-	nV/ $\sqrt{Hz}$
Capacitive Load Tolerance	$C_L$		-	1000	-	pF






Note: The common mode input voltage range of NJM2744 is shifted toward the  $V^-$  for single supply use.

At the low operating voltage, the center potential of the  $V^+$  and  $V^-$  may be out of the common mode voltage range.


In this case, shift the common mode input voltage toward the  $V^-$ .

## ■ TYPICAL CHARACTERISTICS

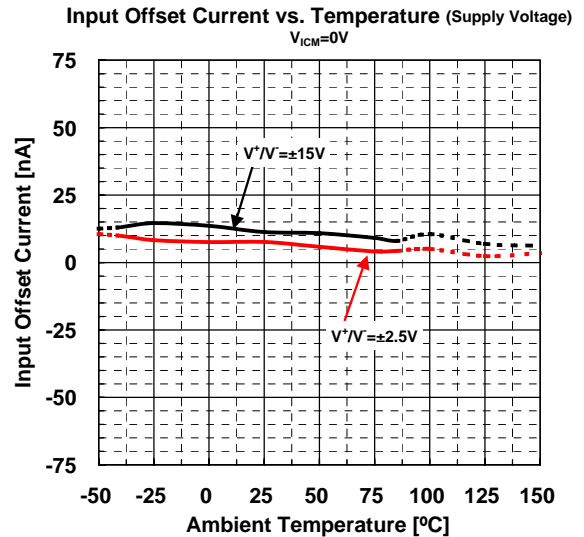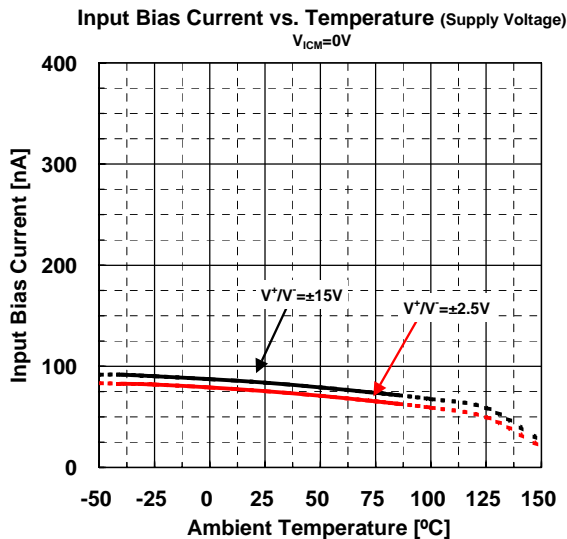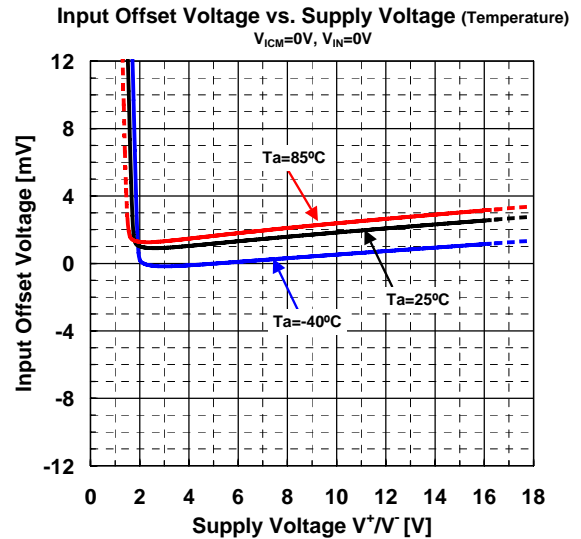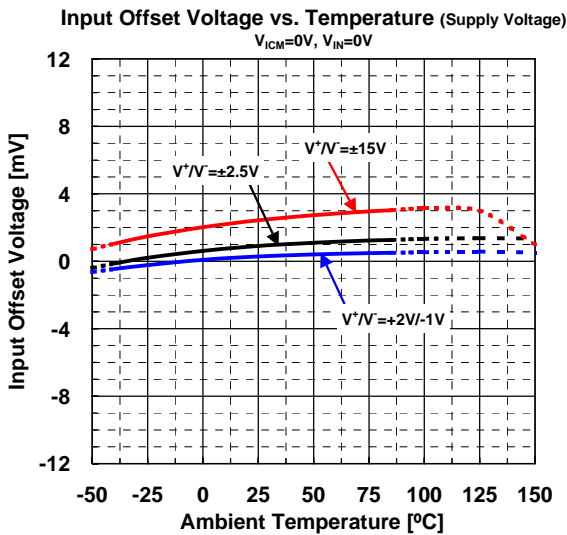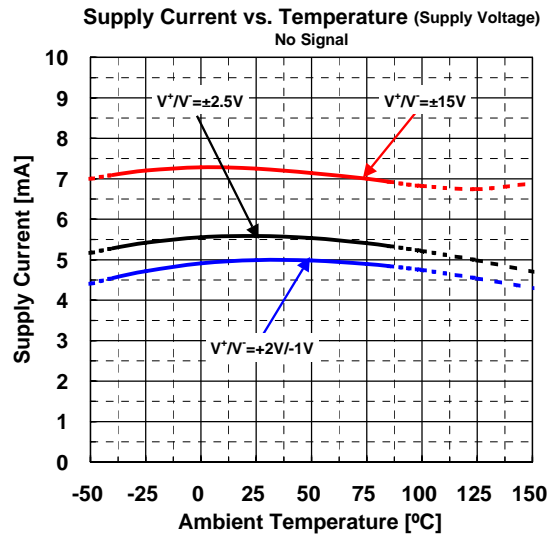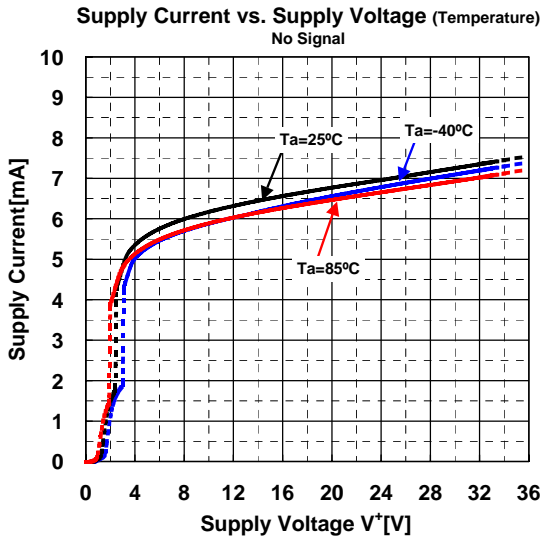


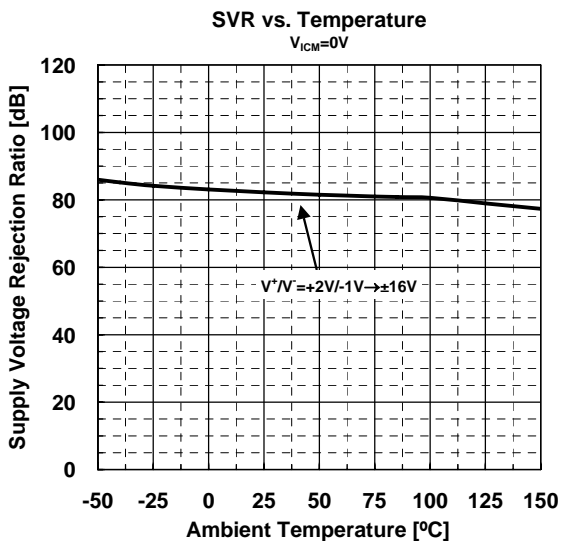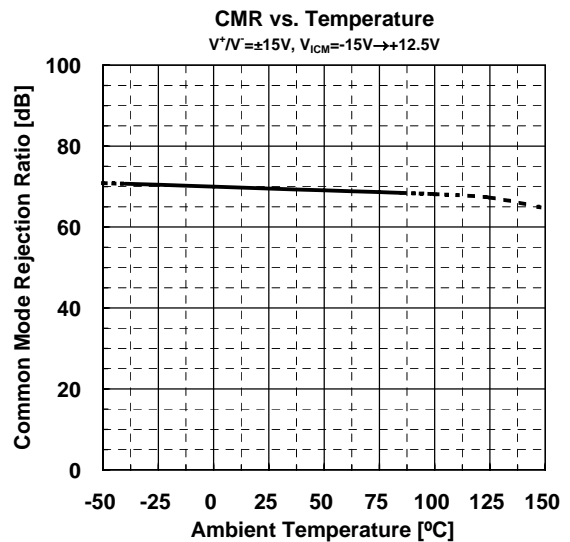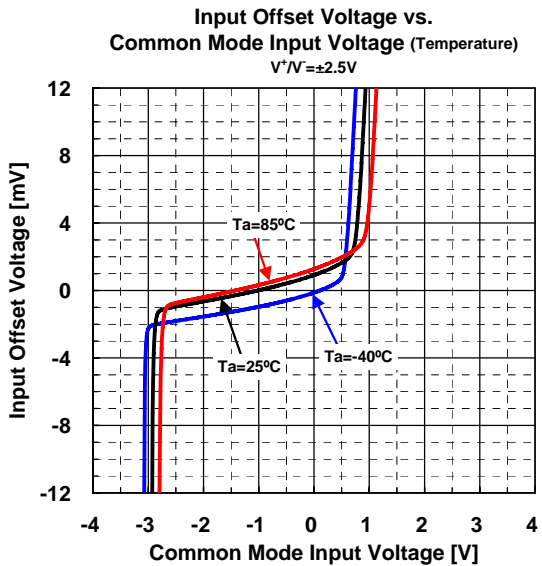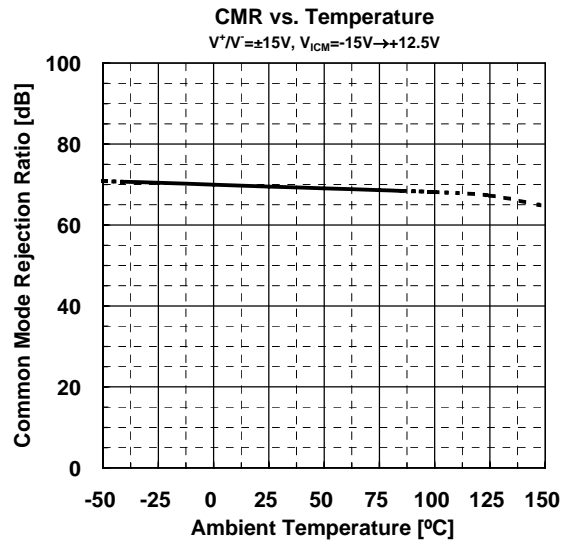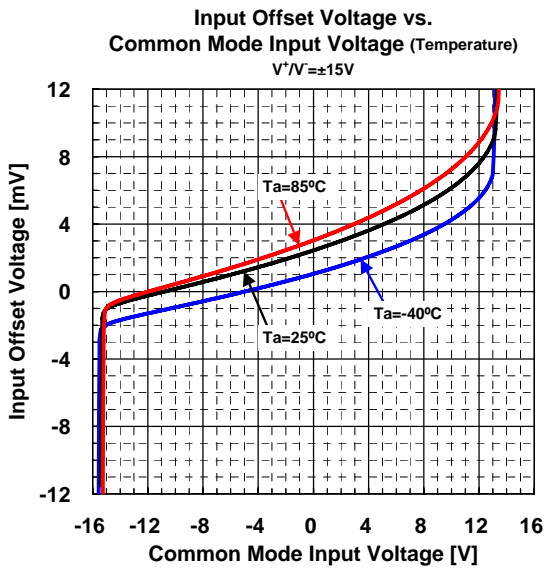


**Gain vs. Temperature**  
 $V^+V^- = \pm 15V$ ,  $R_L = 2k\Omega$  to  $0V$ ,  
 $C_L = 100p$  to  $0V$ ,  $V_O = -10V \rightarrow +10V$

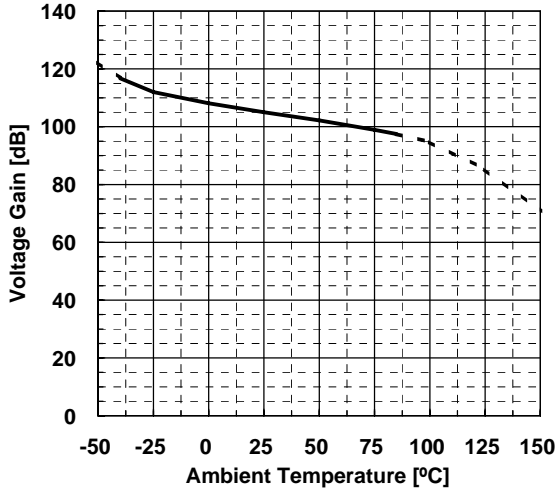


**Gain vs. Temperature**  
 $V^+V^- = \pm 2.5V$ ,  $R_L = 2k\Omega$  to  $0V$ ,  
 $C_L = 100p$  to  $0V$ ,  $V_O = -1V \rightarrow +1V$

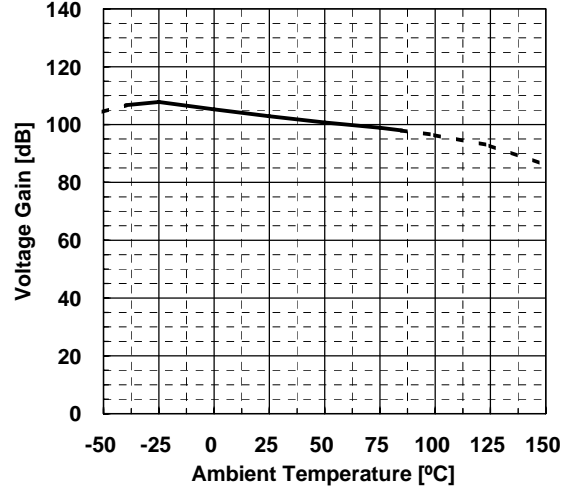


**Maximum Output Voltage vs. Load Resistance (Temperature)**  
 $V^+V^- = \pm 15V$ ,  $G_v = \text{open}$ ,  $R_L$  to  $0V$

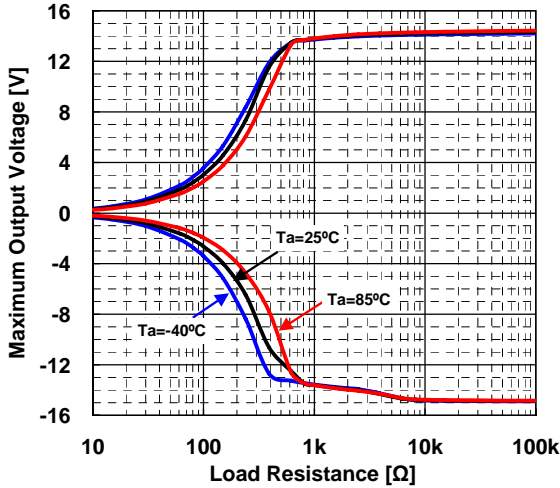


**Maximum Output Voltage vs. Load Resistance (Temperature)**  
 $V^+ = +5V$ ,  $R_L$  to  $0V$ ,  $G_v = \text{open}$






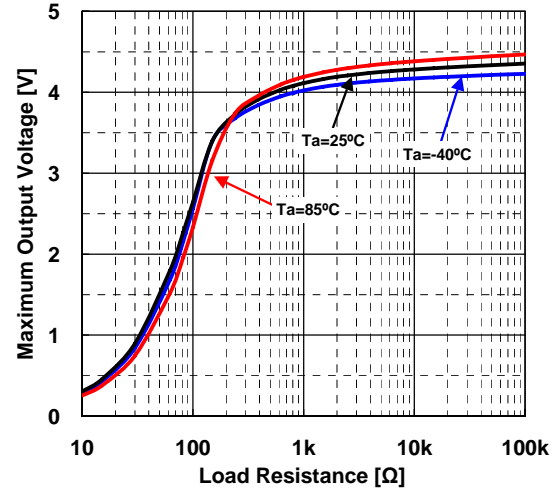


**Maximum Output Voltage vs. Supply Voltage (Temperature)**  
 $R_L = 2k$  to  $0V$

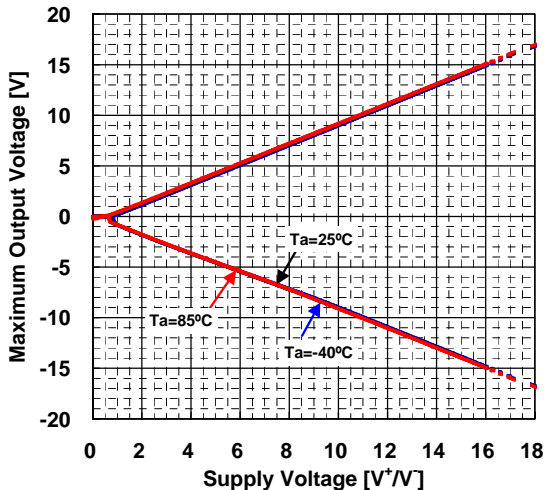


**Maximum Output Voltage vs. Supply Voltage (Temperature)**  
 $R_L = 2k$  to  $0V$

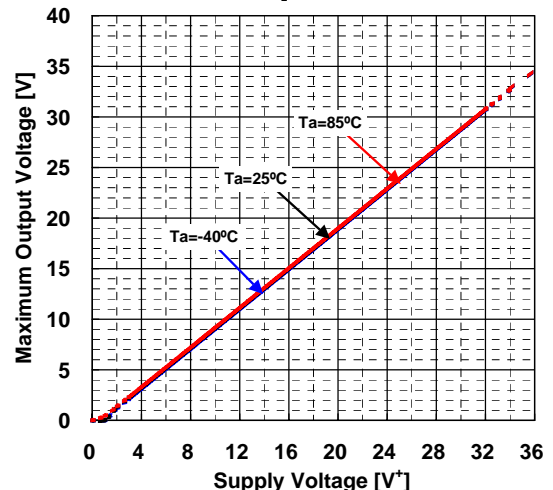

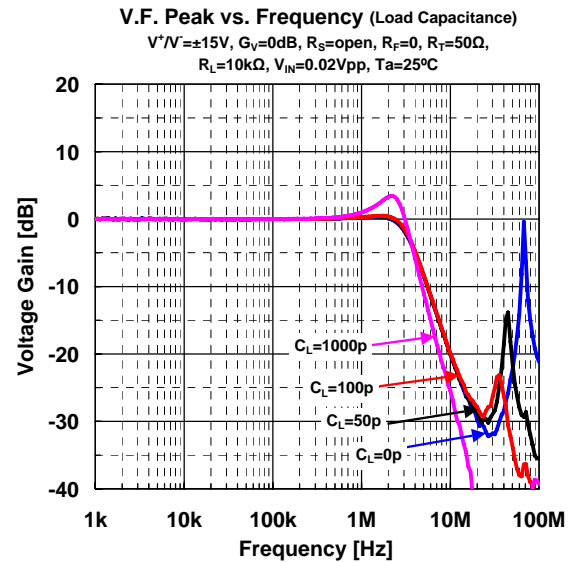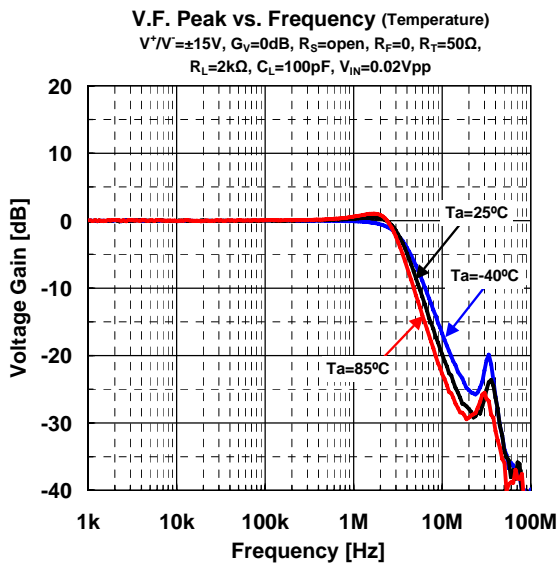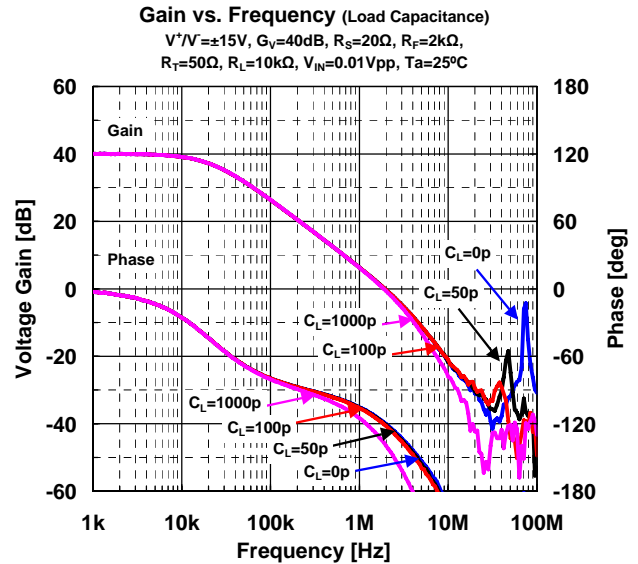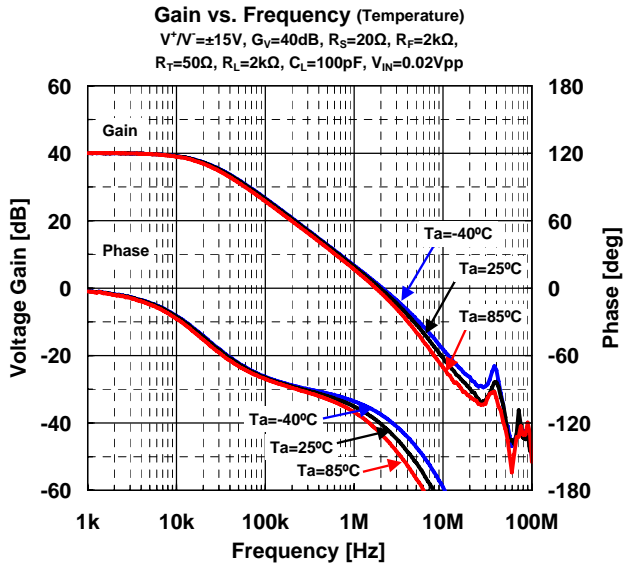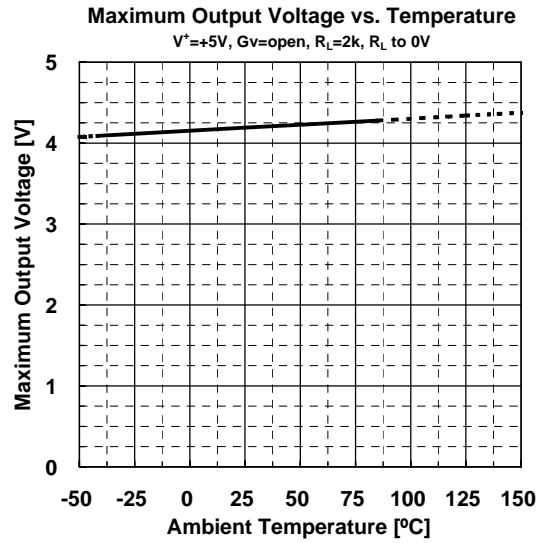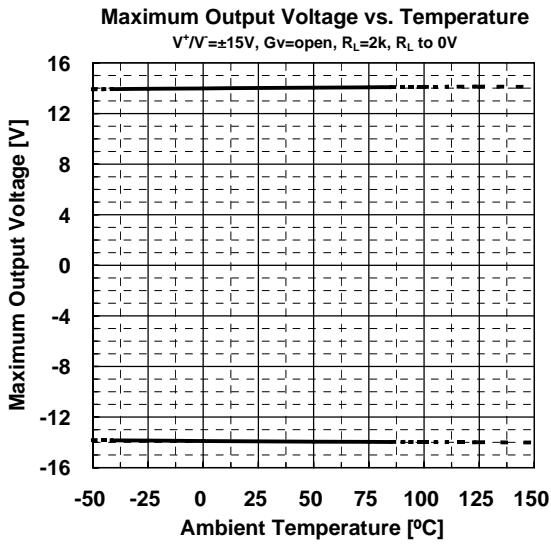

### Pulse Response (Temperature)


$V^*V = \pm 15V$ ,  $f = 250kHz$ ,  $V_{IN} = 4V_{p,p}$ ,  $G_v = 0dB$ ,  
 $R_T = 50\Omega$ ,  $R_F = 0\Omega$ ,  $R_G = open$ ,  $C_L = 100pF$ ,  $R_L = 10k\Omega$

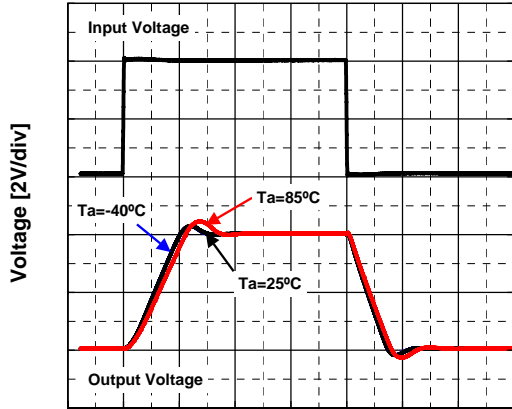

Time[0.5 $\mu$ sec/div]

### Pulse Response (Load Capacitance)


$V^*V = \pm 15V$ ,  $f = 250kHz$ ,  $V_{IN} = 4V_{p,p}$ ,  $G_v = 0dB$ ,  
 $R_T = 50\Omega$ ,  $R_F = 0\Omega$ ,  $R_G = open$ ,  $R_L = 10k\Omega$ ,  $T_a = 25^\circ C$

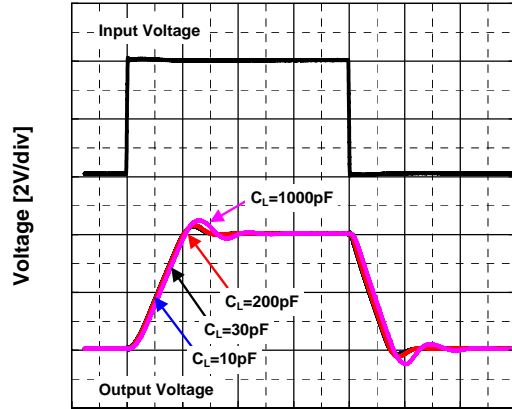

Time[0.5 $\mu$ sec/div]

### Pulse Response (Load Resistance)

$V^*V = \pm 15V$ ,  $f = 250kHz$ ,  $V_{IN} = 4V_{p,p}$ ,  $G_v = 0dB$ ,  
 $R_T = 50\Omega$ ,  $R_F = 0\Omega$ ,  $R_G = open$ ,  $C_L = 100pF$ ,  $T_a = 25^\circ C$

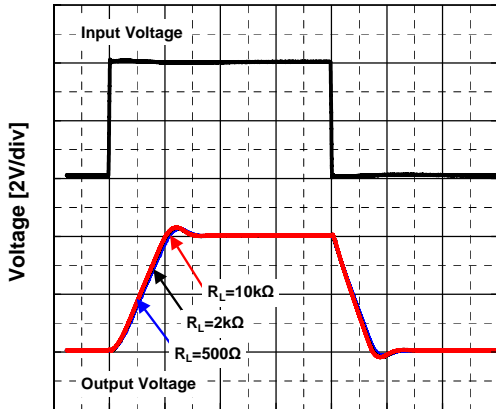

Time[0.5 $\mu$ sec/div]



## ■NOTE

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.