

# **Technical Data Sheet** 0603 Package Infrared Chip LED

### **SIR19-315/TR8**

#### **Features**

- Small double-end package
- Peak wavelength  $\lambda$  p=870nm
- Package in 8mm tape on 7" diameter reel
- Compatible with infrared and vapor phase reflow solder process.
- Pb free
- RoHS refer to SMD B type SGS report



- SIR19-315/TR8 is an infrared emitting diode in miniature SMD package which is molded in a water clear epoxy.
- The device is spectrally matched with silicon photodiode and phototransistor.

### **Applications**

- PCB mounted infrared sensor
- Infrared remote control units with high power requirement
- Scanner
- Infrared applied system

#### **Device Selection Guide**


LED Part No.	Chip Material	Lens Color	
SIR	AlGaAs	Water clear	



http:\\www.everlight.com Everlight Electronics Co., Ltd. Rev 1 Page: 1 of 9 Device No: DTS-193-193 Prepared date: 02-15-2006 Prepared by : Posen Hsu



### **Package Dimensions**

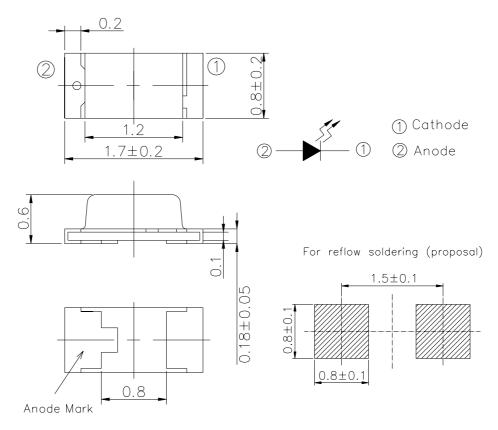

**Notes:** 1.All dimensions are in millimeters

2.Tolerances unless dimensions ±0.1mm

# **Absolute Maximum Ratings (Ta=25℃)**

Parameter	Symbol	Rating	Units
Continuous Forward Current	$I_{\mathrm{F}}$	70	mA
Reverse Voltage	$V_R$	5	V
Operating Temperature	$T_{opr}$	-25 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	$T_{stg}$	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Soldering Temperature	$T_{sol}$	260	$^{\circ}\! \mathbb{C}$
Power Dissipation at(or below)	$P_d$	110	mW
25°C Free Air Temperature			

**Notes:** \* Soldering time ≤ 5 seconds.

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 2 of 9

Device No: DTS-193-193 Prepared date: 02-15-2006 Prepared by: Posen Hsu



# **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Radiant Intensity	Ie	$I_F=20\text{mA}$	1.0	1.3		mW/sr
Peak Wavelength	λр	$I_F=20\text{mA}$	860	870	900	nm
Spectral Bandwidth	Δλ	I <sub>F</sub> =20mA		45		nm
Forward Voltage	$V_{\mathrm{F}}$	I <sub>F</sub> =20mA	1.20	1.35	1.70	V
Reverse Current	$I_R$	V <sub>R</sub> =5V			10	μΑ
View Angle	2 θ 1/2	I <sub>F</sub> =20mA		140		deg

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 3 of 9

Device No: DTS-193-193 Prepared date: 02-15-2006 Prepared by: Posen Hsu



0

-25

-20

# **SIR19-315/TR8**

### **Typical Electro-Optical Characteristics Curves**

Fig.1 Forward Current vs. Ambient Temperature

140
120
100
80
60
40
20

20

40

Ambient Temperature (°C)

60

80

100

Fig.2 Spectral Distribution




Fig.3 Peak Emission Wavelength Ambient Temperature





Fig.4 Forward Voltage vs.

Ambient Temperature(°C)



Everlight Electronics Co., Ltd. Device No: DTS-193-193 http:\\www.everlight.com Prepared date: 02-15-2006 Rev 1

Page: 4 of 9

Prepared by : Posen Hsu



### **Typical Electro-Optical Characteristics Curves**

Fig.5 Relative Intensity vs.

Ambient Temperature(°C)





Fig.6 Relative Radiant Intensity vs.

Angular Displacement

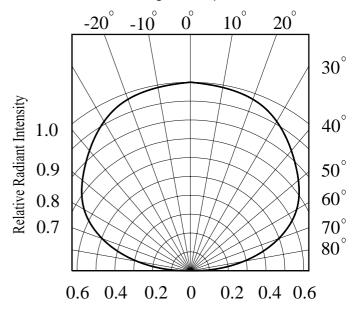

Everlight Electronics Co., Ltd. Device No: DTS-193-193 http:\\www.everlight.com Prepared date: 02-15-2006 Rev 1

Page: 5 of 9

Prepared by : Posen Hsu



#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
  - 2.3 The LEDs should be used within a year.
  - 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
  - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
  - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

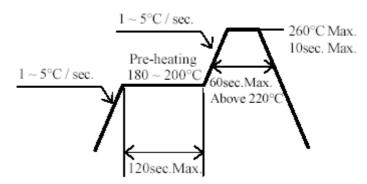

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 6 of 9

Device No: DTS-193-193 Prepared date: 02-15-2006 Prepared by: Posen Hsu




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

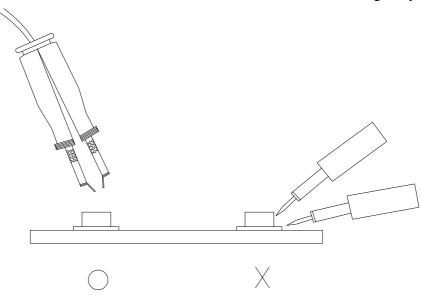


Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 1 Page: 7 of 9


Device No: DTS-193-193 Prepared date: 02-15-2006 Prepared by: Posen Hsu



### **Package Dimensions**

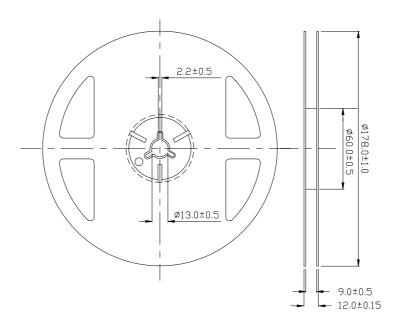

### **Taping Dimensions**

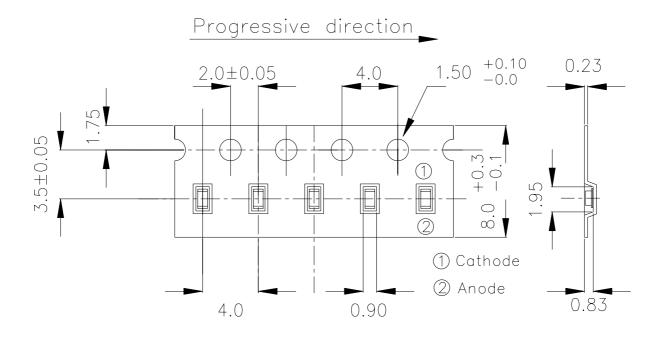

#### Unit: mm

Everlight Electronics Co., Ltd. Device No: DTS-193-193

 $http: \hspace{-0.05cm} \backslash www.everlight.com$ 

Rev 1

Page: 8 of 9

Prepared date: 02-15-2006 Prepared by: Posen Hsu



### **Packing Quantity Specification**

1.3000 Pcs/1 Volume , 1 Volume/1 Bag

2.10Boxes/1Carton

### **Label Form Specification**



CPN: Customer's Production Number

P/N : Production Number QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

**REF:** Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

#### **Notes**

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Everlight Electronics Co., Ltd.

Device No: DTS-193-193

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

http:\\www.everlight.com

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com Rev 1 Page: 9 of 9

Prepared date: 02-15-2006 Prepared by: Posen Hsu