

LIGHT ENGINE 560 x 40mm 6.000lm

Issue Date	Jul - 2017
Issued by	Wilbur C.


Applications

- Troffers
- Battens
- Retrofit T8 / HO
- Linear Highbay



Characteristics

- Module Efficacy – up to 152 lm/W
- L70 > 50.000 hours
- CRI > 80 (Typ.85)
- 03 SDCM
- CCTs 3.000K / 4.000K / 5.000K
- 05 years warranty

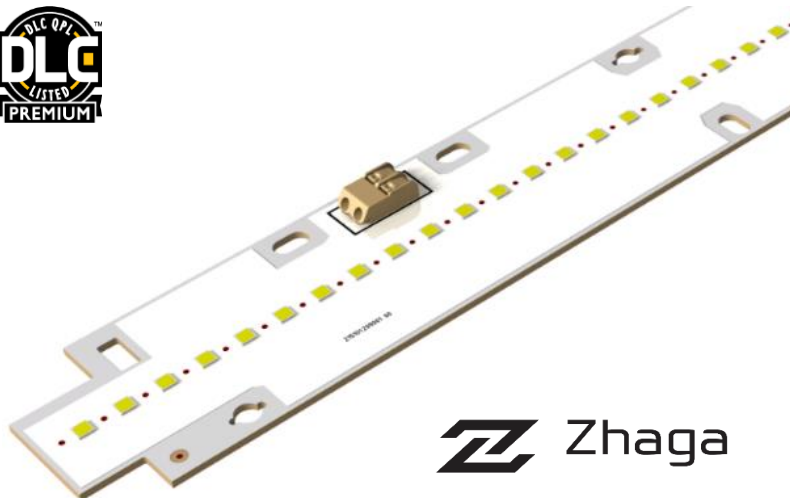

Zhaga

DRIVE CURRENTS

Parameter	Nominal	Max
Light Engine Linear Performance DLC PREMIUM	700 mA	700 mA

MODULE TEMPERATURES

Parameter	Nominal	Max
Tc (case temperature at Tc point)	60 °C	85 °C

PRODUCT PART NUMBER

80087400100	80087500100	80087600100
3.000 K	4.000 K	5.000 K

TECHNICAL INFORMATION

CCT	LED Driver Current (mA)	# LEDs	Luminous Flux (lm)*	Forward Voltage (V)	LED Forward Current (mA)	TC (°C)	Power (W)	Efficacy (lm/W)*
3.000 K	700	70	6.267	57,1	100	60	40,0	157
4.000 K	700	70	6.360	57,1	100	60	40,0	159
5.000 K	700	70	6.576	57,1	100	60	40,0	164

LED TYPE

Manufacturer: Nichia Corporation

LED Series: 757

