



# 金龙机电股份有限公司

JINLONG MACHINERY & ELECTRONICS CO., LTD.

www.jinlong-machinery.com

sales@jinlong-machinery.com

## PRODUCT SPECIFICATION

客户信息	客户名称/Customer	
	客户代码/Part No.	
	客户确认签章 /Customer Approved Signatures	

K O T L	文件编号/Spec No.		
	品名描述/ Product Description	扁平振动马达 Coin type vibration motor	
	型号/Part No.	C0720B001F	
	送样日期/Date		
	设计/Designed by	审核/Checked by	批准/Approved by

**规格书内容 Contents**

1. 重要提示/Importance Notes	3/9
2. 更改记录/Revised Record	3/9
3. 试用范围/Application	4/9
4. 试用条件/Operation condition	4/9
5. 测定条件/Measuring Conditions	4/9
6. 电气性能/Electrical Characteristics	5/9
7. 机械特性/Mechanical Characteristic	5/9
8. 可靠性测试/Reliability Test	6/9
9. 可靠性测试判定标准/Requirement After Reliable Test	6/9
10. 使用注意事项/Cautions for Use	7/9
11. 包装/Packing Require	8/9
12. 外形图/Motor Outline Drawing	9/9



--	--	--	--	--	--

### 3. 试用范围/Application

本说明书适用于扁平式永磁直流电机 C0720B 系列.

This specification applies to coin type permanent-magnetic motors DC model C0720B.

### 4. 试用条件/Operating Condition

项目/Item		标准/Specifications
4-1	额定电压/Rated voltage	3.0V DC
4-2	使用电压/Operating voltage	2.7~3.3V DC
4-3	旋转方向/Rotation	CW (clockwise) or CCW (counter clockwise)
4-4	工作环境/ Operating environment	-20~60℃, 常湿/Ordinary Humidity:65±20%RH
4-5	存储环境/ Storage environment	-30~70℃, 常湿/Ordinary Humidity:65±20%RH

### 5. 测定条件/Measuring Conditions

项目/Item		标准/Specification
5-1	温度/Temperature	25±3℃
5-2	湿度/Humidity	65±20% RH
5-3	电源电压/Power supply	稳压直流电源/Constant Power supply 3.0V DC.

### 6. Electrical Characteristics

项目/Item	标准/Specification	条件/Condition
6-1 额定转速/ Rated speed	10000rpm MIN	额定电压下/At rated voltage.
6-2 额定电流/ Rated current	80mA Max	
6-3 启动电/ Starting voltage	2.5V DC Max	/
6-5 绝缘电/ Insulation resistance	10MΩ Min	100V 直流电压下, 在线路与壳体间/At DC 100V between wire and case.
6-6 电阻/ Terminal resistance	43 Ω ± 15% (单相/single posture)	At 25°C

### 7. 机械特性/Mechanical Characteristic

项目/Item	标准/Specification
7-1 测量模具/using dummy set (10g) 设备/equipment: PV-90B 感测器/sensor: VM-83 输入电压: 3.0V input voltage : 3.0V 振动量/Vibrations: 0.8G (AVG.)	<p>马达/Vibration 模板/JIG 传感器/Sensor</p>
7-2 机械噪音/Mechanical noise 在额定电压下/At rated voltage. 背景噪音/Back ground noise 28dB (A) Max.	<p>50dB (A) Max.</p> <p>Microphone Motor Test block Foam</p>

**8. 可靠性试验 /Reliability Test**

NO.	Item	Test condition	Requirements
8-1	寿命/Life time	额定电压/ Rated voltage: 3.0V DC 试验模式/ Test mode: 2s On, 2s Off, as one cycle. 循环次数/ Test cycle:30000 cycles	在常温常湿下放置 2 小时候后, 马达特性应符合 9-1, 9-2, 98-3 的要求./After 2 hours exposure in ordinary temperature and humidity, Motors shall be approved as specified in item 9-1, 9-2, 9-3.
8-2	低温存储 /Storage in cold	温度/Temperature: -40℃ 时间/Time: 96h	在常温常湿下放置 2 小时候后, 马达特性应符合 9-1, 9-2, 98-3 的要求./After 2 hours exposure in ordinary temperature and humidity, Motors shall be approved as specified in item 9-1, 9-2, 9-3.
8-3	高温存储 /Storage in heat	温度/Temperature: 80℃ 时间/Time: 96h	
8-4	高温高湿 /High Humidity exposure	温度/Temperature: +60℃ 湿度/Humidity: 90%RH 放置时间/ Exposure time: 168h 无水气凝结/ No condensation of moisture	
8-5	振动 /Vibration	全振幅/Displacement: 1.5mm (p-p) 频率/Frequency: 10~55Hz 加速度/Acceleration: 22m/s <sup>2</sup> 周期/Period: 10 分钟范围内 (10~55~10Hz)/ 10 Minutes log sweep (10~55~10Hz) 条件/Condition: 在样机中, 在 3 个垂直的轴方向每个方向做 10 分钟的测试。Samples shall be applied for a period of 10 minutes in three axial directions.	在常温常湿下放置 2 小时候后, 马达特性应符合 9-1, 9-2, 98-3 的要求./After 2 hours exposure in ordinary temperature and humidity, Motors shall be approved as specified in item 9-1, 9-2, 9-3.

**9. 判定标准/Requirement After Reliable Test**

NO.	项目/Item	标准/Specification
9-1	额定转速/Rated speed	初始值的±30% /Initial data±30%
9-2	额定电流/Rated Current	初始值的±30% /Initial data±30%
9-3	启动电压/Starting voltage	≤ 2.5V

**10.注意事项/Cautions**

10-1 必须按照规格书标准使用, 否则性能和寿命都将受到相当地减少, 必须注意电压的使用范围。

Unless it is used in accordance with the specifications, the performance and life may be considerably reduced. Due attention should be paid to voltage and range for use.

10-2 建议马达在六个月内使用, 不要在以下环境中使用及保存:

1. 高温和高湿的场所;
2. 腐蚀性气体,如: H<sub>2</sub>S、SO<sub>2</sub>、NO<sub>2</sub>、Cl<sub>2</sub>;
3. 生锈场所。

Advice uses this motor within 6 months as avoiding as possible. Avoid use or save the motor in the following environment.

1. High temperature and high humidity area
2. Corrosive gas such as H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, Cl<sub>2</sub>.
3. Dusty area.

10-3 注意处理马达的工作环境, 避免含铁质等物体被马达吸住, 否则马达将会产生噪声, 性能会降低, 从而减少产品可靠性。

Due attention must be paid to the handling and working environments because such objects as iron powder if attracted by the motor magnet, will cause noise, characteristic deterioration thus reducing the reliability.

10-4 应确信本产品不会与相关标准、法律、政令相背。

Please confirm enough no problems of standards and laws and ordinances on your cellular phone.

10-5 拿马达时, 要轻拿轻放。

To handle the motor, hold the motor case softly.

10-6 钢板面或边缘有少许锈斑是允许的。


Rust of plate (steel) and similar edge should be OK.

10-7 我司遵循持续发展的策略, 在不预先通知的情况下, 有对产品(部品)进行修改和改进的权利, 当然这些都不会影响马达的特性及使用功能。

Our company follows the sustainable developing strategy, and have the right to make changes and improvements to our product without giving notice in advance. Of course, these changes and improvements will not affect the characteristics and function of the motor.

**11. 包装/Packing Require**

**扁平系列马达包装**  
Pack drawing of coin type

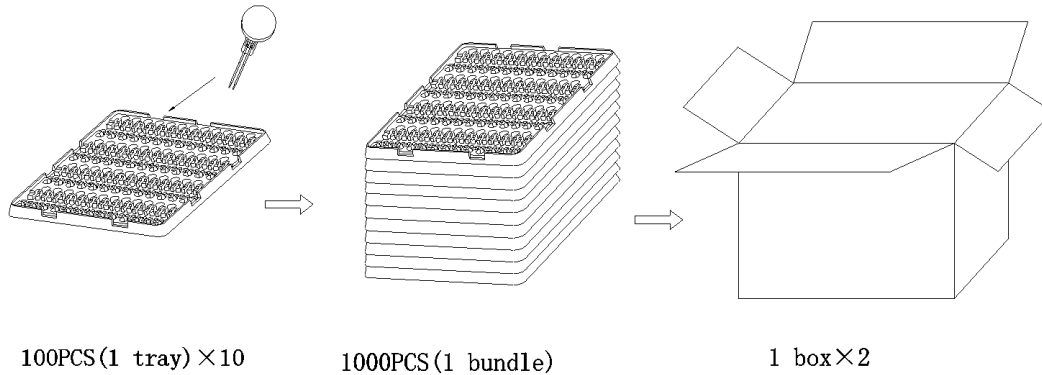

Remarks:  
4000PCS/CTN: 45cm x 28cm x 20cm  
6000PCS/CTN: 45cm x 28cm x 30cm

包装试验要求:  
沿外包装箱±x, ±y和±z方向, 距水泥地面1.5m高度, 各自由跌落2次, 马达应无机械损伤, 电气性能仍符合标准要求。

Drop Test with carton:  
Drop the carton in the axial directions of ±x, ±y, ±z onto the concrete floor from 1.5m height, drop twice each direction. After drop test, no mechanical damage to motors, and the electrical performances remain unchanged.

