

DETAILS


Product Number	CN13130_MIRELLA-50-S-DL-PF
Family	Mirella
Type	RefPack
Color	metal
Diameter	49,9 mm
Height	25,5 mm
Style	round
Optic Material	PC
Holder Material	PC
Fastening	screw, glue
Status	production ready
ROHS Compliant	Yes
Date Updated	25/02/2016




OPTICAL PROPERTIES

LED	Viewing	Light	Efficiency		
	Angle	Beam	ciency	cd/lm	Connector
Duris S8	sim: 14	Spot	sim: 90 %	sim: 7.400	-
Soleriq S9	sim: 24	Spot	sim: 86 %	sim: 2.900	LEDiL: LEDiL
COB 4W	14 deg	Spot	86 %	4.400	-
CLL01x	15 deg	Spot	84 %	5.800	-
MK-R	15 deg	Spot	82 %	4.900	-
XHP50	15 deg	Spot	85 %	5.300	-
XHP70	17 deg	Spot	84 %	4.300	-
MHD-E/G	17 deg	Spot	87 %	4.100	-
CLU700	17 deg	Spot	82 %	4.000	-
MT-G2	18 deg	Spot	85 %	4.600	-
Duris S10	18 deg	Spot	80 %	3.600	LEDiL: LEDiL
MT-G	19 deg	Spot	85 %	4.400	-
CLL02x/CLU02x (LES10)	20 deg	Spot	83 %	4.200	-
Mini Zenigata (GW6BM)	20 deg	Spot	84 %	3.200	-
ZC4/6	21 deg	Spot	83 %	3.400	-
CXM-9	23 deg	Spot	86 %	2.900	-


Relative intensity of Mirella-S-DL-4WLG

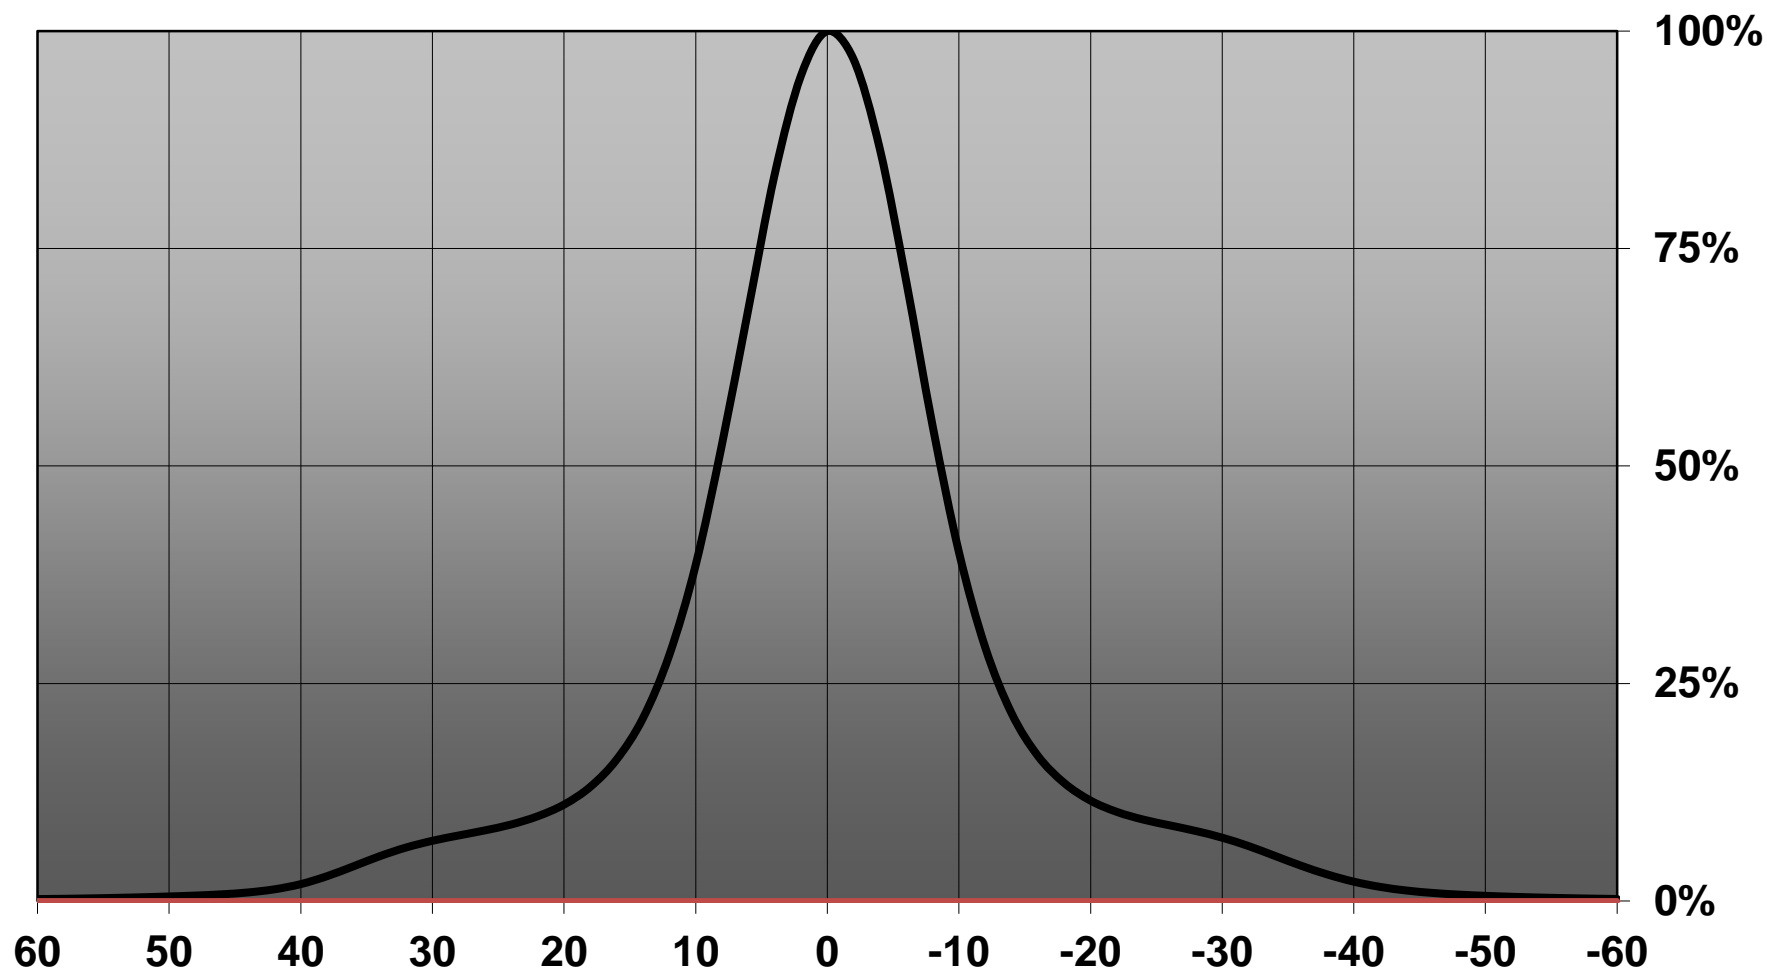


Relative intensity of CN13130_MIRELLA-50-S-DL-PF-(CLL010)

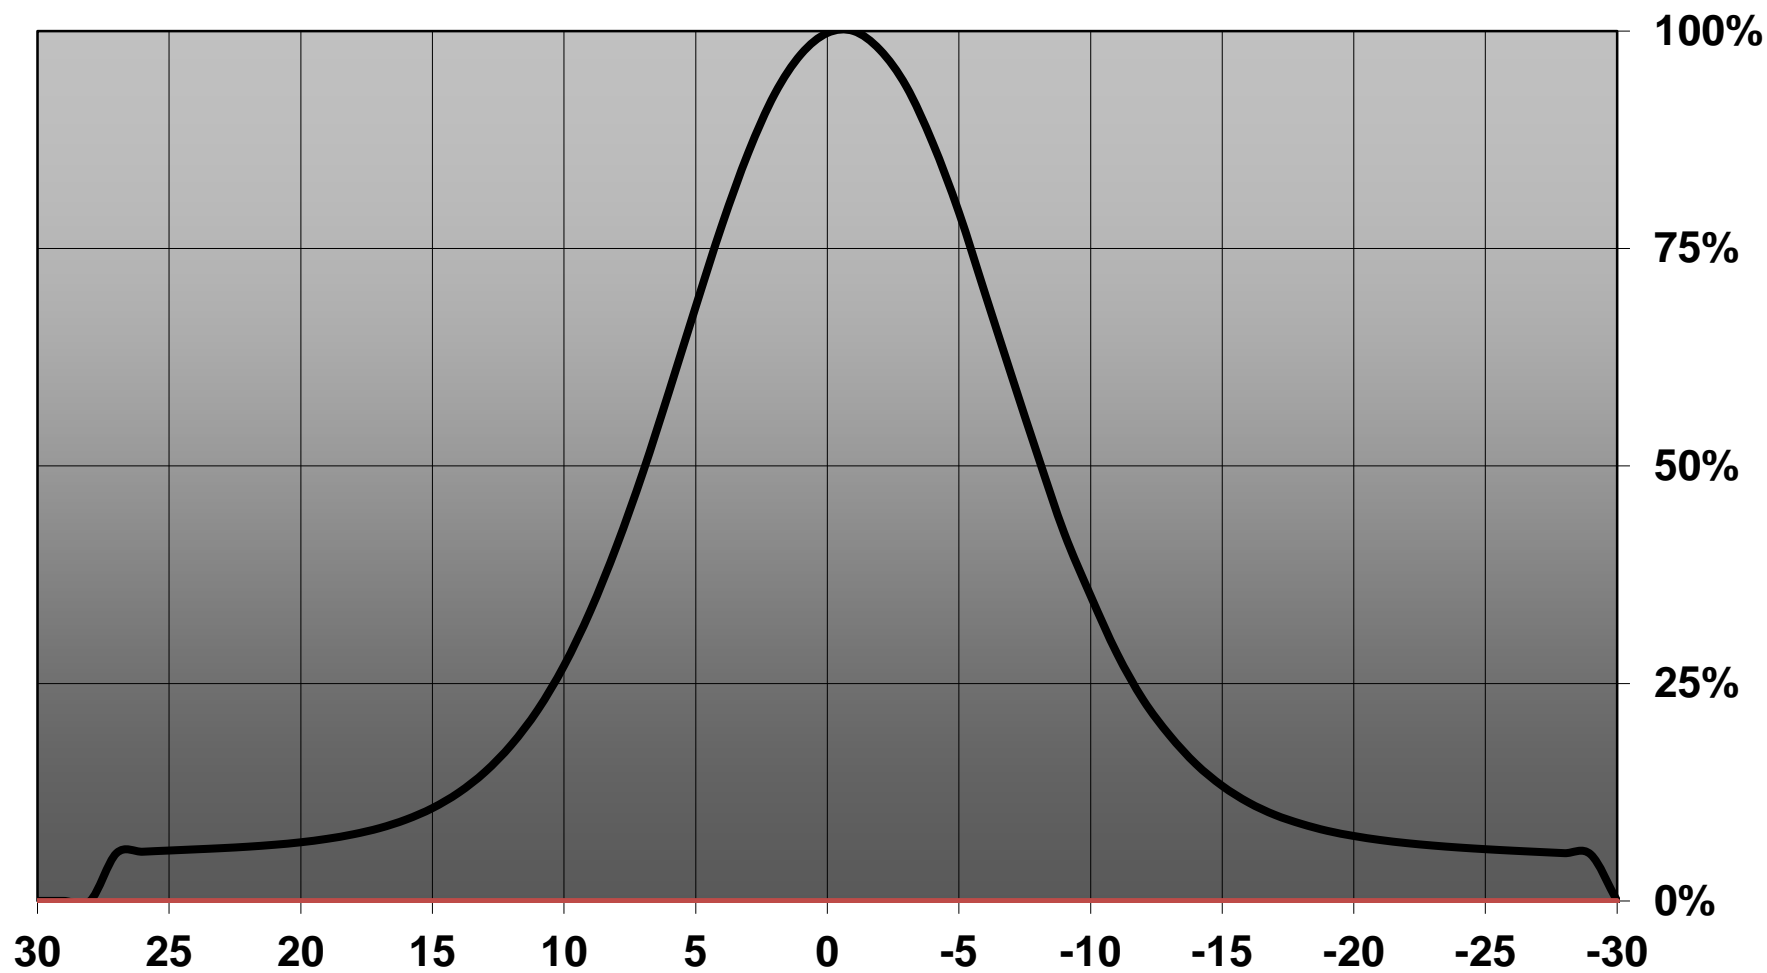


Relative intensity of CN13130_MIRELLA-50-S-DL-PF-(MTG2)

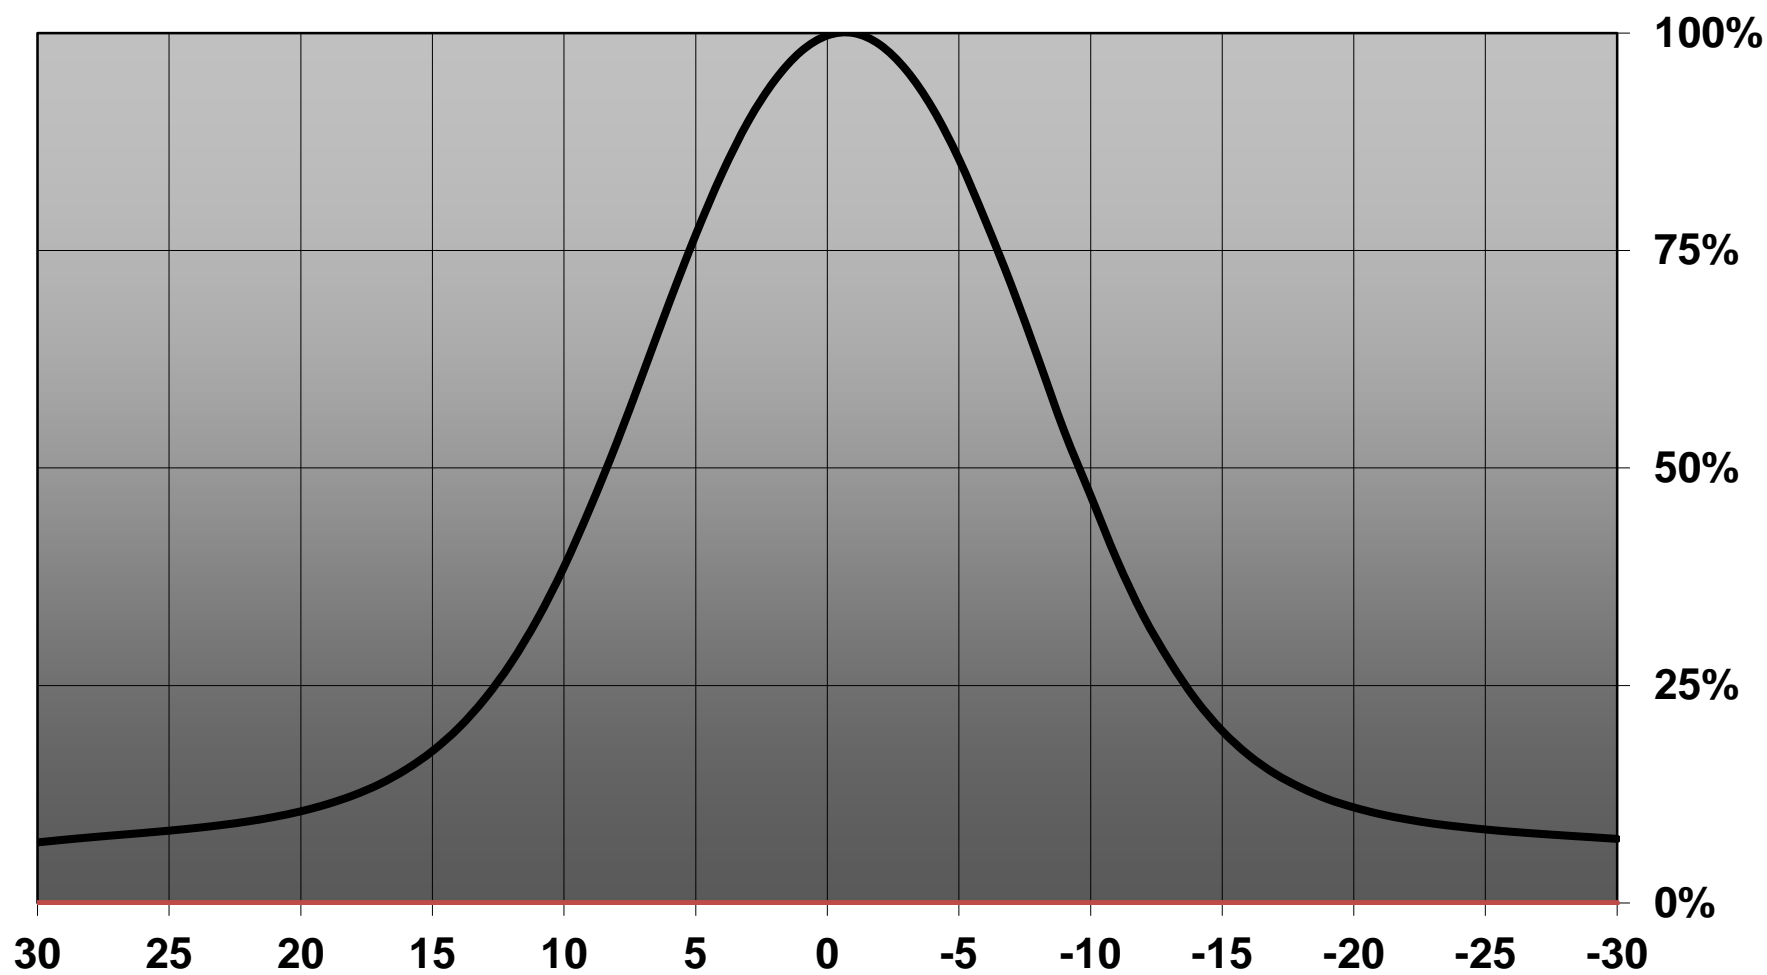


Relative intensity of CN13130_MIRELLA-50-S-DL-PF_(Duris_S10)

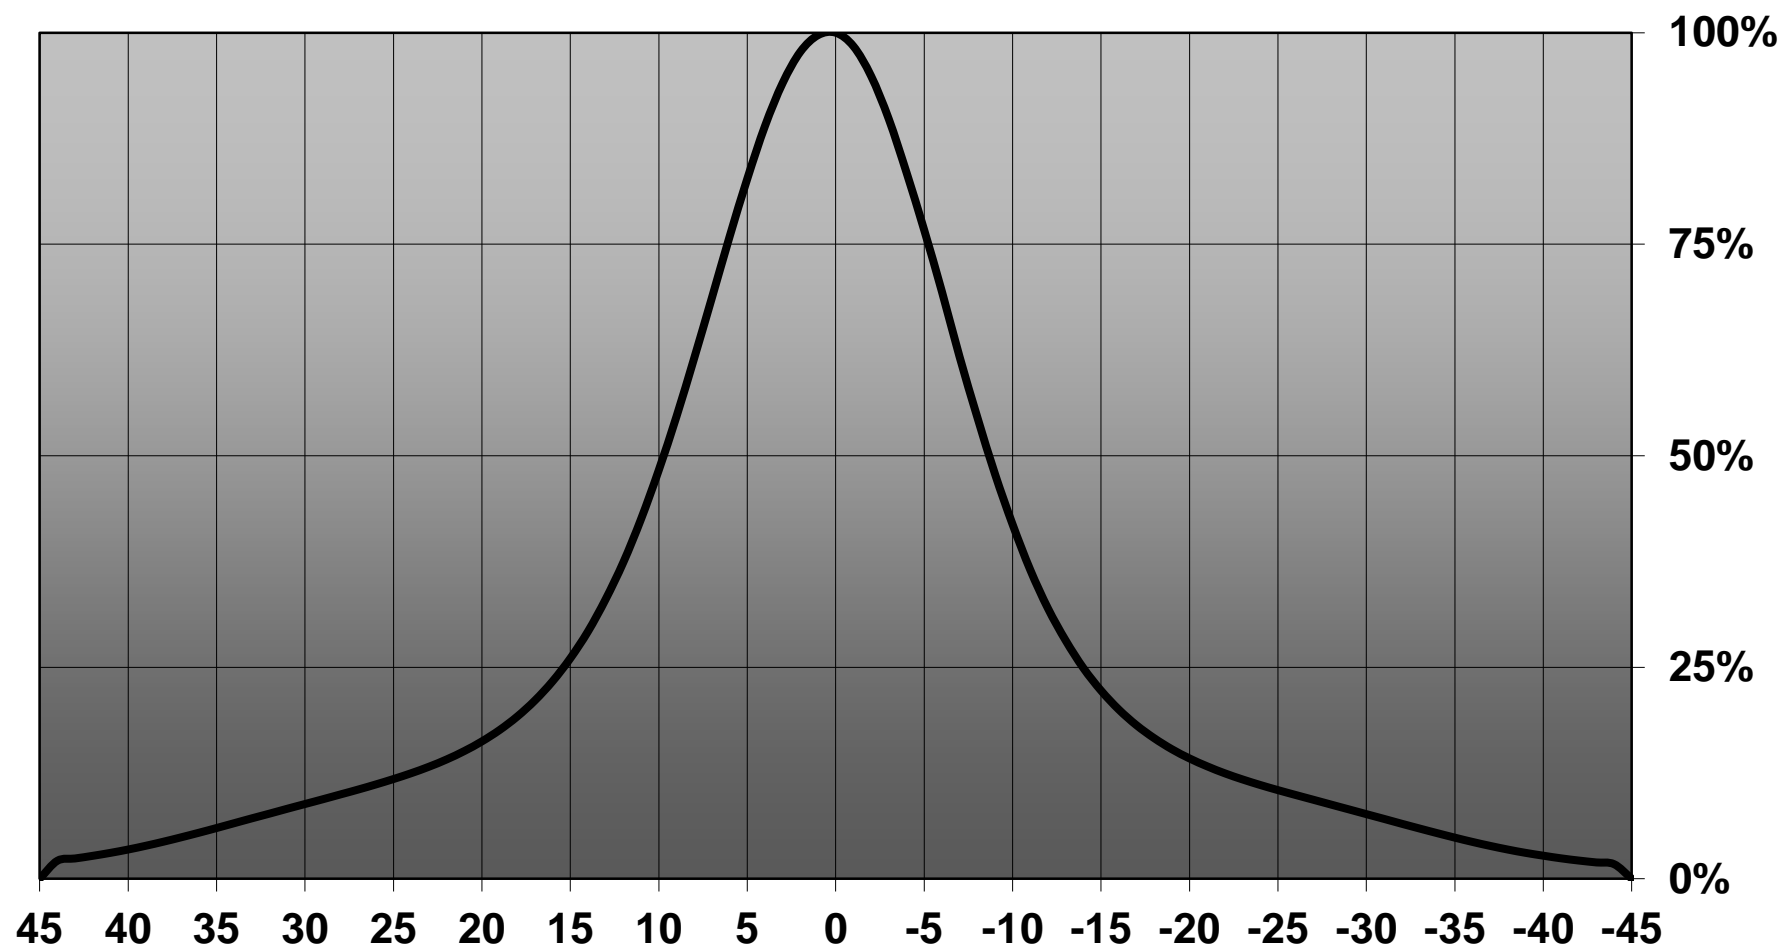

Relative intensity of CN13130_MIRELLA-50-S-DL-PF-(MTG)






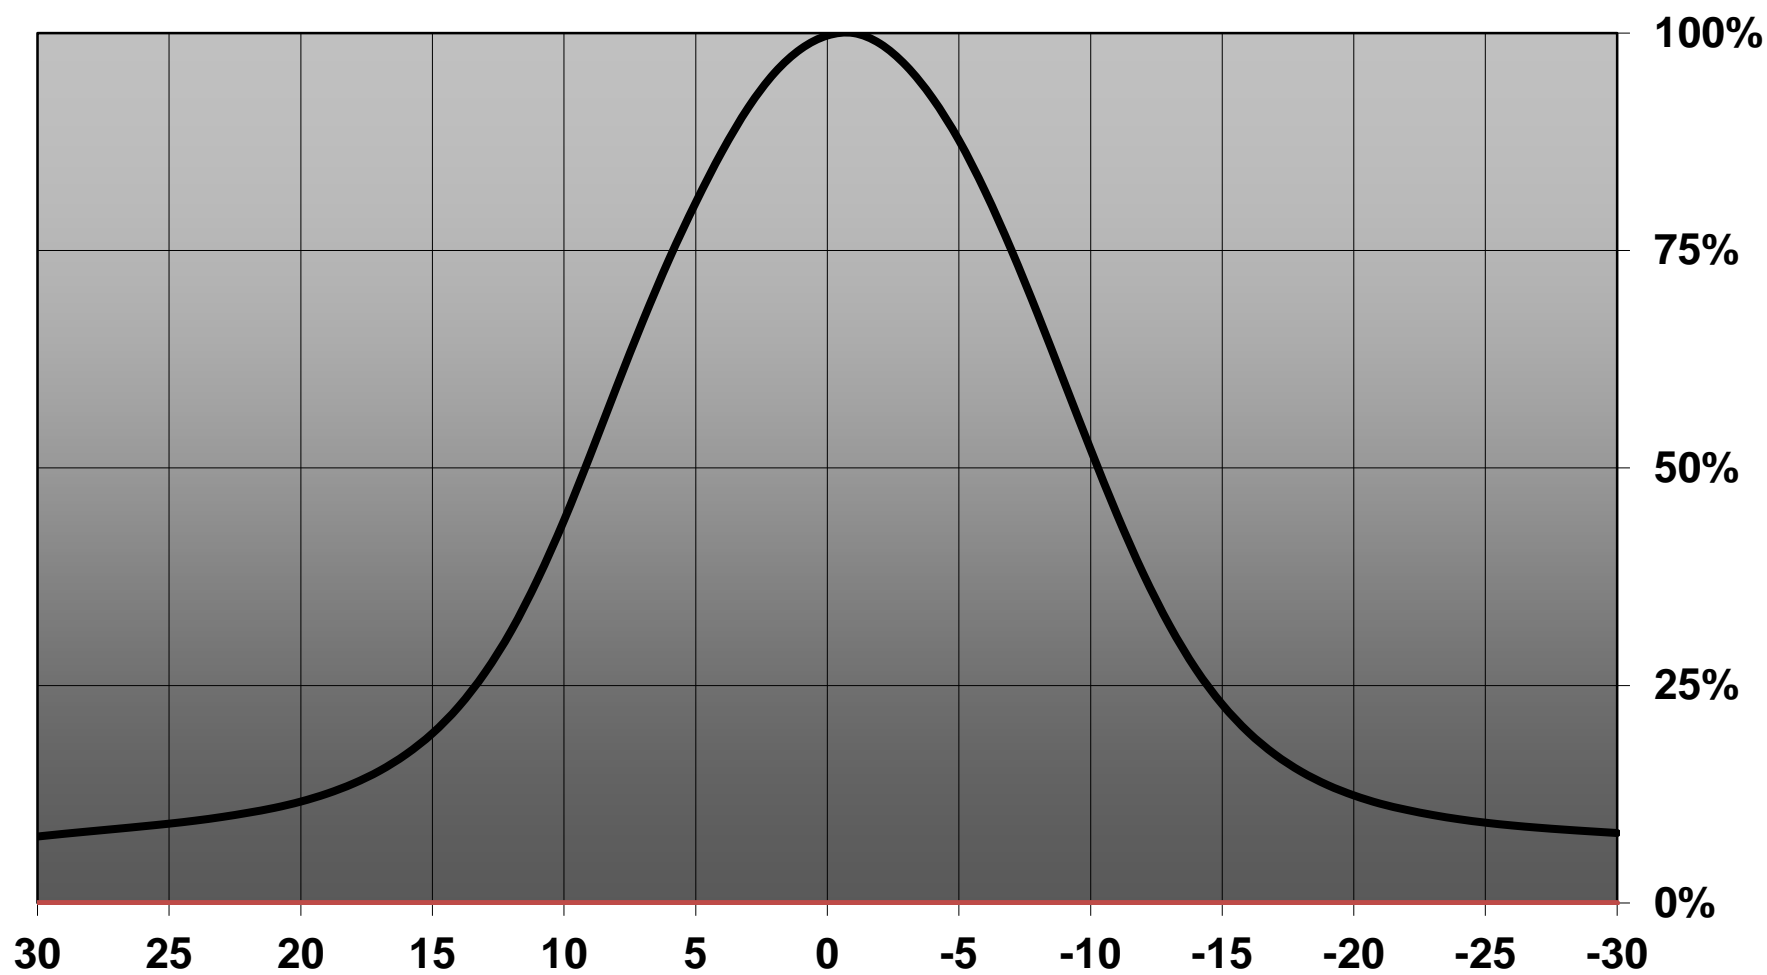


Relative intensity of CN13130_MIRELLA-50-S-DL-PF-(CLL020)

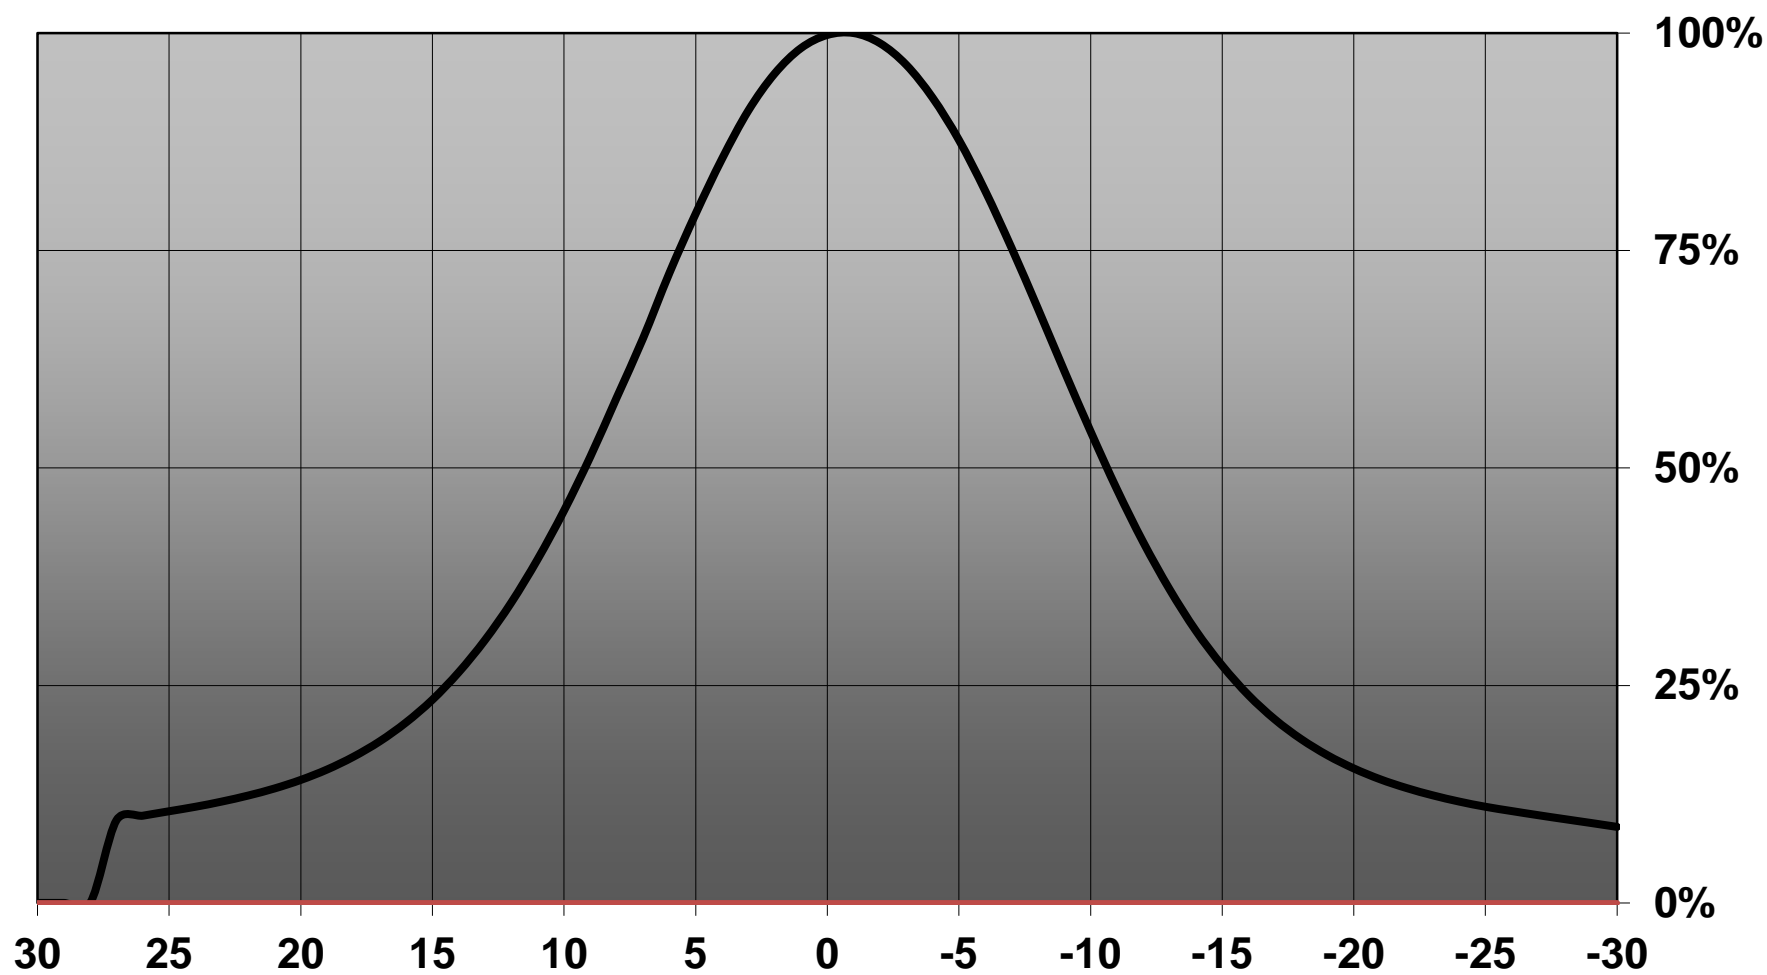

4

4

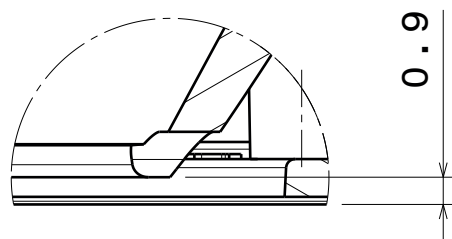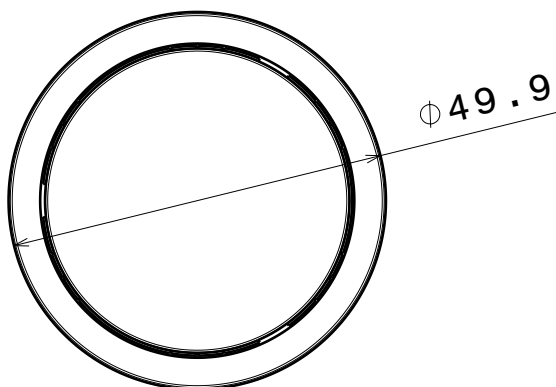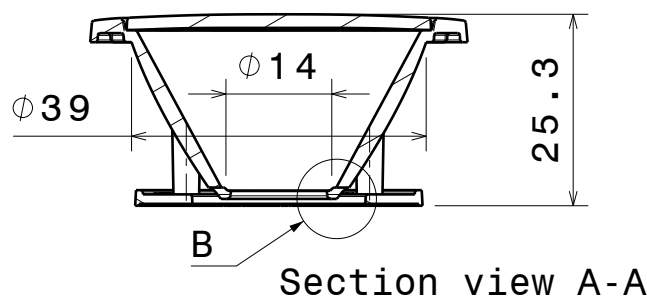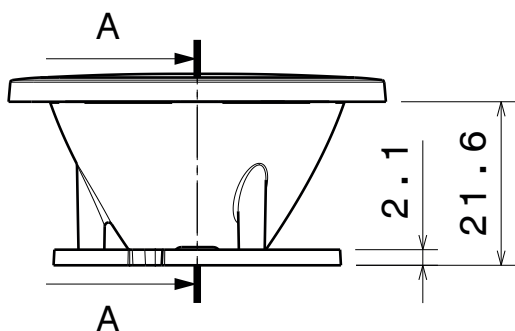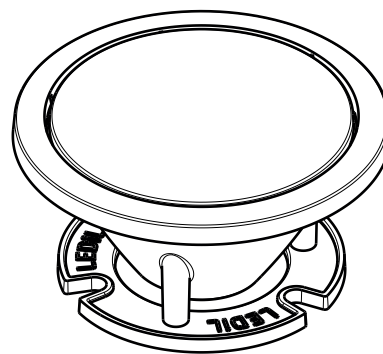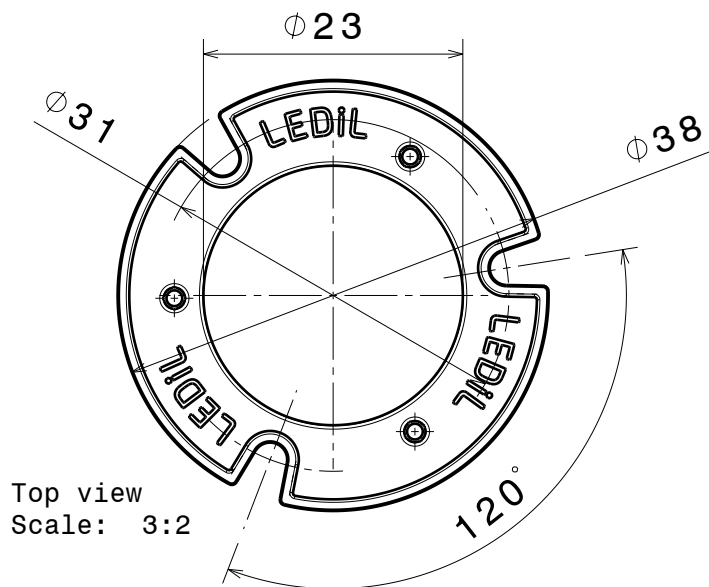

NOTE: It is recommended to use glue like DELO-PUR 9895 for pin fastening.
[http://www.delo.de/fileadmin/datasheet/DELO-PUR_9895_\(TIDB-GB\).pdf](http://www.delo.de/fileadmin/datasheet/DELO-PUR_9895_(TIDB-GB).pdf)

This drawing is our property.
 It can't be reproduced
 or communicated without
 our written agreement.

LEDIL

Ledil Oy
 Salorankatu 10
 FIN 24240 SALO
 Finland

DRAWING TITLE

Mechanical drawing

DRAWN BY

as

DATE

28.8.2012

MIRELLA-DL-PF

CHECKED BY

VS

DATE

28.8.2012

SIZE

A4

REV

001

DESIGNED BY

as

DATE

SCALE

1:1

WEIGHT

-

SHEET


1/1

D


A

1


Luminaire: Ledil Oy CN13130_MIRELLA-50-S-DL-PF_(Duris_S8)_SIMULATED
Lamps: 1 x Osram Duris S8

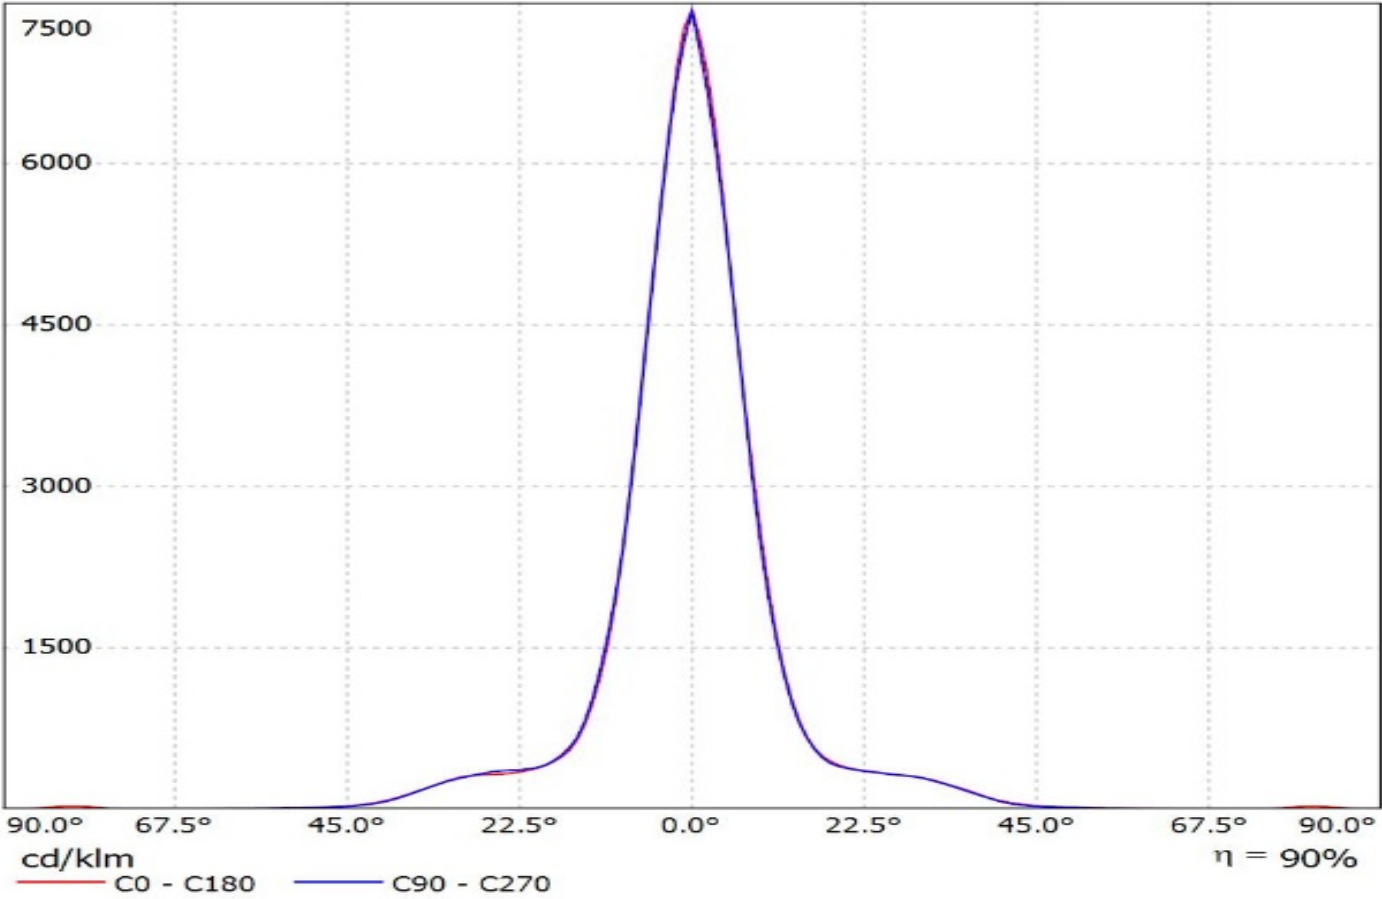


Luminaire: Ledil Oy CN13130_MIRELLA-50-S-DL-PF_(Soleriq_S9)_SIMULATED
Lamps: 1 x Osram Soleriq S9 (GW KAJFB3.EM)

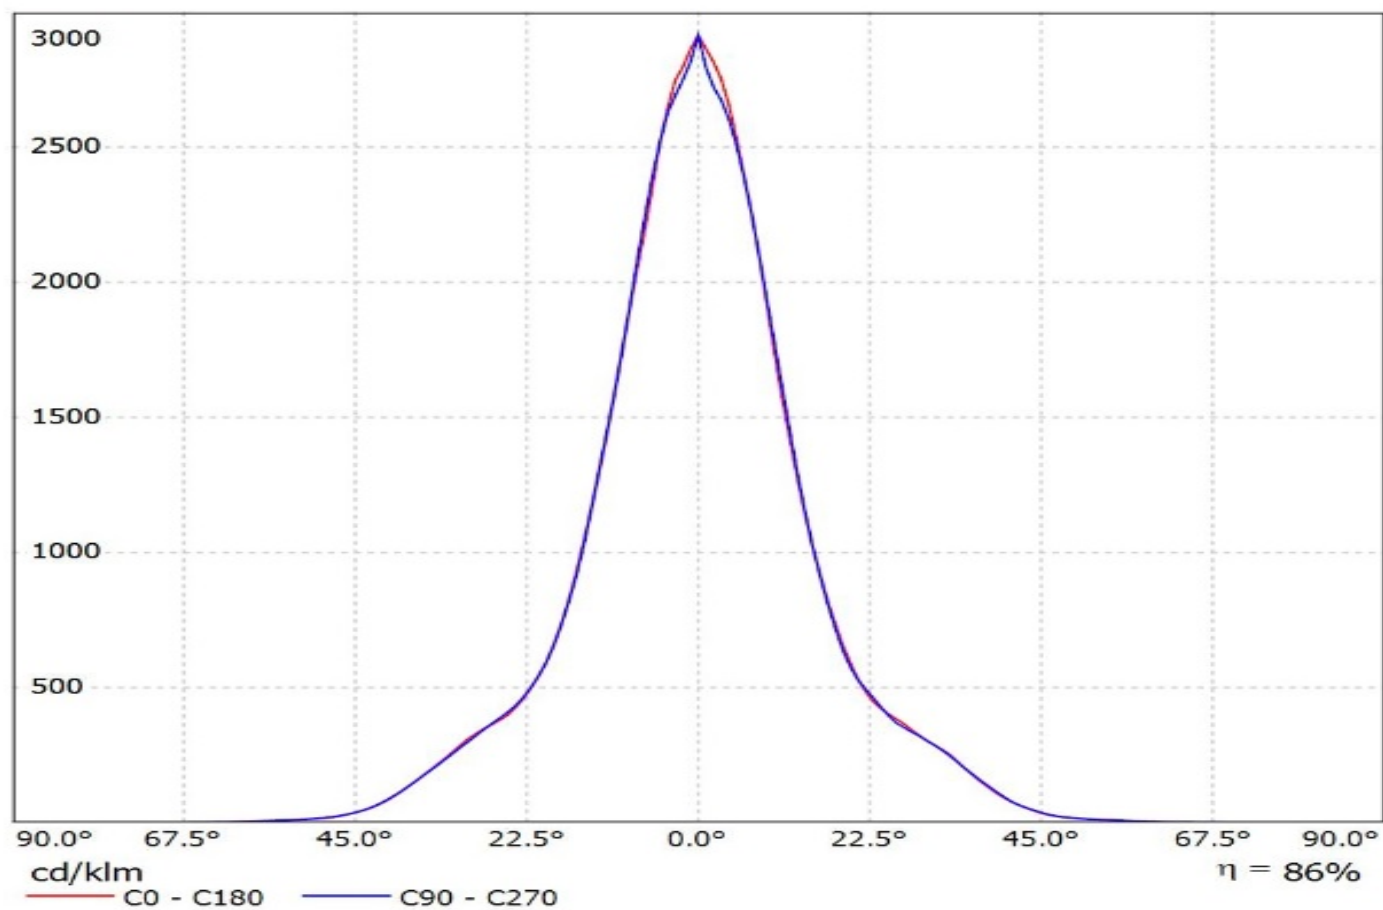


Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(MK-R) Eff.82%
Lamps: 1 x CREE_MK-R_358.348lm@250mA_P=2.84311W_I=249.9mA

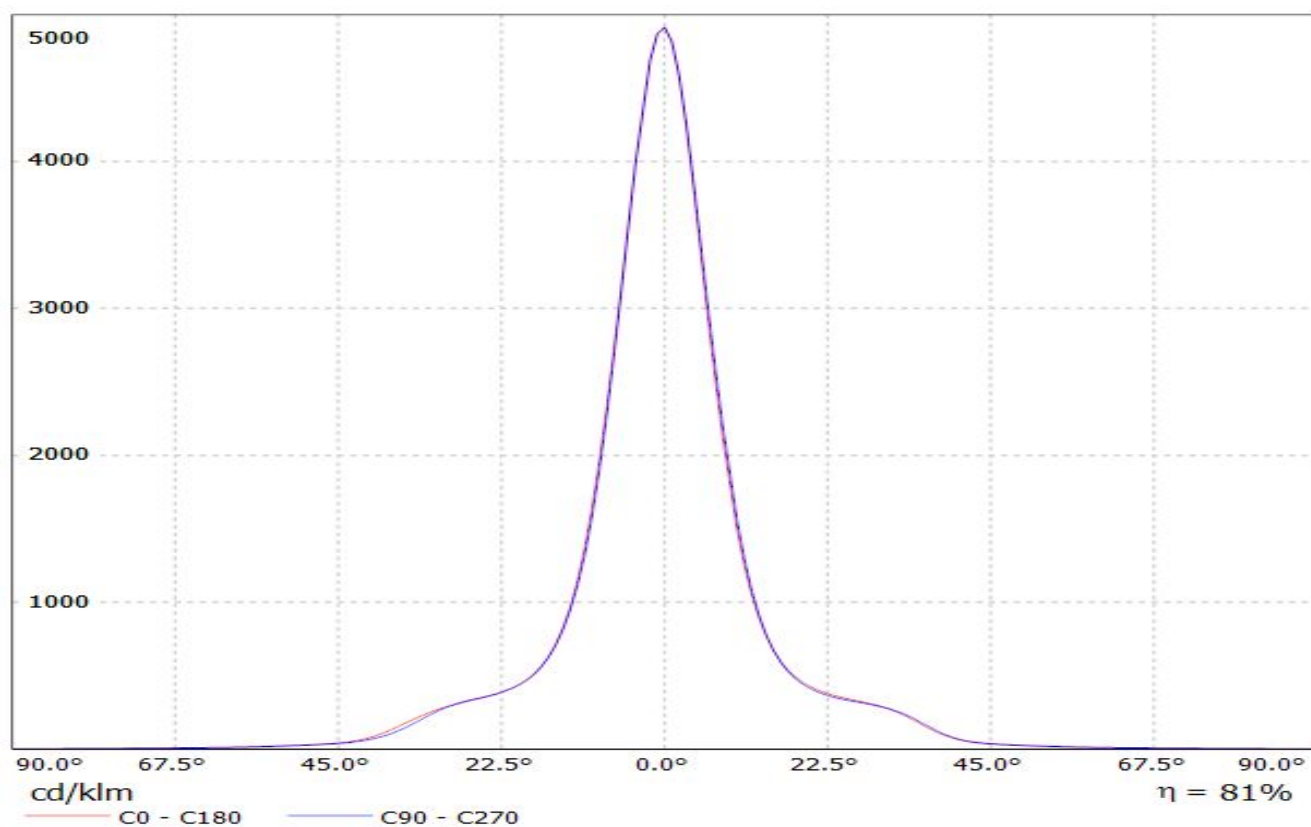


Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(CREE_XHP50_WARM_WHITE)
Lamps: 1 x CREE_XHP50_WARM_WHITE_194.142lm@250mA_P=1.39939W_I=0.2499A

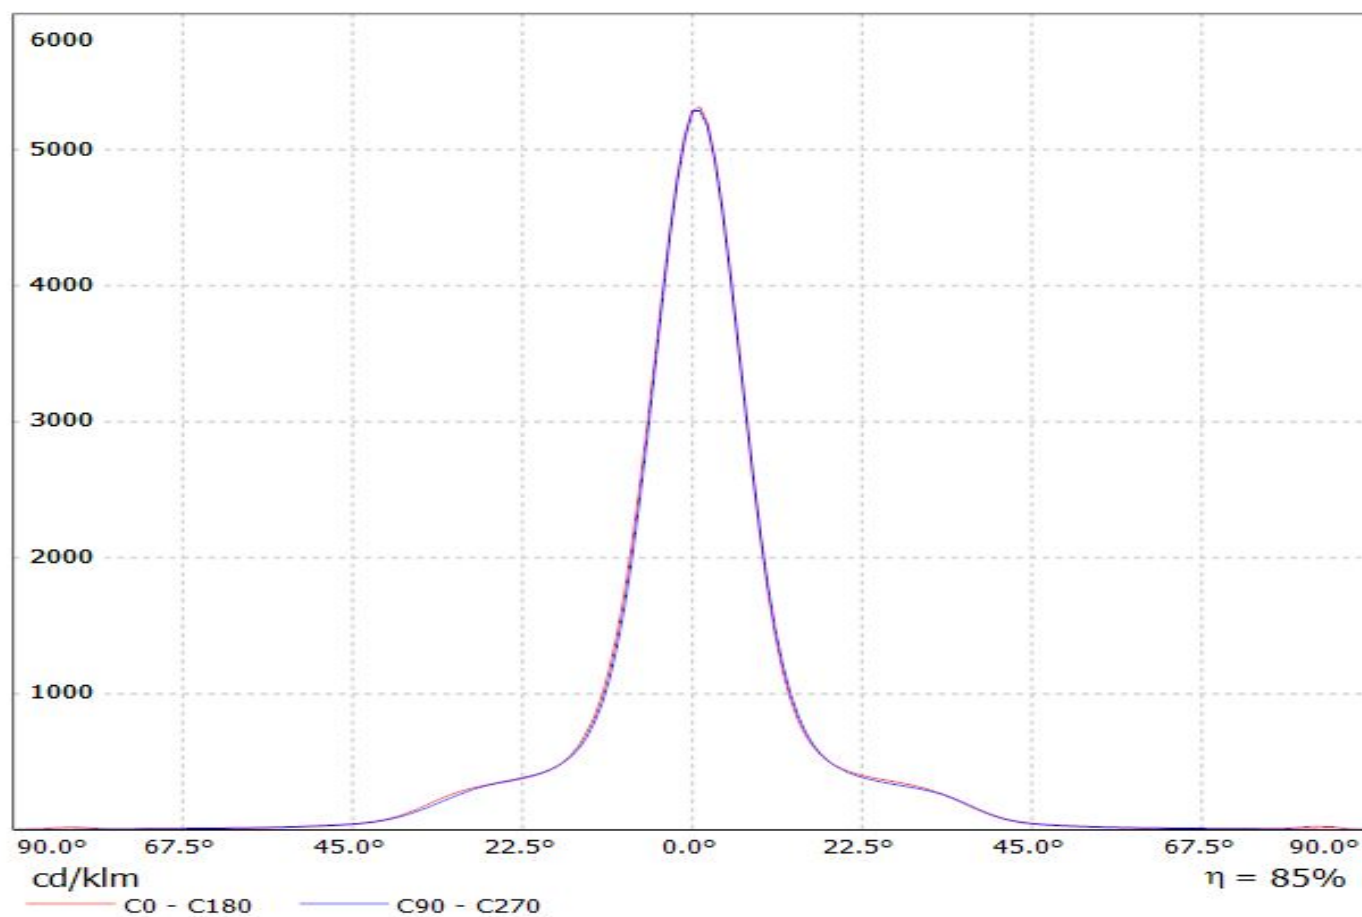


Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(CREE_XHP70)
Lamps: 1 x CREE_XHP70_260.212lm@250mA_P=1.383W_I=0.2499A

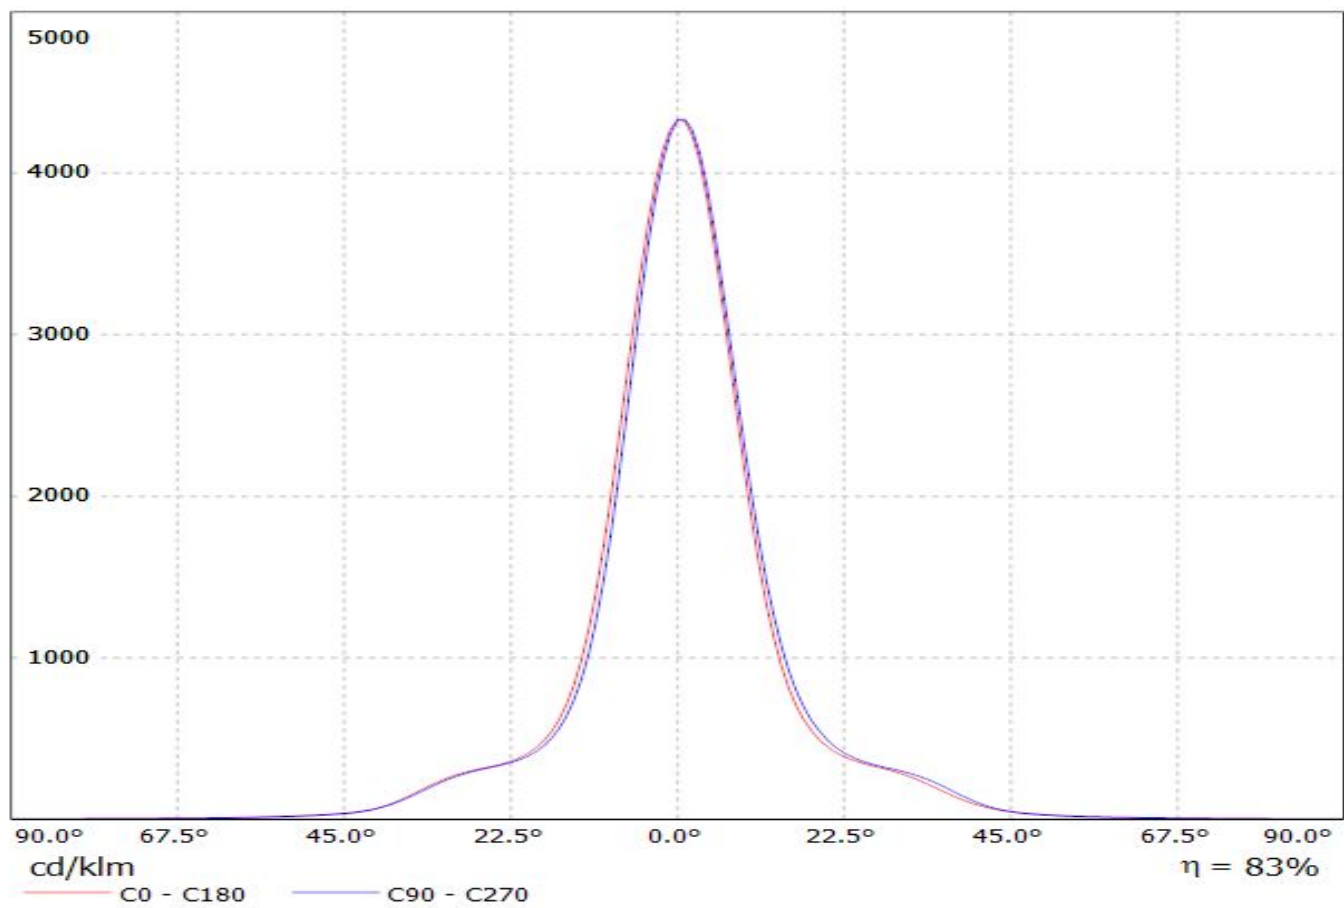

Luminaire: Ledil CN13130_MIRELLA-50-S-DL-PF_(MHD-G)
Lamps: 1 x Cree MHD-G_530.44lm@100mA_P=3.0W_I=0.100A

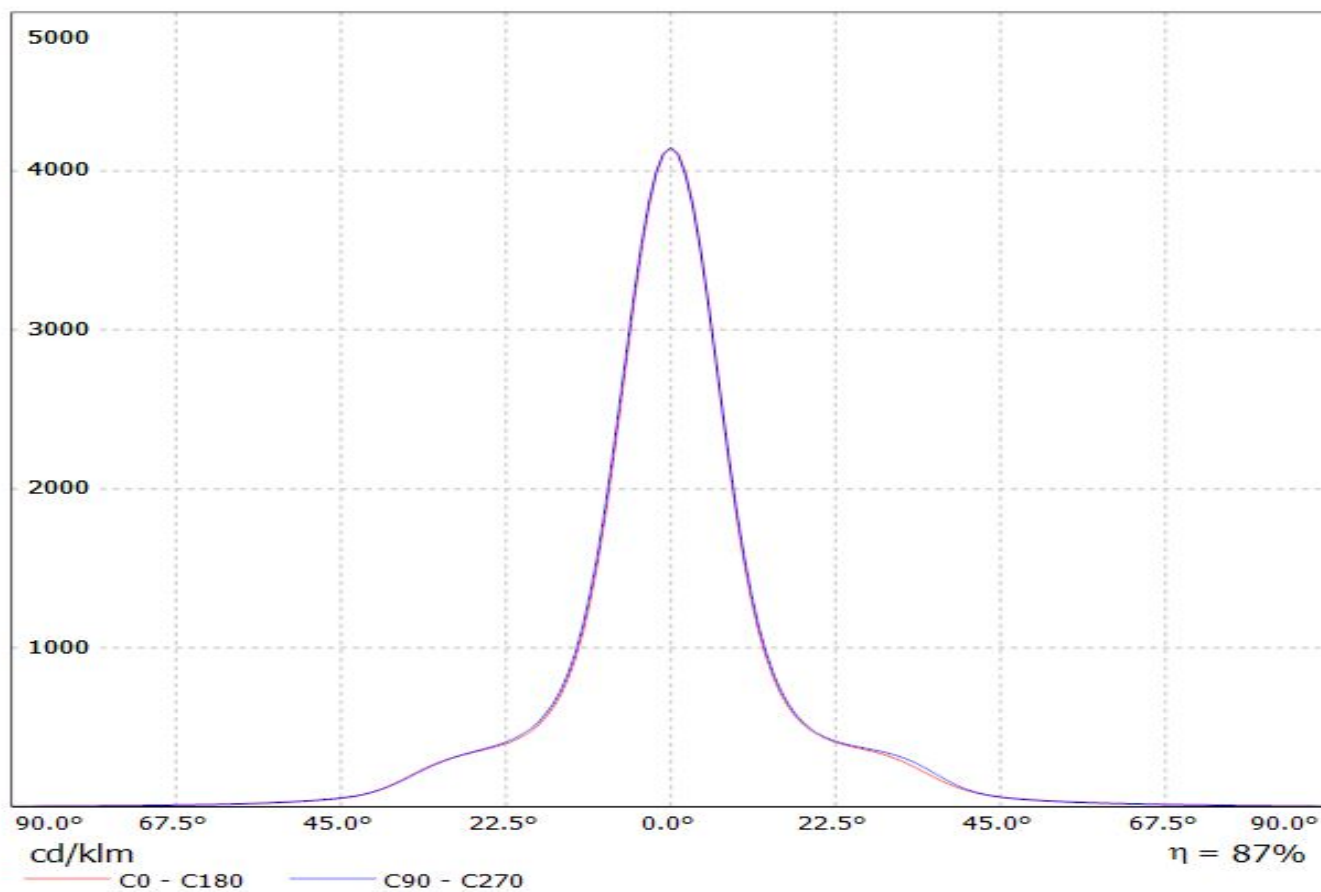


Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(CLU700)
Lamps: 1 x Citizen_CLU700_C13083_PF-SOCKET_394.785lm@100mA_P=2.92999W_I=0.1044A

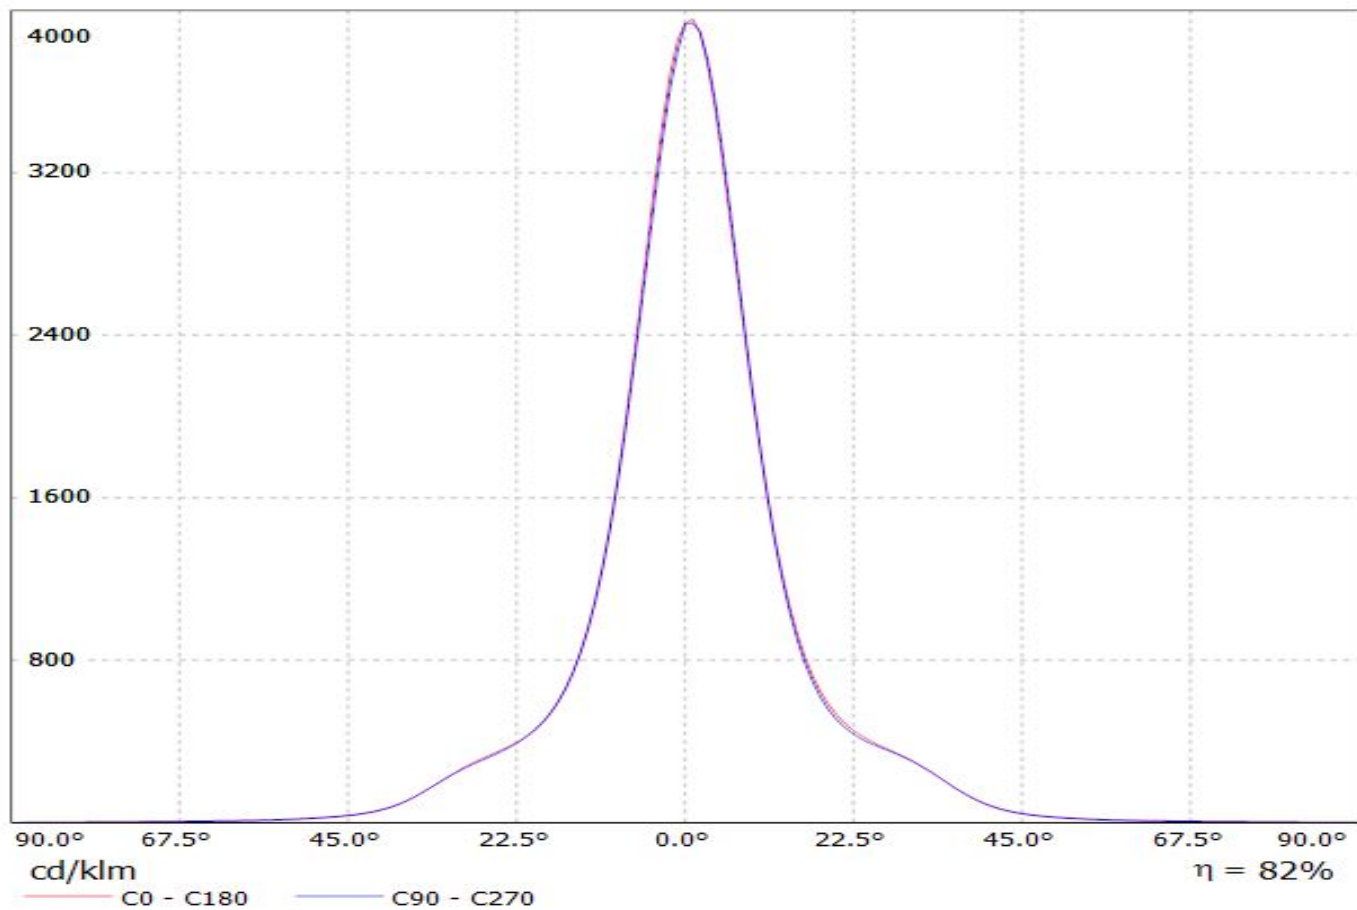


**LEDiL Oy CN12483_MIRELLA-50-S-DL_(Mini_Zenigata) Eff.84.2% / LDC
(Linear)**


Luminaire: LEDiL Oy CN12483_MIRELLA-50-S-DL_(Mini_Zenigata) Eff.84.2%
Lamps: 1 x Mini_Zenigata (803.772lm@250mA)

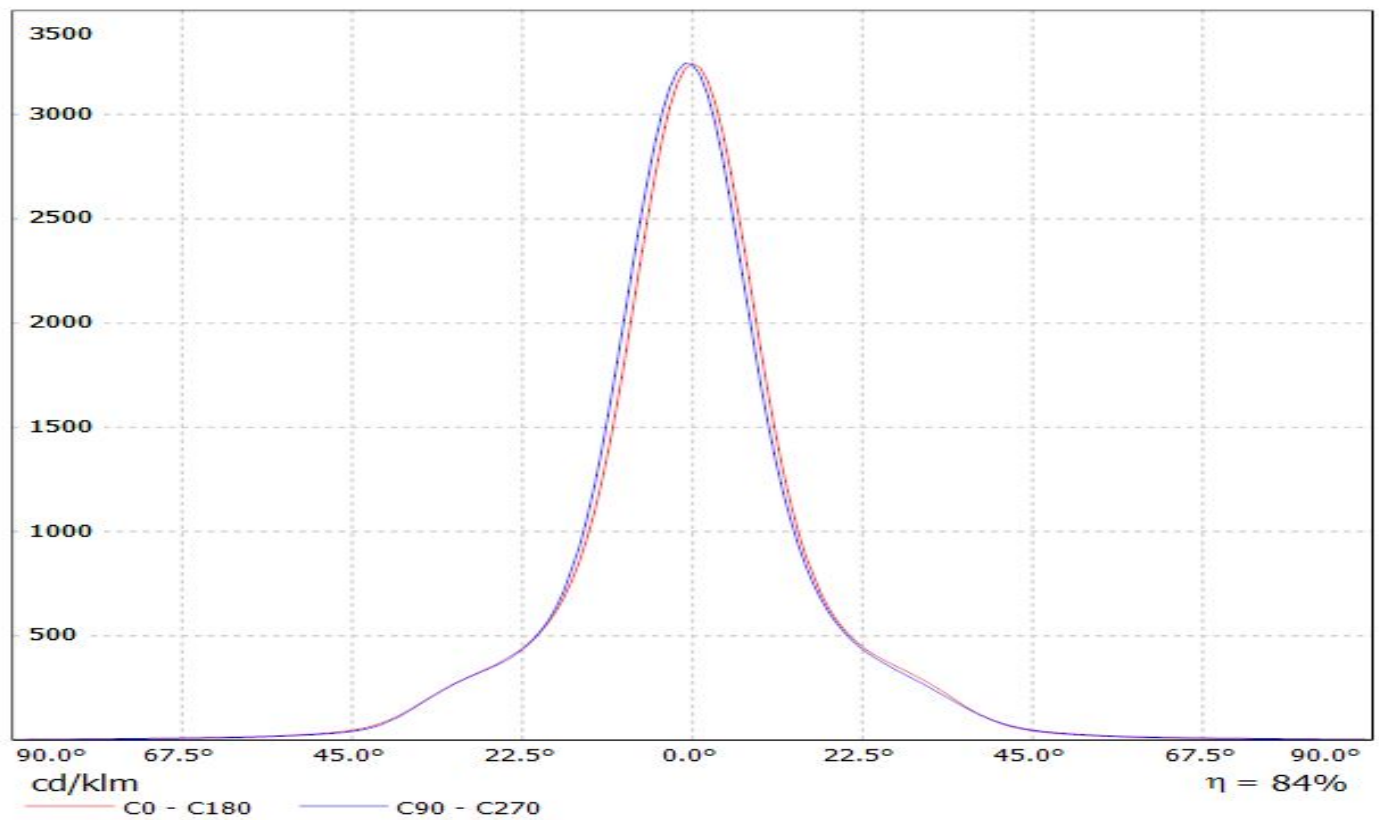


Luminaire: LEDil Oy CN13130_MIRELLA-50-S-DL-PF_(ZC6) Efficiency=83%
Lamps: 1 x Seoul ZC6 (SDW81F1C) 422lm @ 100mA CCT=3100K P=3.4W I=100mA

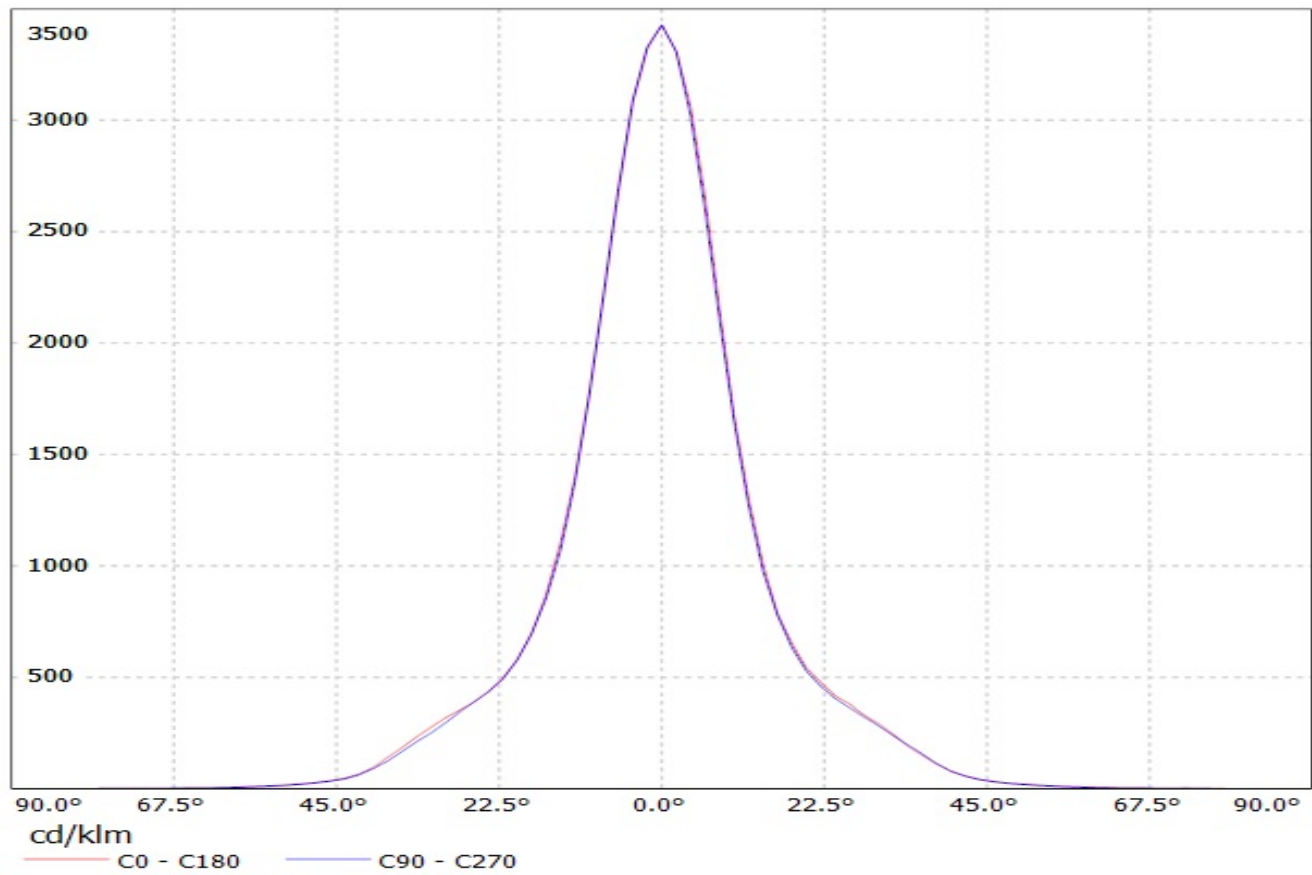


Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(CXM-9)
Lamps: 1 x Luminus_XNOVA_CXM-9_(AA00)_974.297lm@240mA_P=8.2836W_I=240mA

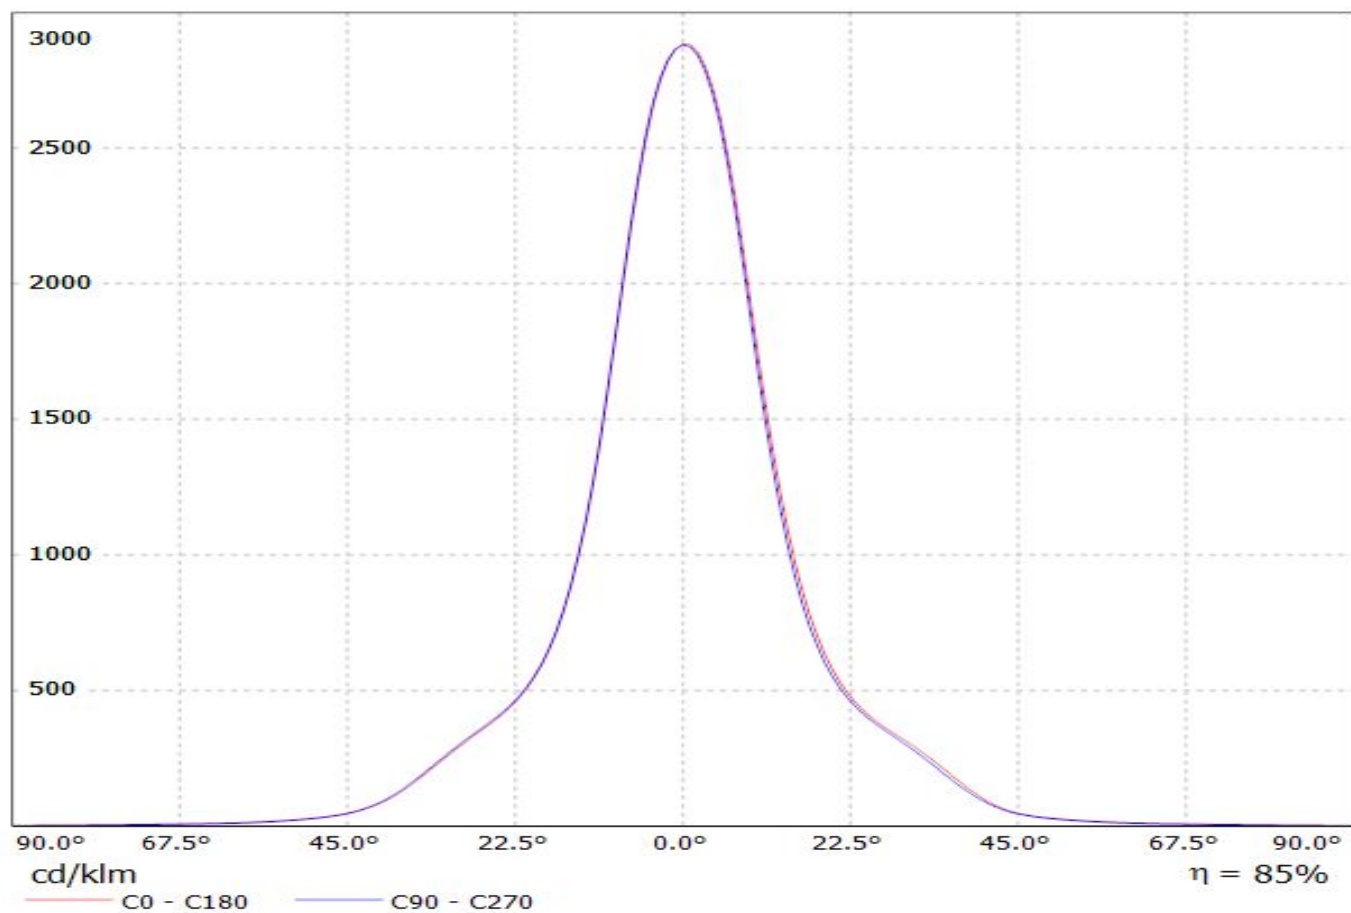


Luminaire: Ledil Oy CN13130_MIRELLA-50-S-DL-PF_(Duris_S8)_SIMULATED
Lamps: 1 x Osram Duris S8

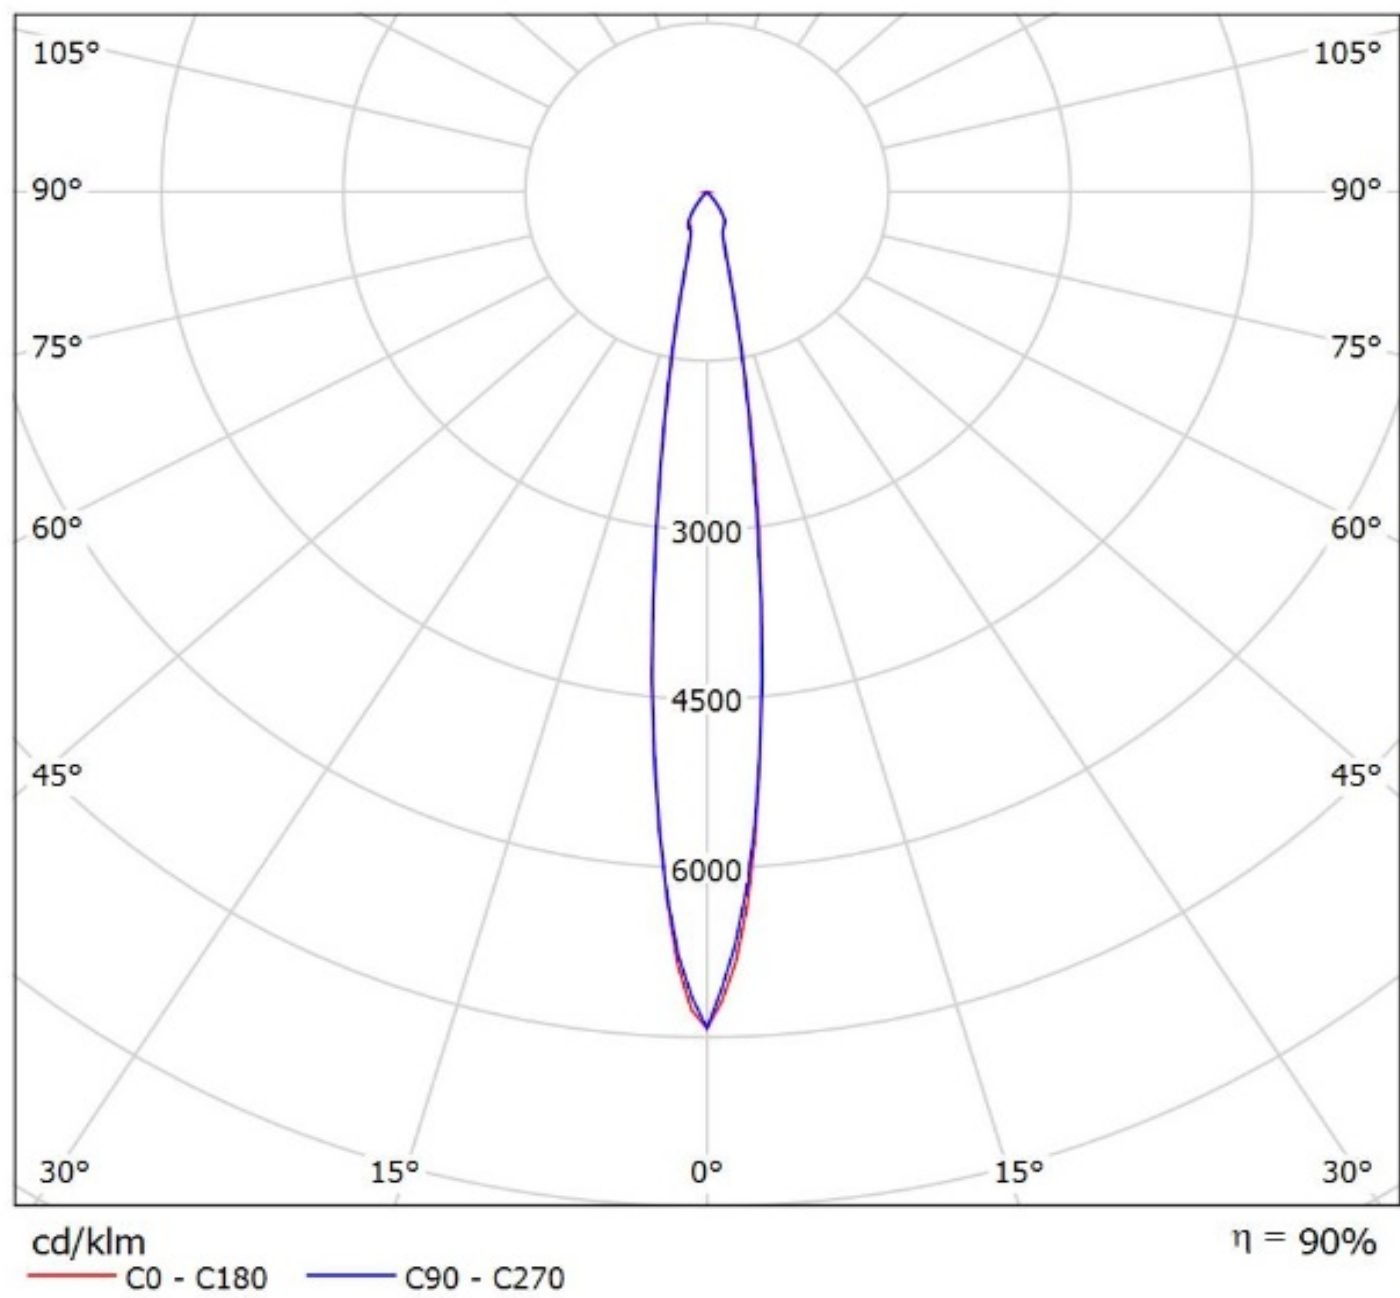


Luminaire: Ledil Oy CN13130_MIRELLA-50-S-DL-PF_(Soleriq_S9)_SIMULATED
Lamps: 1 x Osram Soleriq S9 (GW KAJFB3.EM)

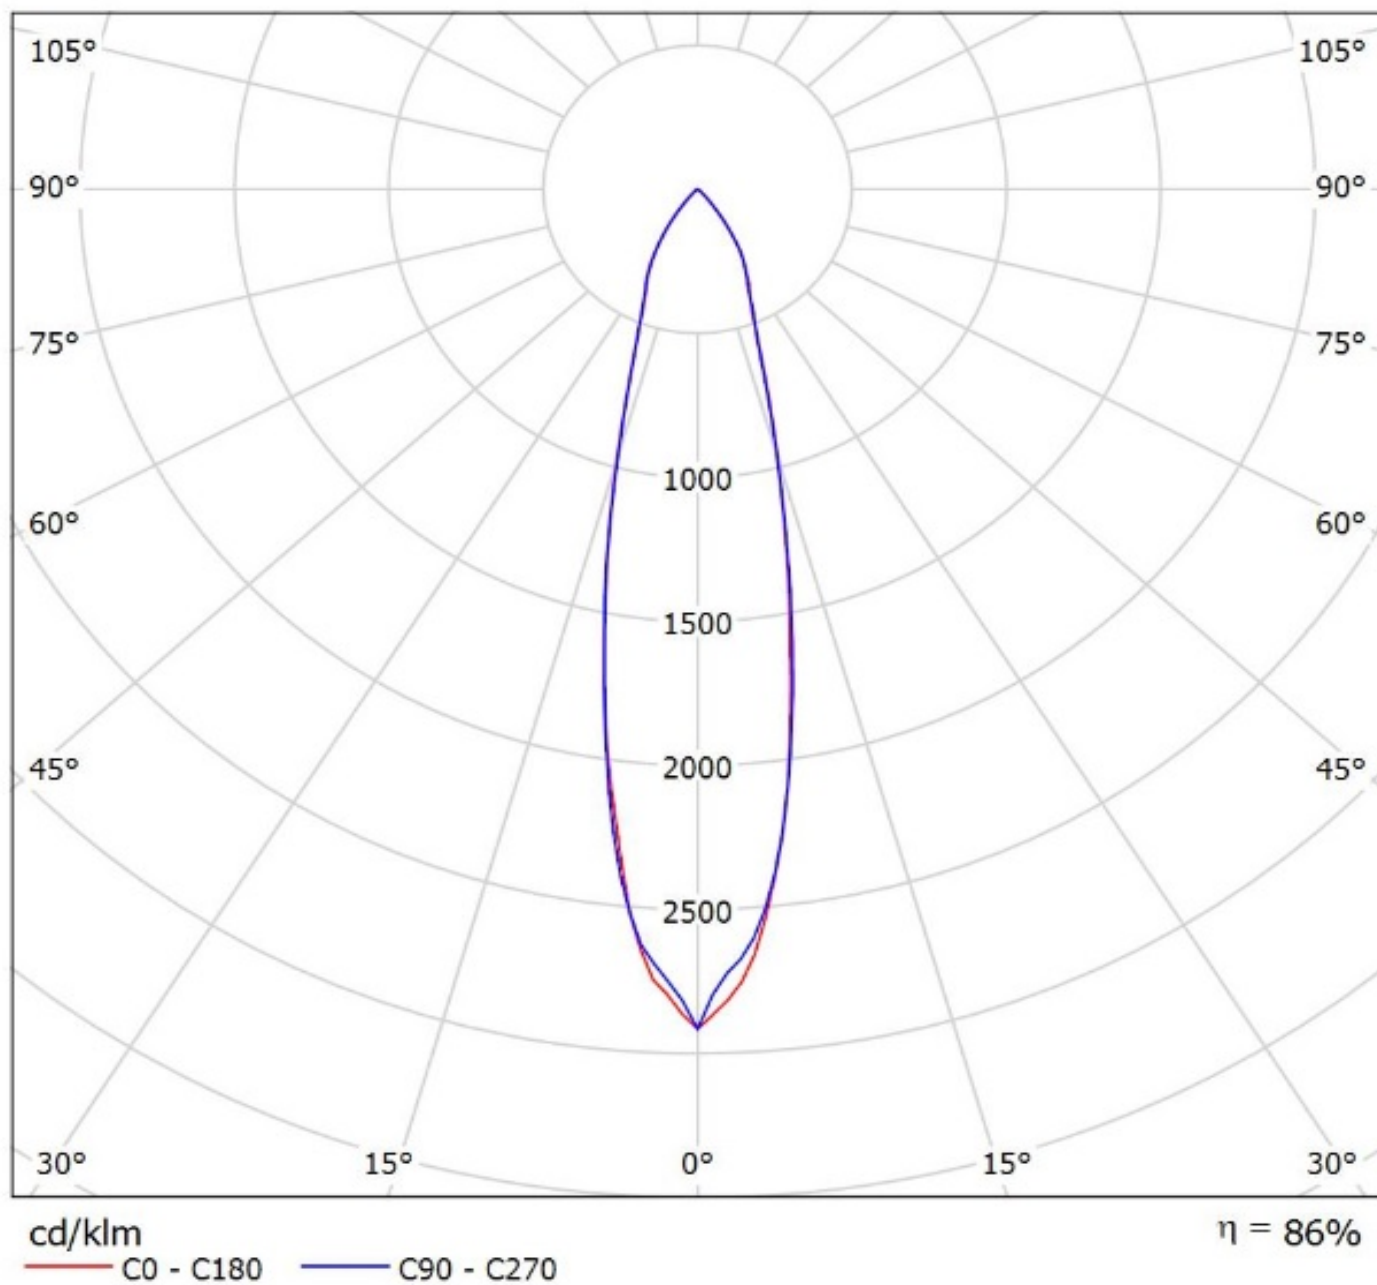


Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(MK-R) Eff.82%
Lamps: 1 x CREE_MK-R_358.348lm@250mA_P=2.84311W_I=249.9mA

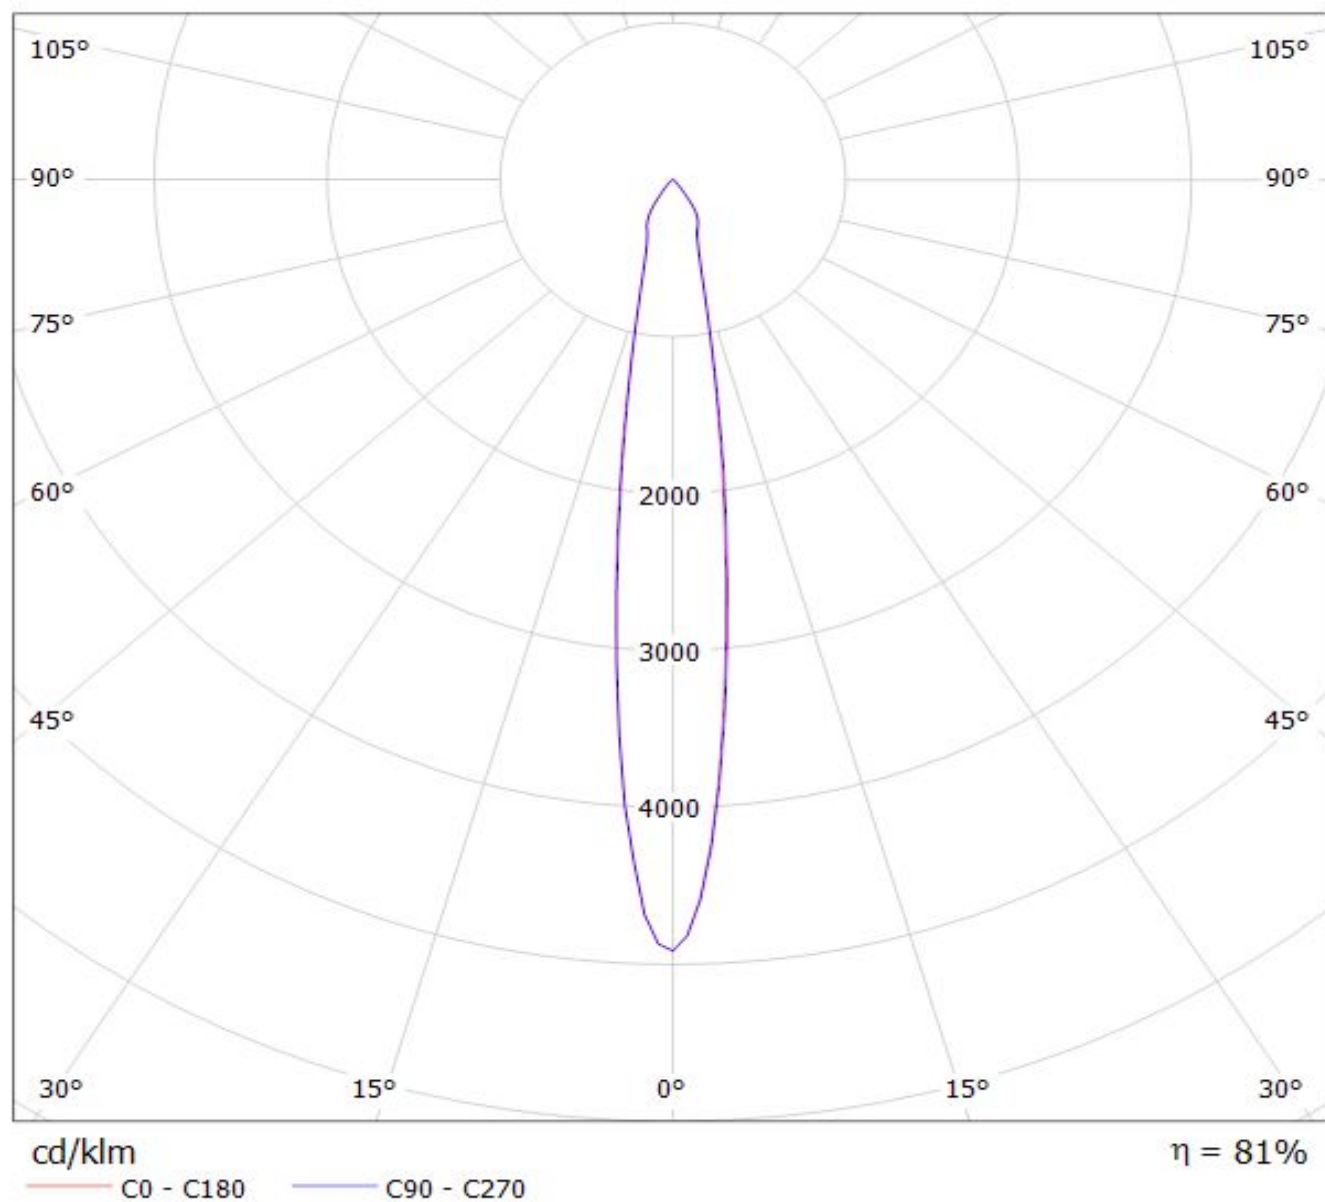


Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(CREE_XHP50_WARM_WHITE)
Lamps: 1 x CREE_XHP50_WARM_WHITE_194.142lm@250mA_P=1.39939W_I=0.2499A

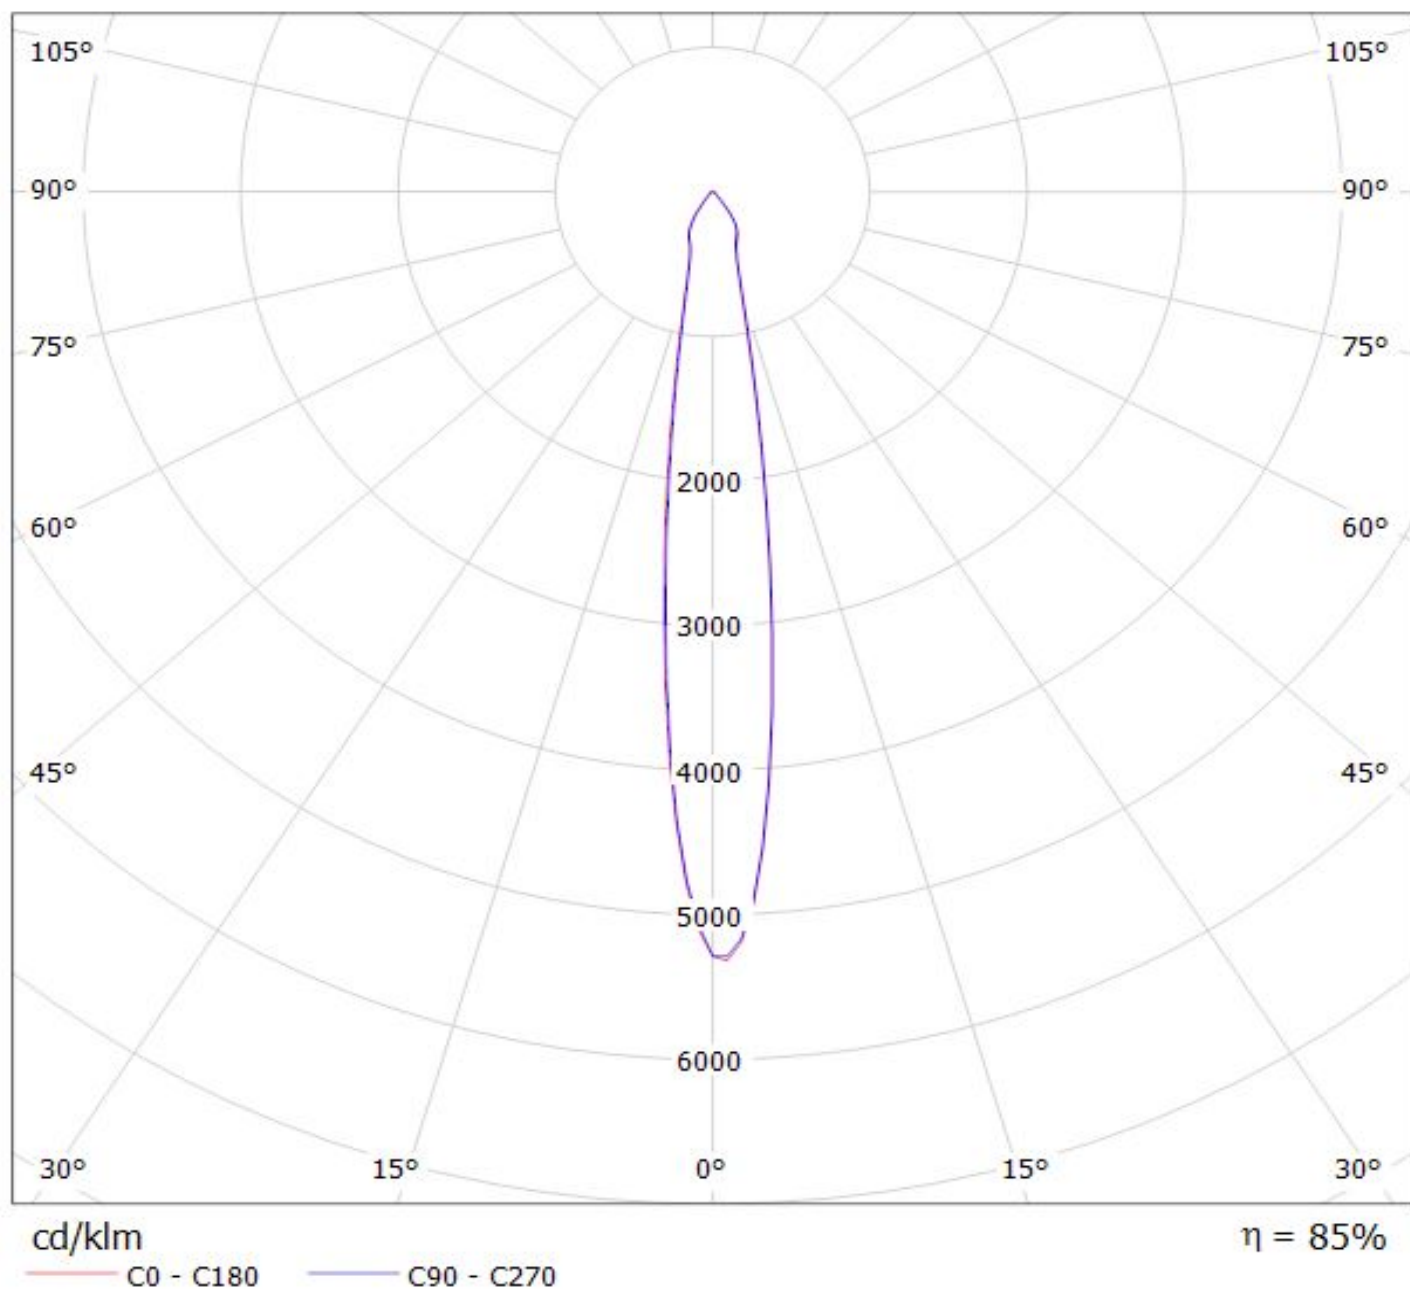

Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(CREE_XHP70)
Lamps: 1 x CREE_XHP70_260.212lm@250mA_P=1.383W_I=0.2499A

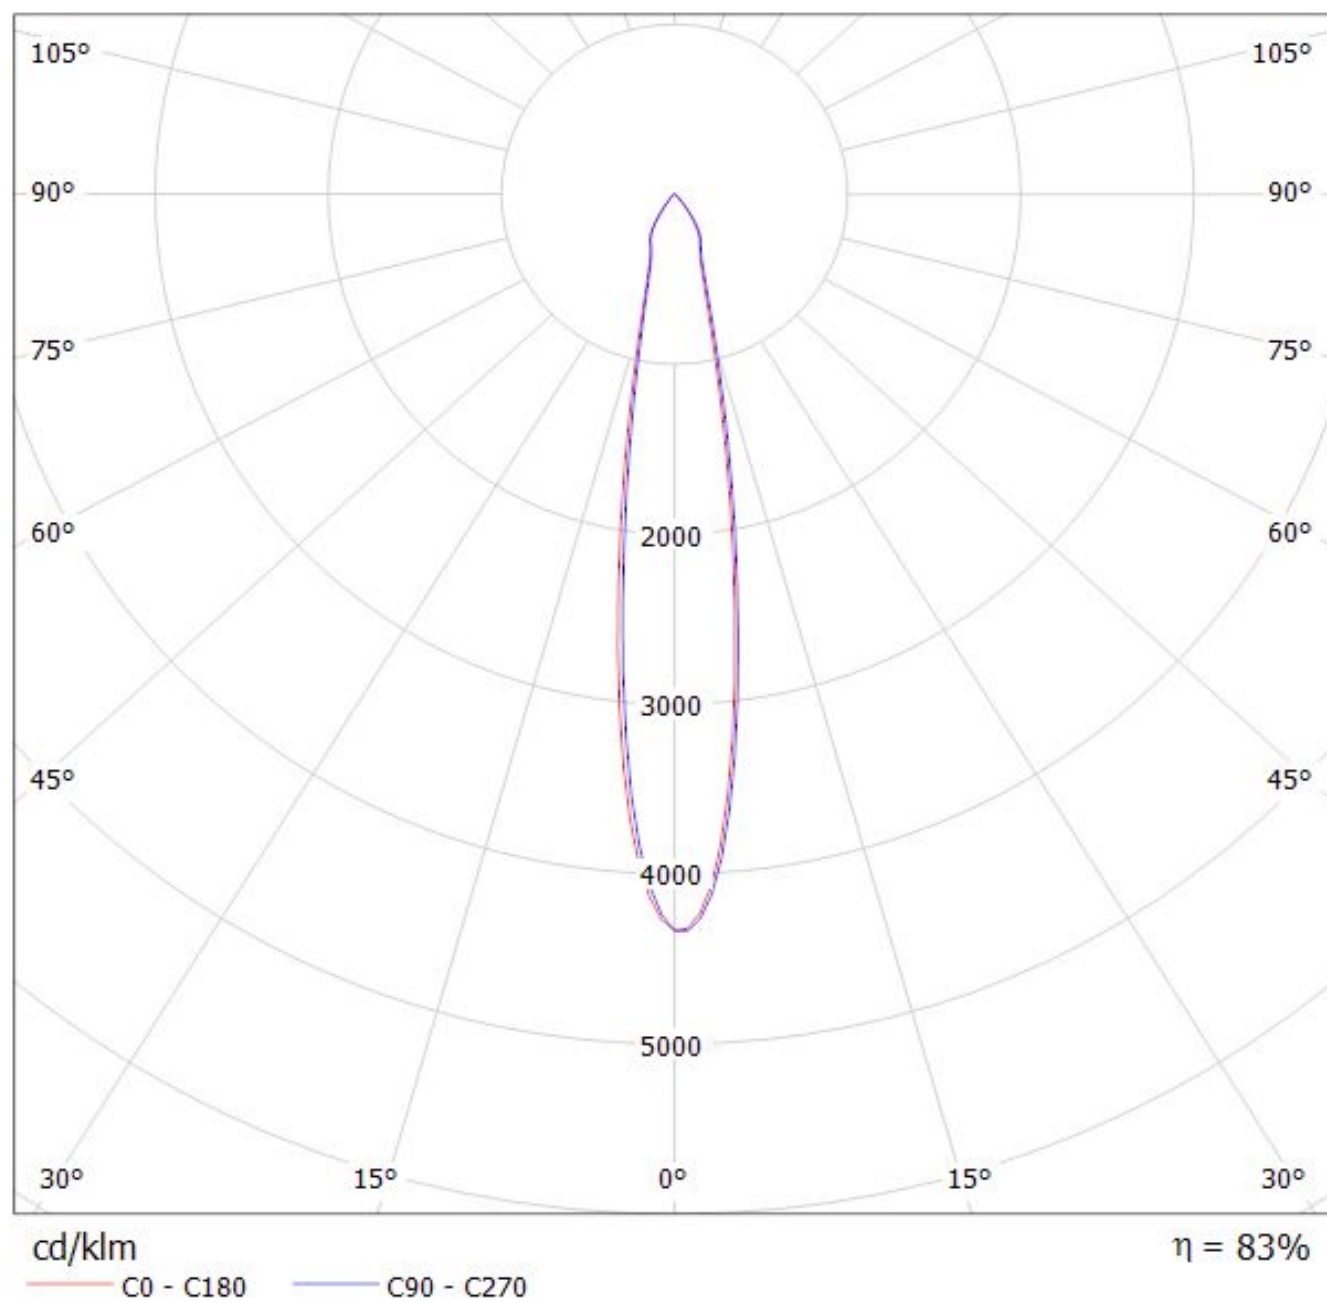


Luminaire: Ledil CN13130_MIRELLA-50-S-DL-PF_(MHD-G)
Lamps: 1 x Cree MHD-G_530.44lm@100mA_P=3.0W_I=0.100A

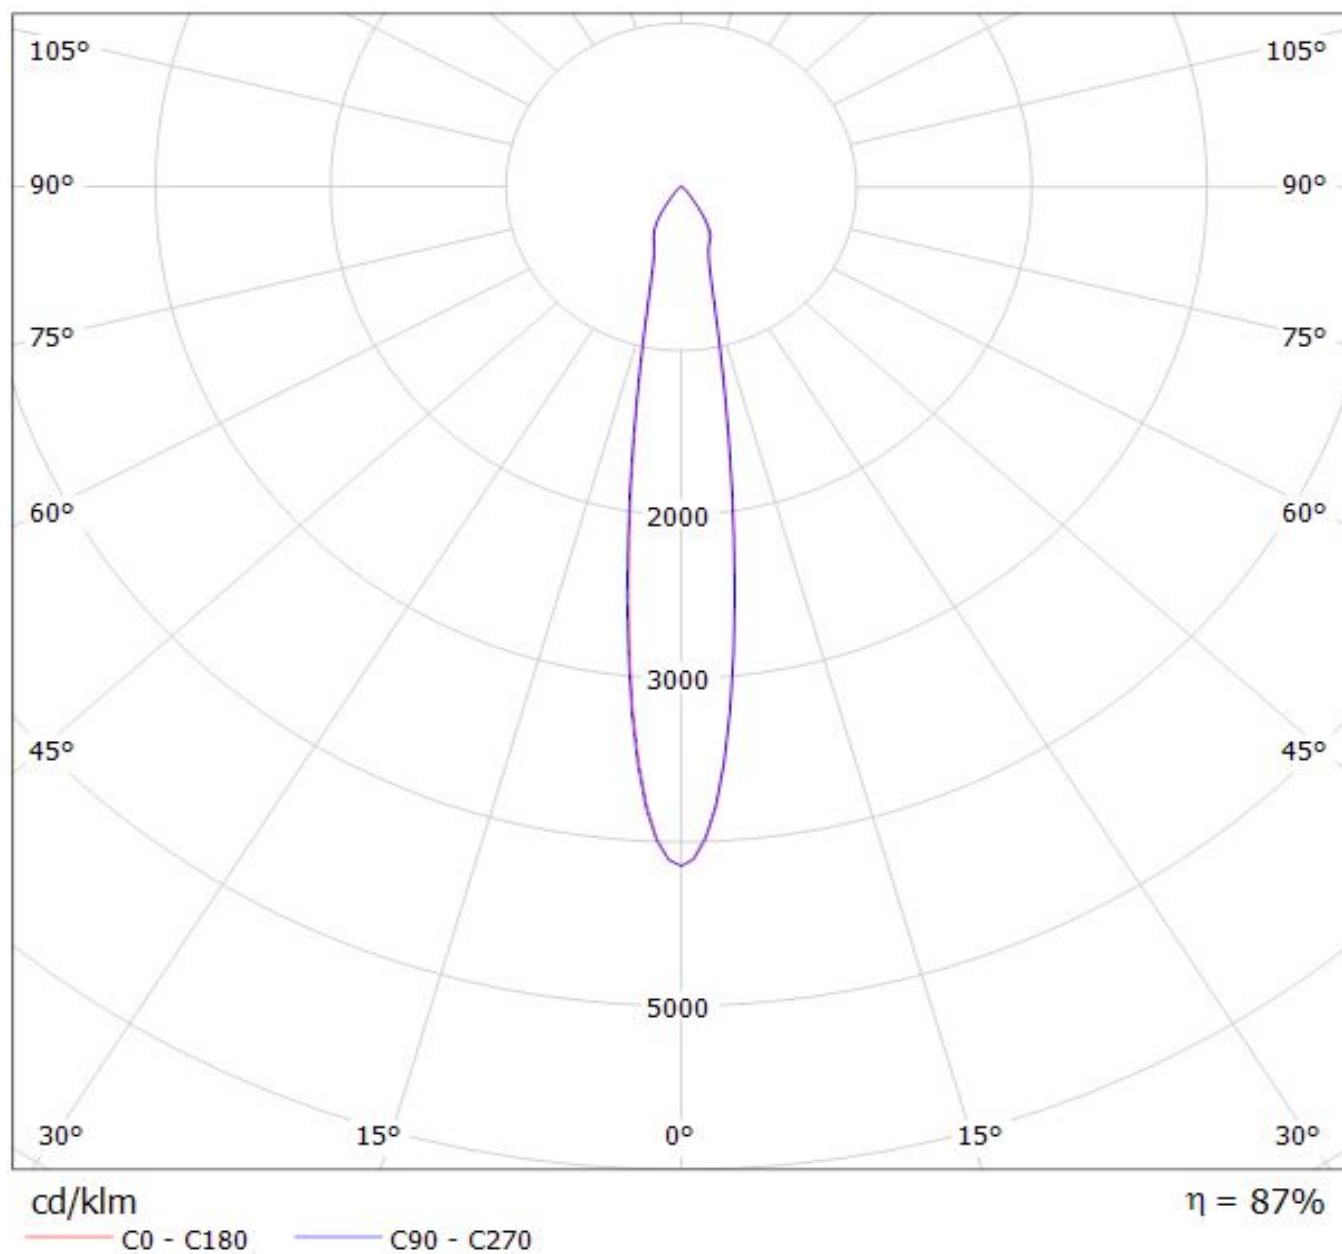


Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(CLU700)


Lamps: 1 x Citizen_CLU700_C13083_PF-SOCKET_394.785lm@100mA_P=2.92999W_I=0.1044A

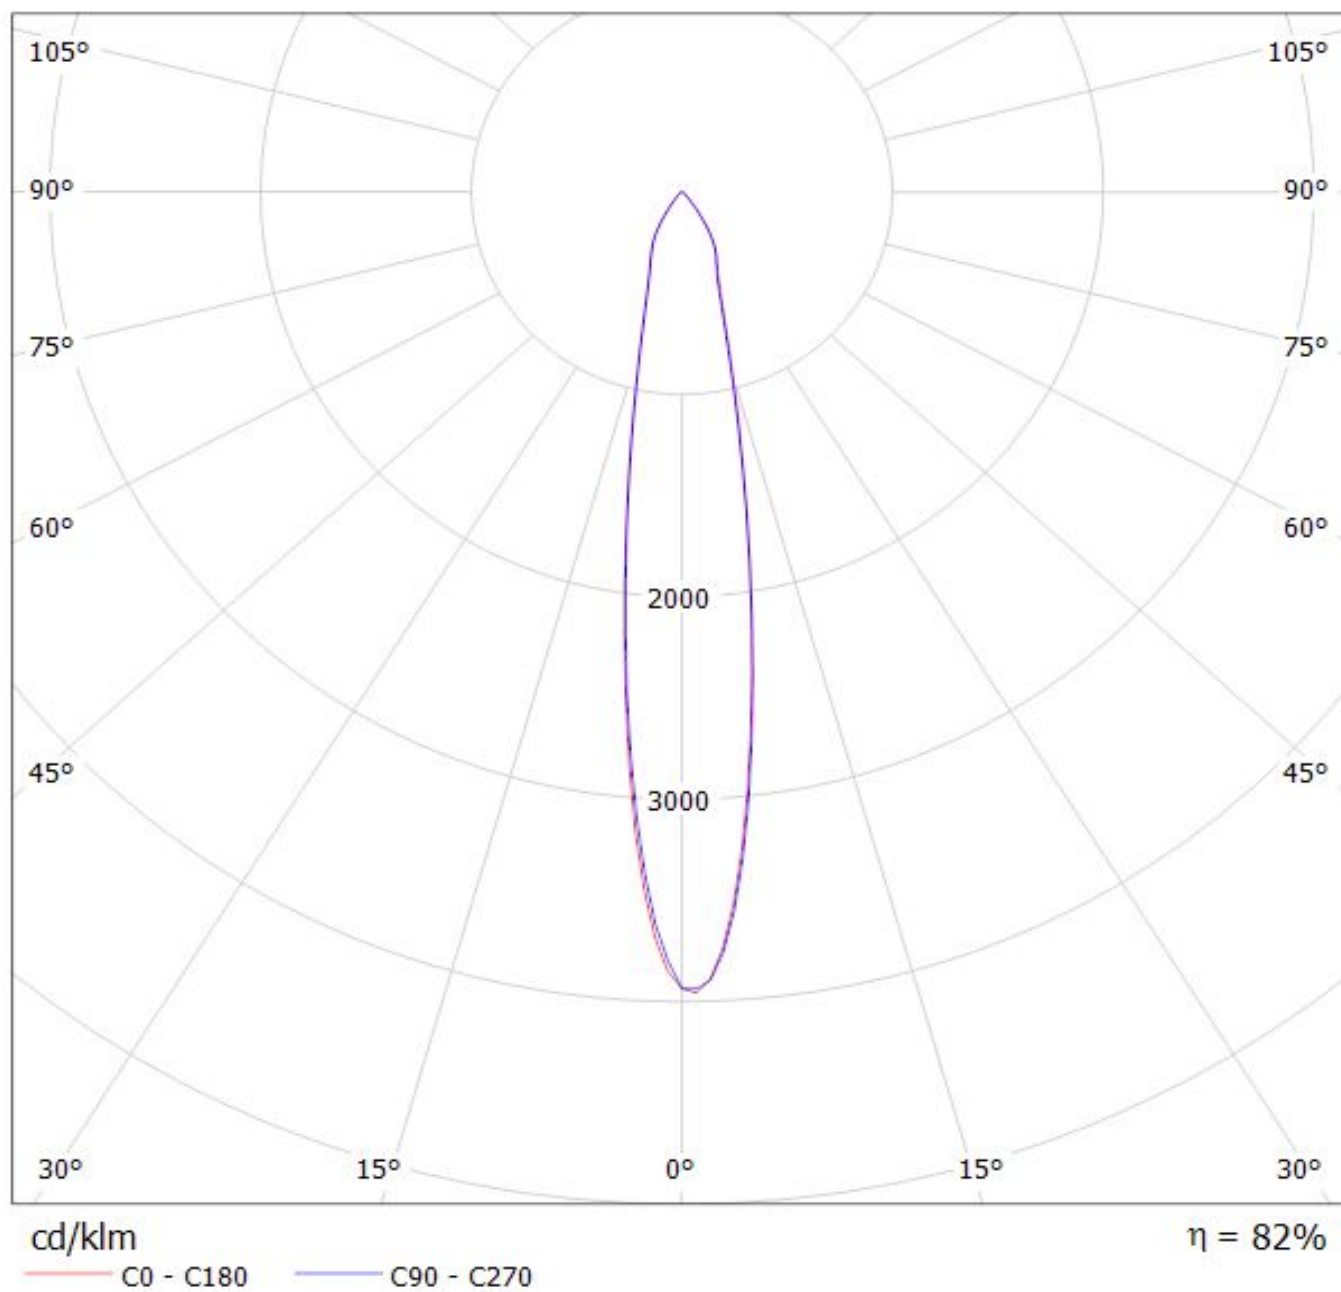

Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(Mini_Zenigata_GW6BM) Eff.84.2%
Lamps: 1 x Mini_Zenigata_GW6BM (803.772lm@250mA)

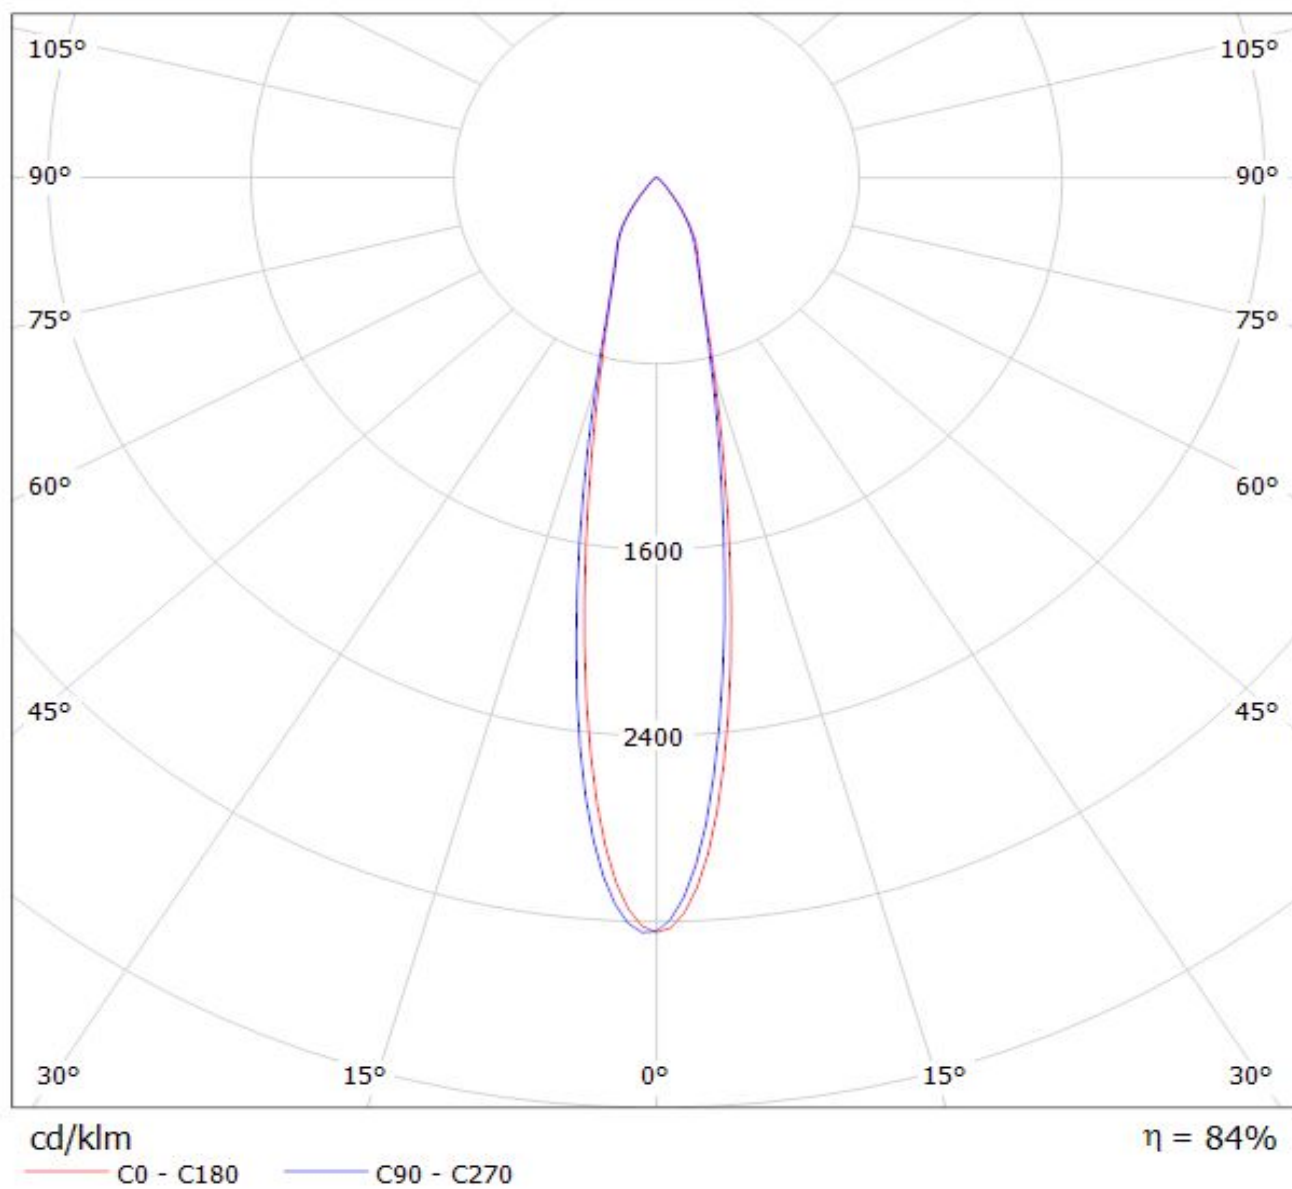


Luminaire: LEDil Oy CN13130_MIRELLA-50-S-DL-PF_(ZC6) Efficiency=83%
Lamps: 1 x Seoul ZC6 (SDW81F1C) 422lm @ 100mA CCT=3100K P=3.4W I=100mA

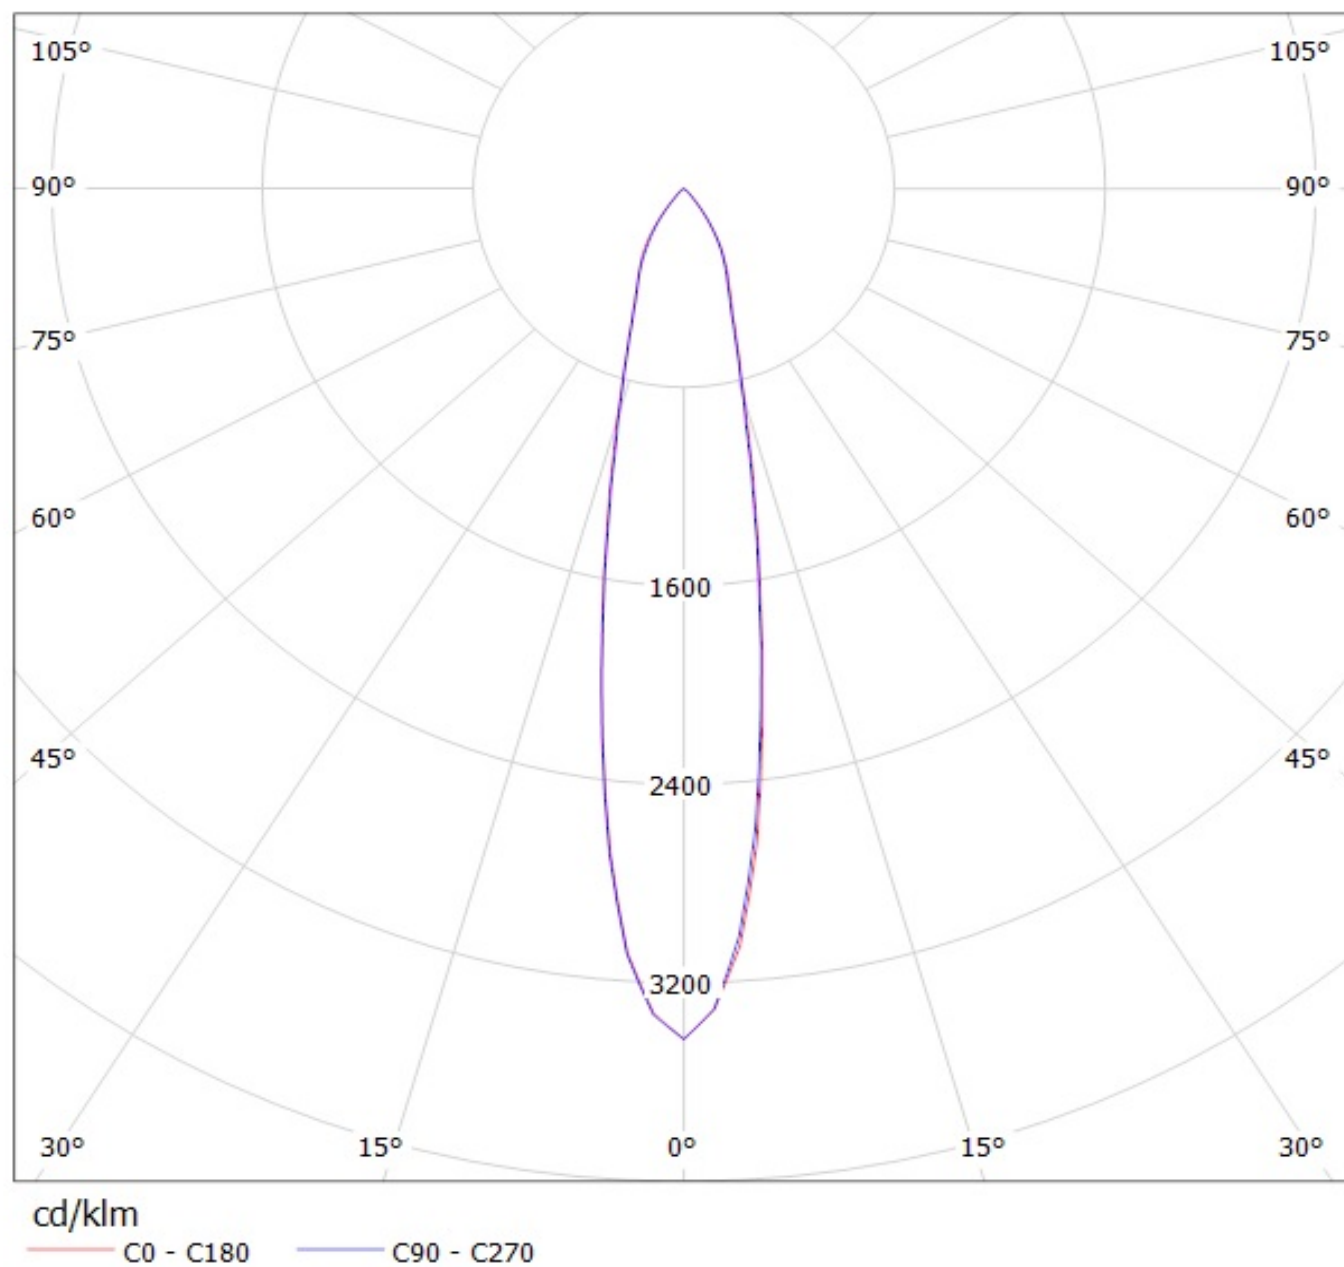

Luminaire: LEDiL Oy CN13130_MIRELLA-50-S-DL-PF_(CXM-9)

Lamps: 1 x Luminus_XNOVA_CXM-9_(AA00)_974.297lm@240mA_P=8.2836W_I=240mA

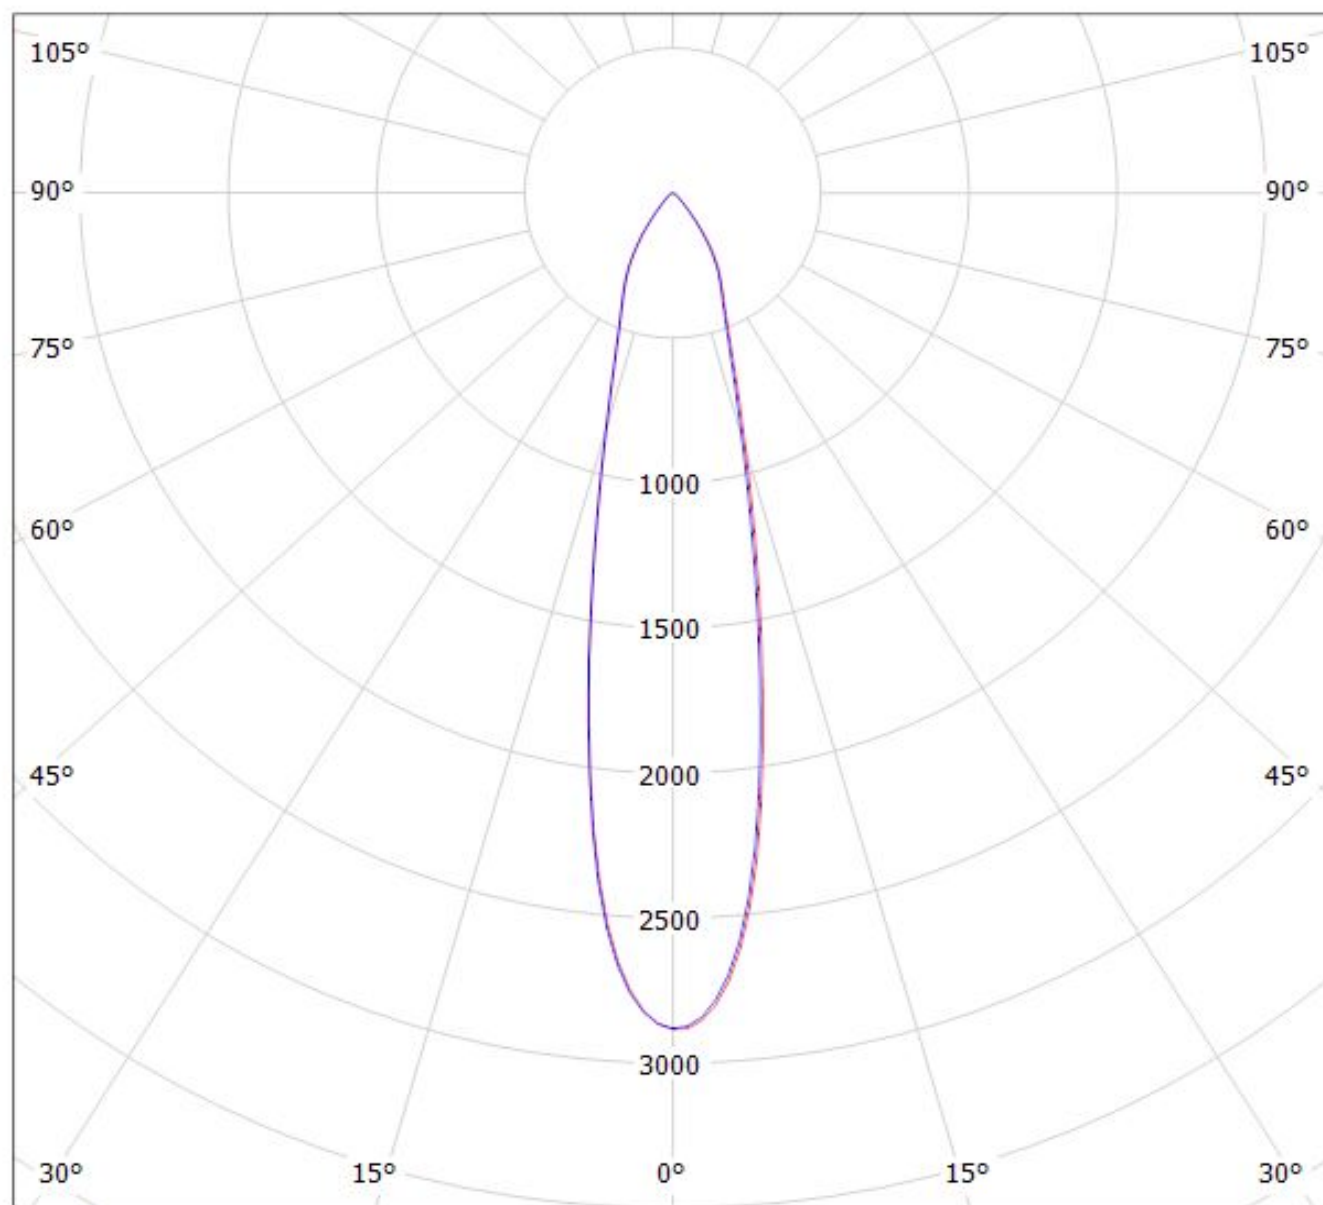

cd/klm

— C0 - C180

— C90 - C270

$\eta = 85\%$

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.