

MDL MIX GPS/GPRS FAK/FAK RG-174 5M

GPS01S-S4-01-A

1. Application:

This application shall apply for antenna unit which shall be used with under instrument board for an automobile.(for impedance 50Ω),

2. Appearance:

Antenna Unit (with radome , connector ,and cable-refer to an attached drawing)

Dimensions	85*56*19.5mm	Radome	#S
Weight	128.6g	Connector	GPS/GPRS FAK/FAK
Color	Black	Cable	RG-174 5M
Label	No	Twin Adhesive	Yes

3. Operating Condition:

Temperature : - 40 to + 85°C

Humidity : 10 to 95%RH

4. Storage Condition:

Temperature : - 40 to + 85°C

Humidity : 10 to 95%RH

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X=N/A X.X=N/A X.XX =N/A
 ANGLES=N/A HOLEDIA=N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 曾玟瑛

CHECKED BY: 楊奇峰

DESIGNED BY: 陳智威

APPROVED BY : 曾源標

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : MDL MIX GPS/GPRS FAK/FAK RG-174 5M
 GPS01S-S4-01-A

DOCUMENT
 NO.

ENS000017220

SPEC REV.
 P2

5. Electrical Specification:

All value are defined at 25±15°C , 60±20%RH , power handing 1 u watt,
Pressure 960±100HPA unless otherwise noted.

5.1 GPS Active Antenna Electrical Specification:

Parameter	Electrical Specifications
Frequency Range	1575.42MHz ± 2.5MHz
Patch Antenna Polarization	RHCP
VSWR(50ohm)	< 2.0
Elevation Patch Antenna Axial Ratio at $\theta=0$ degree (dBic)	3 typ.
Elevation maximum patch Antenna Gain or directive (dBic)	3.0 dBic typ.
Elevation Patten	Hemispherical
LNA DC Voltage	3~5V
LNA DC Current	10 ± 4 mA
LNA Amplifier Gain(dB)	≥ 25 dBm
Noise figure including filter and LNA @ambient temperature	2.5 dB Typical
LNA input near 1575 MHz P1dB	< -23 dBm
Isolation between the GPS patch including first stage filter and the GPRS antenna @1710~1990 MHz and @915~824 MHz	-45 dB Min.
Test Condition	The patch Antenna gain is the gain at the Feed point of the antenna ; do not include The cable and the connector.

5.2 Cellular/GPRS Antenna Electrical Specifications:

Parameter	Electrical Specifications
Frequency Range	824MHz ~ 896 MHz (GSM850) 880MHz ~ 960 MHz (GSM900) 1710 ~ 1880 MHz (DCS) 1850 ~ 1990 MHz (PCS)
Polarization	Linear
VSWR(50ohm)	≤ 3
Peak Gain	>2dBi
Azimuth Pattern	Omni-directional
Power Handling(W)	>10
Testing condition	The antenna gain is defined at the Antenna feed point ,not including the cable loss

UNLESS OTHER SPECIFIED TOLERANCES ON :
X=N/A X.X=N/A X.XX =N/A
ANGLES=N/A HOLEDIA=N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 曾玟瑛

CHECKED BY: 楊奇峰

DESIGNED BY: 陳智威

APPROVED BY : 曾源標

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : MDL MIX GPS/GPRS FAK/FAK RG-174 5M

DOCUMENT

ENS000017220


SPEC REV.

NO.

P2


GPS01S-S4-01-A


6. Antenna Dimension:

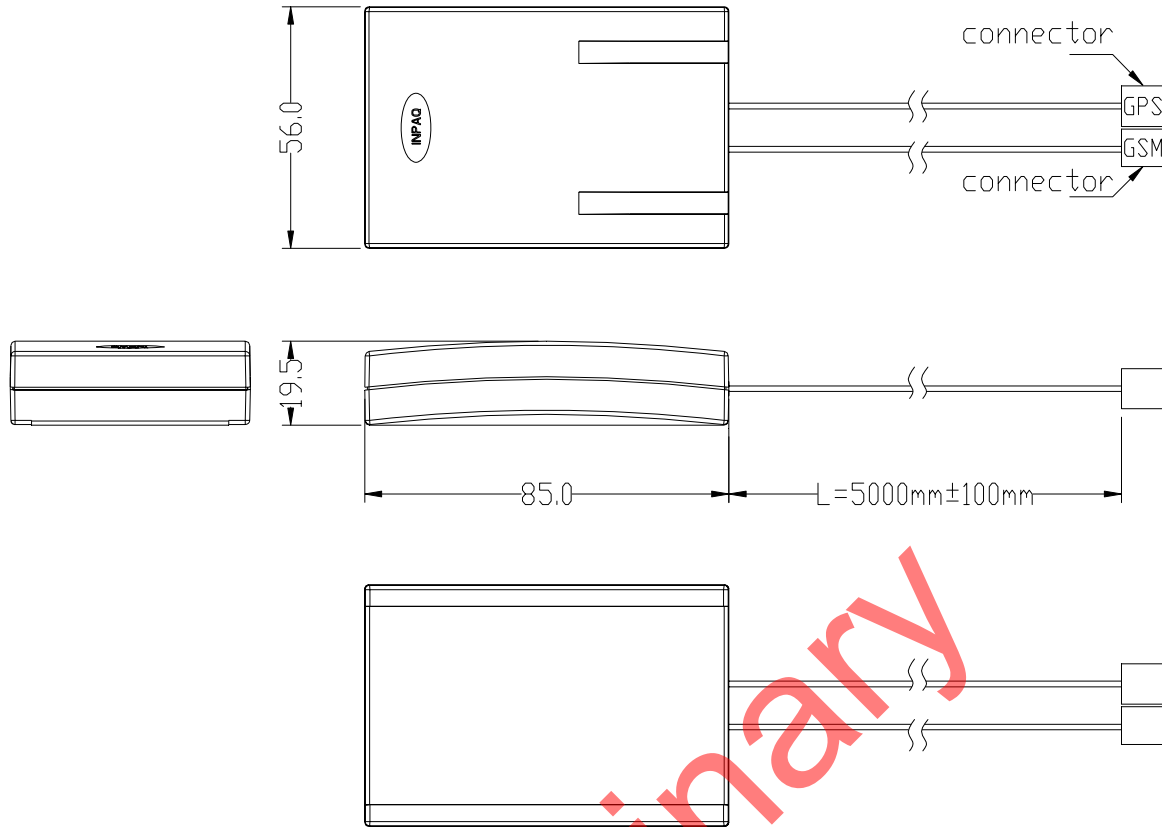

Unit:mm

Connector appearance: FAK/FAK

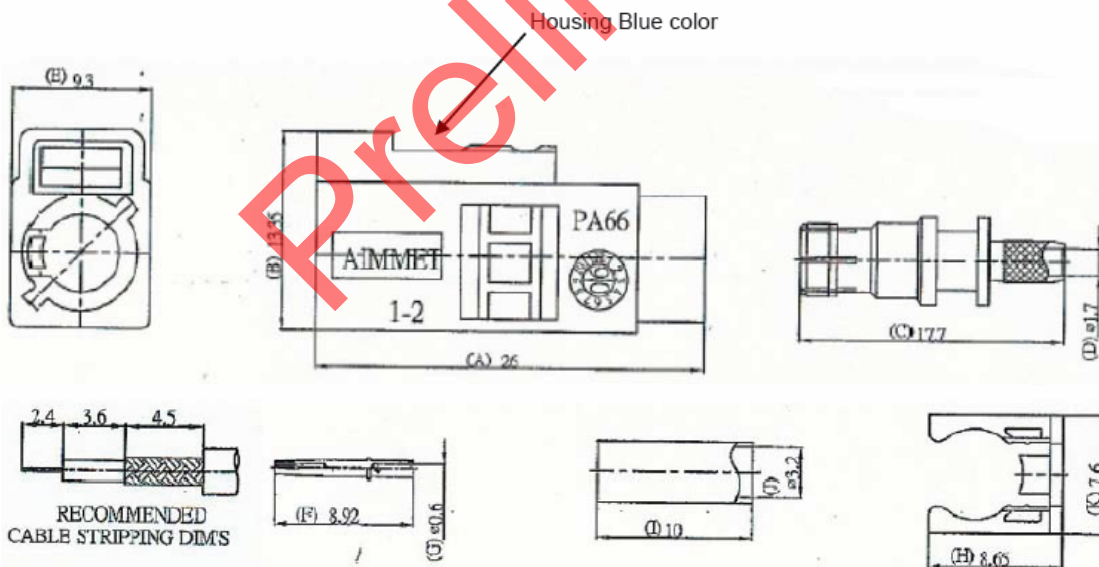

UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A X.X=N/A X.XX =N/A ANGLES=N/A HOLEDIA=N/A		 INPAQ TECHNOLOGY CO., LTD.
SCALE : N/A	UNIT : mm	
DRAWN BY : 曾玟瑛	CHECKED BY: 楊奇峰	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: 陳智威	APPROVED BY : 曾源標	
TITLE : MDL MIX GPS/GPRS FAK/FAK RG-174 5M GPS01S-S4-01-A	DOCUMENT NO.	ENS000017220 SPEC REV. P2