

Aluminum Electrolytic Type / Radial Lead Type

RoHS compliance

# ME-WG Series

Super Low ESR, Small




- 105°C 2,000 to 4,000 hours
- Non solvent proof

## ■ Specifications

Items	Condition	Specifications				
Rated voltage (V)	—	6.3	10	16	25	
Surge voltage (V)	Room temperature	8.0	13	20	32	
Category temperature range (°C)	—	-40 to +105				
Capacitance tolerance (%)	120Hz/20°C	M: ±20				
Dissipation Factor(tan δ)	tanδ(max.) 120Hz/20°C	0.22	0.19	0.16	0.14	
		Exceeding 1,000μF, +0.02 every 1,000μF				
Leakage current(LC)	μA/after 2minutes (max.), 20°C	0.03CV				
Impedance ratio at low temperature	Based on the value at 120Hz, +20°C	2 -25°C Z/Z <sub>20°C</sub>	2 -40°C Z/Z <sub>20°C</sub>	2 3	2 3	
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	ø8×11.5, ø8×16, ø10×12.5, ø10×16 : 2,000hours, ø8×20 : 3,000hours, ø10×20, ø10×23 : 4,000hours			
		△C/C	Within ±25% of the initial value			
		tanδ	Less than 200% of the specified value			
		LC	Less than the specified value			

## ■ Dimensions

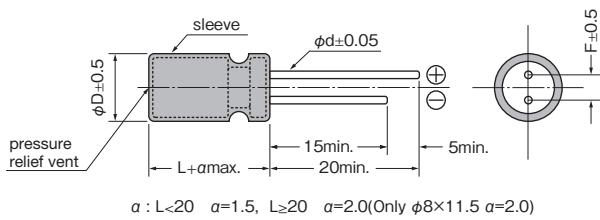

(Unit : mm)		
øD	8	10
F	3.5	5.0
ød	0.6	0.6





## ■ Size, ESR, Rated Ripple Current

V μF	6.3			10			16			25		
	Case size øDxL (mm)	ESR (Ωmax.) 20°C/100kHz	Ripple current (mArms) 105°C/100kHz									
220										8×11.5	0.030	1110
330							8×11.5	0.030	1140	8×11.5	0.032	1080
470				8×11.5	0.030	1140	8×11.5	0.036	1140	8×20 ★1	0.018	1820
										10×12.5	0.027	1390
										10×16 ★3	0.020	1920
680				8×11.5	0.036	1140	8×16 ★1	0.028	1490	10×16	0.022	1830
							10×12.5	0.026	1540	10×20 ★3	0.016	2180
820	8×11.5	0.036	1140									
1000	8×11.5	0.030	1140	8×16 ★1	0.028	1490	8×20 ★1	0.019	1870	10×23 ★1	0.016	2180
				10×12.5	0.026	1540	10×16	0.019	2000			
1200	8×16	0.028	1490	8×20 ★1	0.019	1870						
	8×20 ★1	0.019	1870	8×20 ★1	0.019	1870	10×20	0.013	2550			
1500	8×20 ★2	0.016	1950	10×16	0.019	2000						
	10×12.5	0.026	1540									
	10×16 ★3	0.018	2000									
1800	8×20 ★2	0.016	1950	10×20	0.013	2550	10×23	0.012	2800			
	10×16	0.019	2000									
2200	10×20	0.013	2550	10×23	0.012	2800						
3300	10×23	0.012	2800									

Please refer to page 14 for ripple current frequency coefficients.

★1 WGL ★2 WGL2 ★3 WGV

## ■ Part number



Radial  
Lead  
Type  
Aluminum Electrolytic  
Capacitors

ME-SWB  
ME-UZ-SZ  
ME-UAX-SAX  
ME-SWG  
ME-HC  
ME-LS  
ME-CZ  
ME-CA  
ME-CX  
ME-AX  
ME-WX  
ME-WA  
ME-WL  
ME-WG  
ME-FX  
ME-PX  
ME-HPC·HPD  
ME-FC·FD  
ME-FH  
ME-SWN  
ME-HWN