
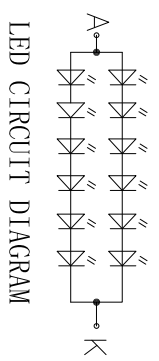
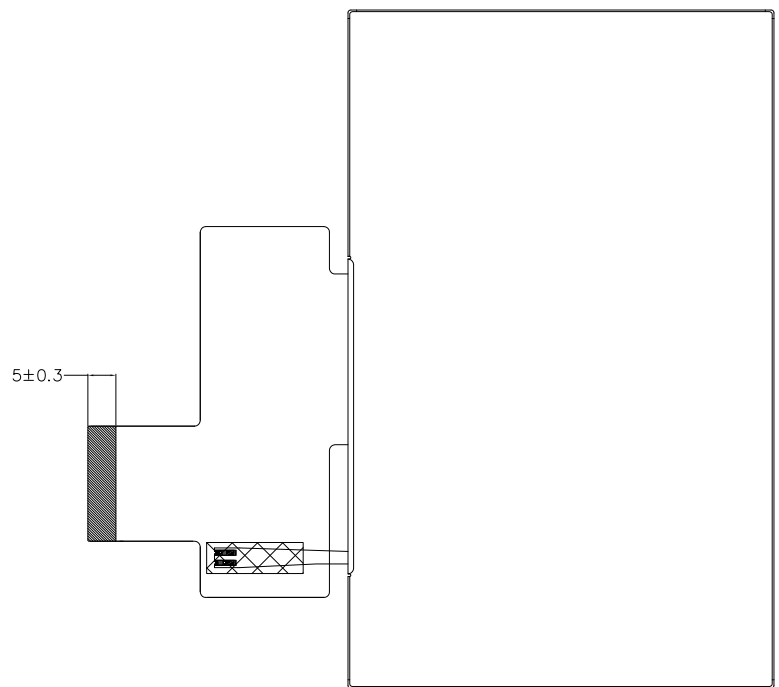

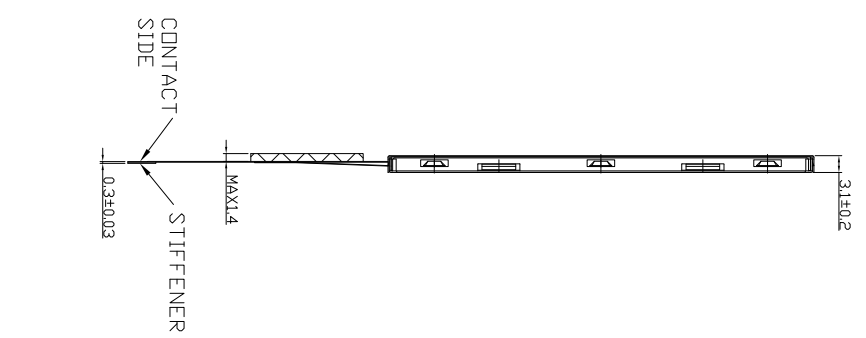


PIN DESCRIPTION

PIN NO	SYMBOL	DESCRIPTION
1	LED_K	
2	LED_A	
3	GND	
4	VDD	
5	R0	
6	R1	
7	R2	
8	R3	
9	R4	
10	R5	
11	R6	
12	R7	
13	G0	
14	G1	
15	G2	
16	G3	
17	G4	
18	G5	
19	G6	
20	G7	
21	B0	
22	B1	
23	B2	
24	B3	
25	B4	
26	B5	
27	B6	
28	B7	
29	GND	
30	CLKIN	
31	STBYB	
32	HSD	
33	VSD	
34	DBN	
35	NC	
36	GND	
37	NC	
38	NC	
39	NC	
40	NC	

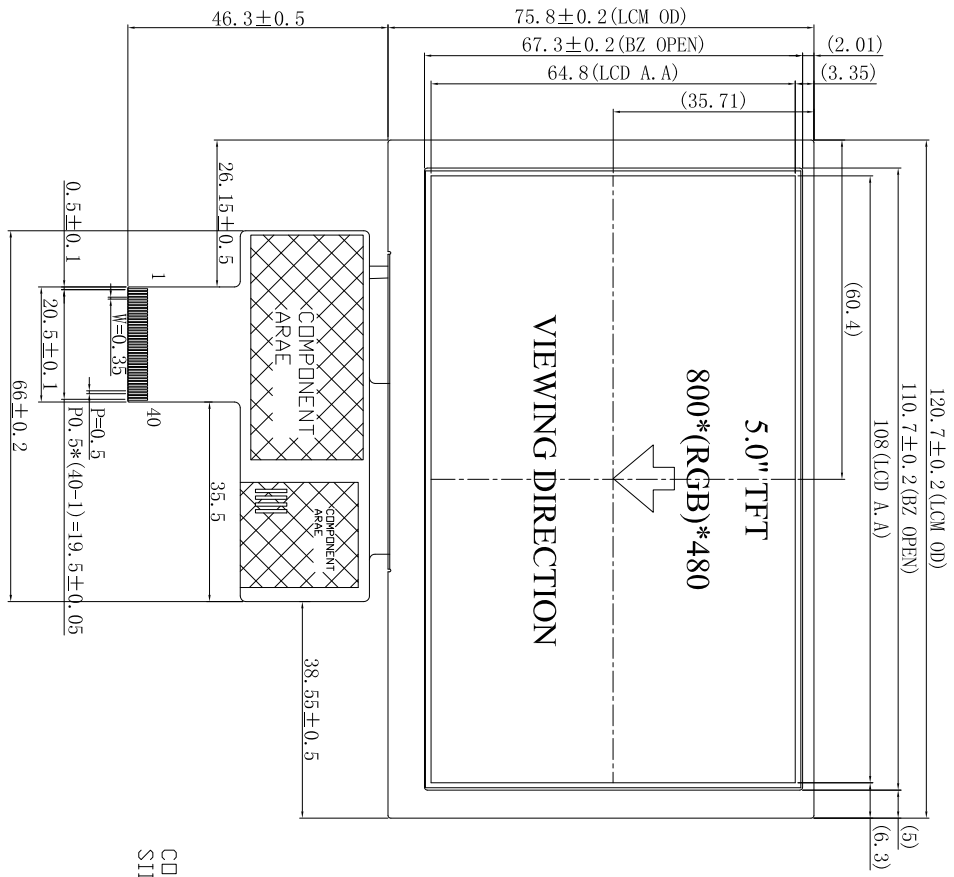

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, POSITIVE.
  2. OPERATING VOLTAGE: VDD=3.3V.
  3. VIEWING DIRECTION: 12.0° CLOCK.
  4. IC DRIVER: ILI5960+ILI6122.
  5. OPERATING TEMP: -20°C ~ 70°C.
  6. STORAGE TEMP: -30°C ~ 80°C.
  7. LED BACKLIGHT: 12-CHIP WHITE LED, If=40mA, Vf=19.2V.
  8. SURFACE LUMINANCE: 600cd/m<sup>2</sup>(TYP).
  9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
  10. GENERAL TOLERANCE: ±0.2.
  11. ROHS COMPLIANT.

01	FIRST ISSUE	2016.04.12	<b>MULTI-INNO TECHNOLOGY CO., LTD.</b>	
VER.	REVISED DESCRIPTION	DATE	DRAWN BY: CAROL 2016.04.12	SCALE: 1/1
			CHECKED BY:	UNIT: mm
			APPROVED BY:	DESCRIPTION: TFT MODULE
			VERSION NO: 01	MODULE P/N: M10500PT-17