

New energy 300 - 1500VDC over wide and over high input voltage isolation converter



FEATURES

- Ultra wide input voltage range: 300 - 1500VDC
- 4000VAC high isolation voltage
- Industrial grade operating temperature: -40°C to +70°C
- High efficiency, Low ripple & noise
- High reliability, Long lifespan
- Input Under-voltage Protection, Reverse input voltage protection, output short circuit, over-current, over-voltage protection
- Meets UL1741, CSA-C22.2 No.107.1, EN62109 standards (Pending)
- Meets 5000m altitude requirements

PV200-29Bxx series —— 300-1500VDC ultra wide input voltage regulated DC-DC converter, which have advantages such as high efficiency, high reliability and high safety isolation. The series products are widely used in industries such as photovoltaic power generation, stored energy and high voltage frequency conversion, provide a stable operating voltage for the load device, Its multiple protection features can enhance the safety performance of the module power supply and the load under abnormal working conditions.

Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current(Vo/Io)	Efficiency (850VDC, %/Typ.)	Max. Capacitive Load(μF)
UL/CSA/CE (Pending)	PV200-29B24	200W	24V/8.4A	86	5000
	PV200-29B48		48V/4.2A	87	2000

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range		300	--	1500	VDC
Input current	300VDC	--	--	1200	mA
	850VDC	--	--	450	
	1500VDC	--	--	200	
Inrush current	850VDC	--	150	--	A
	1500VDC	--	250	--	
Input under-voltage protection	Under-voltage protection begins	265	--	285	VDC
	Under-voltage protection release	275	--	295	
External input fuse		15A/1500VDC, necessary			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	0% - 100% load	--	--	±2	%	
Line Regulation	Full load	--	--	±1		
Load Regulation	0% - 100% load	--	--	±1		
Ripple & Noise*	20MHz bandwidth (peak-peak value)	--	200	300	mV	
Temperature Drift Coefficient		--	±0.02	--	%/°C	
Short Circuit Protection		Hiccup, Continuous, self-recovery				
Over-current Protection		110 - 300%Io, hiccup, self-recovery				
Over-voltage Protection	24V output	≤35VDC or hiccup protection				
	48V output	≤60VDC or hiccup protection				
Min. Load		0	--	--	%	
Hold-up Time	Room temperature, Full load	850VDC input	5	--	--	ms
		1500VDC input	8	--	--	
Start delay time**	300-1500VDC	--	3	--	s	

Note: * Ripple and noise are measured by "parallel cable" method, please see "Ultra-wide High Input Voltage PV Power Supply Application Guide".

**Start-up delay time Test conditions:full voltage input range,full output load range(product input power-down to the input voltage re-power-on cooler time is greater than 15s.)

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	Input - output	Test time: 1min, Leakage current $\leq 10\text{mA}$	4000	--	--	VAC
	Input - PE	Test time: 1min, Leakage current $\leq 5\text{mA}$	2000	--	--	
	Output - PE		2000	--	--	
Operating Temperature			-40	--	+70	°C
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Power Derating	-40°C to -25°C		3.33	--	--	% / °C
	+55°C to +70°C		3.33	--	--	
	1400 - 1500VDC		0.20	--	--	
Switching Frequency			--	65	--	kHz
Safety Standard			UL1741, CSA-C22.2 No.107.1, EN62109			
Safety Certification			UL1741, CSA-C22.2 No.107.1, EN62109 (Pending)			
MTBF			MIL-HDBK-217F@25°C $\geq 300,000$ h			




Physical Specifications

Casing Material	Metal
Dimensions	215.00*125.00*50.00mm
Weight	1370g (Typ.)
Cooling method	Free air convection



EMC Specifications

EMI	CE	CISPR32/EN55032	CLASS A	
	RE	CISPR32/EN55032	CLASS A	
EMS	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 1\text{KV}$ /line to ground $\pm 2\text{KV}$	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A

Product Characteristic Curve

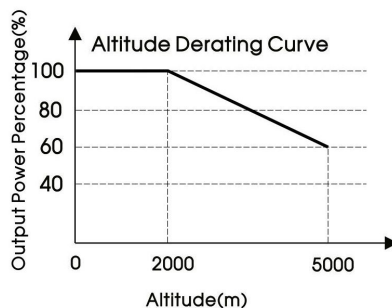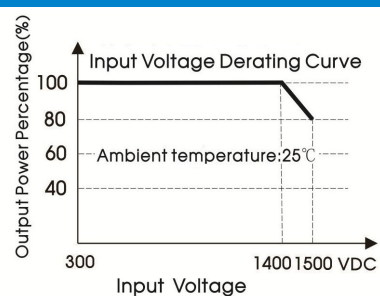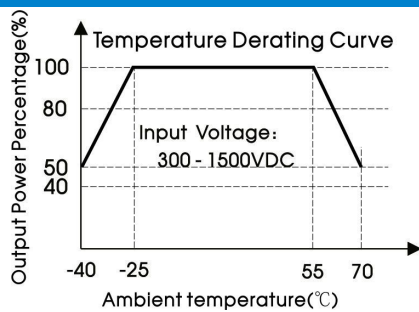


- Note: ① Input voltage should be derated based on temperature derating when it is 1400-1500VDC;
 ② For the PV200-29Bxx, altitude should be derated based on temperature de-rating profile when it is 2000 - 5000m;
 ③ This product is suitable for use in natural air cooling environments, if in a closed environment, please contact our company's FAE.

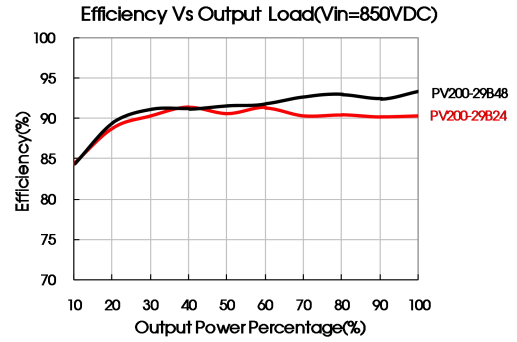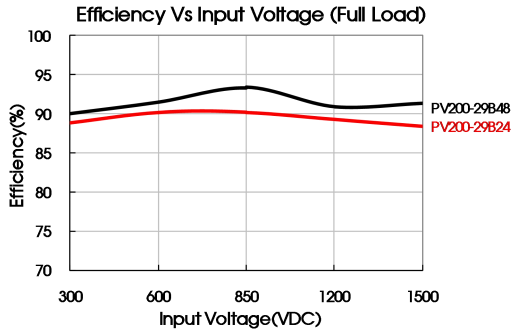

设计参考

1. Application of Trim and calculation of Trim resistance

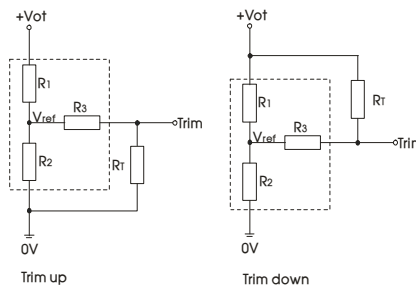

Applied circuits of Trim (Part in broken line is the interior of models)

Calculation formula of Trim resistance:


$$\begin{aligned} \text{up: } R_T &= \frac{aR_2}{R_2 - a} - R_3 & a &= \frac{V_{ref}}{V_{ot} - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{aR_1}{R_1 - a} - R_3 & a &= \frac{V_{ot} - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

R_T is Trim resistance
 a is a self-defined parameter, with no real meaning.

Vout	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)	Vot(V)
24V	8.66	1	1	2.5	Output voltage after regulation, variation ≤ ±10%
48V	17.8	1	1	2.5	

2. For more information Please refer to Ultra-wide High Input Voltage PV Power Supply Application Guide

Dimensions and Recommended Layout

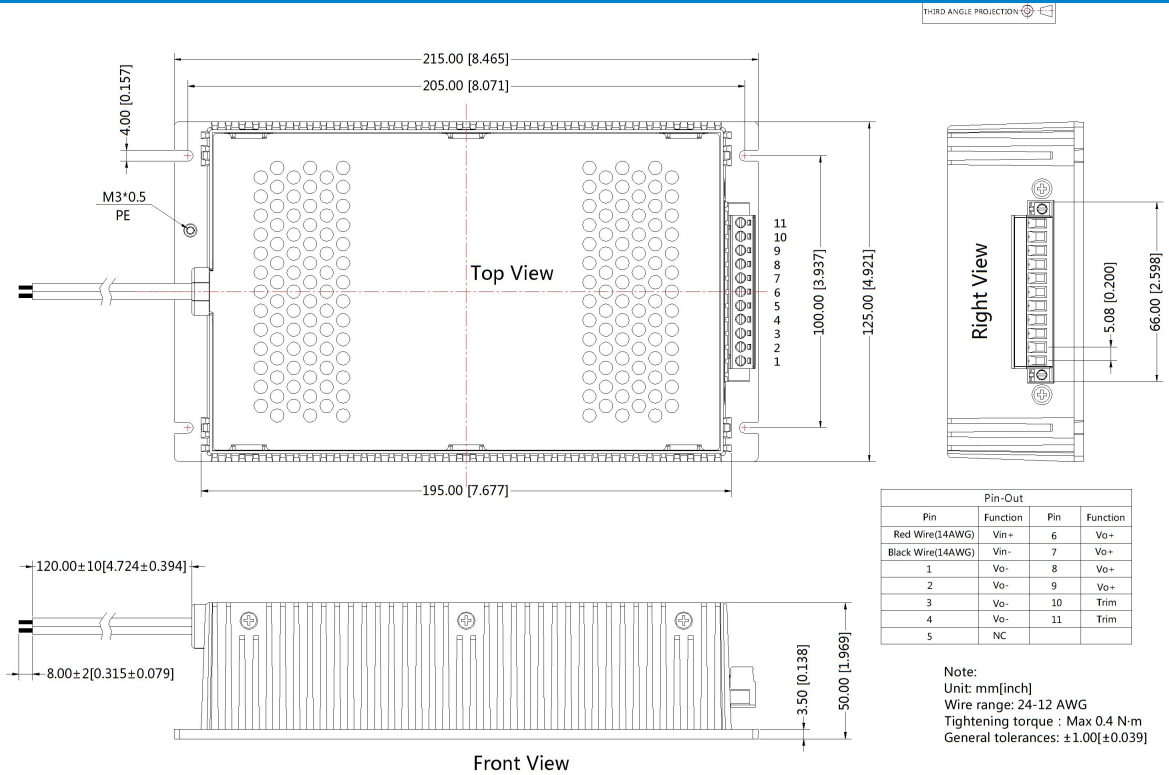

- Note:
1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com. Packing bag number: 58220053;
 2. Unless otherwise specified, data in this datasheet should be tested under the conditions of $T_a=25^\circ\text{C}$, humidity<75% when inputting nominal voltage and outputting rated load;
 3. All index testing methods in this datasheet are based on our Company's corporate standards;
 4. In order to improve the conversion efficiency, when the module is working under high pressure, the module may have certain audio noise, but does not affect the reliability of the product;
 5. We can provide product customization service, please contact our technicians directly for specific information;
 6. Products are related to laws and regulations: see "Features" and "EMC";
 7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn