
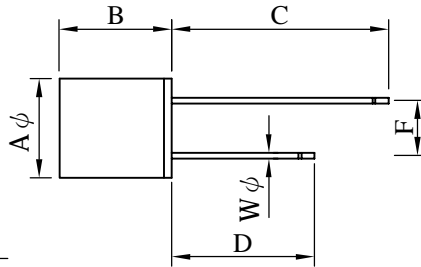


# SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Radial Inductor	ABC'S DWG NO.	RH0912□□□□L□-□□□		
		REV.	20121004-A	PAGE	1

## I . Configuration and dimensions :



Unit : m/m

Aφ	B	C	D	F	Wφ
9.30 ±0.3	11.80 ±0.3	25.00 ±5.0	18.00 ±5.0	5.00 ±0.3	0.65 ±0.05

## II . Description :

- a . Ferrite drum core construction.
- b . Enamelled copper wire : F class
- c . Product weight : 1.87 g ( ref. )
- d . Moisture sensitivity Level 1
- e . Products comply with RoHS' requirements
- f . Halogen free available

## III . General specification :

- a . Storage temp. : -40°C ~ +125°C
- b . Operating temp. : -40°C ~ +125°C  
( Temp. rise included. )

AR-001C

# SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Radial Inductor	ABC'S DWG NO.	RH0912□□□□L□-□□□		
		REV.	20121004-A	PAGE	2

IV . Electrical characteristics :

DWG No.	Inductance ( $\mu$ H)	Q ref.	Test Freq. ( Hz )		SRF ( MHz ) typ.	RDC ( $\Omega$ ) max.	IDC ( A ) max.
			L	Q			
RH09121R5ML□-□□□	1.5 $\pm$ 20%	30	1K	7.960M	78.0	0.008	5.40
RH09122R2ML□-□□□	2.2 $\pm$ 20%	30	1K	7.960M	63.0	0.010	4.50
RH09123R3ML□-□□□	3.3 $\pm$ 20%	30	1K	7.960M	50.0	0.018	3.60
RH09124R7ML□-□□□	4.7 $\pm$ 20%	30	1K	7.960M	41.0	0.022	3.10
RH09126R8ML□-□□□	6.8 $\pm$ 20%	30	1K	7.960M	33.0	0.028	2.50
RH0912100KL□-□□□	10.0 $\pm$ 10%	60	1K	2.520M	27.0	0.043	2.10
RH0912150KL□-□□□	15.0 $\pm$ 10%	50	1K	2.520M	21.0	0.056	1.70
RH0912220KL□-□□□	22.0 $\pm$ 10%	50	1K	2.520M	17.0	0.086	1.40
RH0912330KL□-□□□	33.0 $\pm$ 10%	45	1K	2.520M	13.0	0.140	1.10
RH0912470KL□-□□□	47.0 $\pm$ 10%	40	1K	2.520M	11.0	0.170	0.96
RH0912680KL□-□□□	68.0 $\pm$ 10%	35	1K	2.520M	9.0	0.280	0.79
RH0912101KL□-□□□	100.0 $\pm$ 10%	55	1K	0.796M	7.2	0.330	0.66
RH0912151KL□-□□□	150.0 $\pm$ 10%	40	1K	0.796M	5.7	0.560	0.53
RH0912221KL□-□□□	220.0 $\pm$ 10%	30	1K	0.796M	4.5	0.720	0.44
RH0912331KL□-□□□	330.0 $\pm$ 10%	25	1K	0.796M	3.6	1.100	0.36
RH0912471KL□-□□□	470.0 $\pm$ 10%	25	1K	0.796M	2.9	1.700	0.30
RH0912681KL□-□□□	680.0 $\pm$ 10%	25	1K	0.796M	2.3	2.300	0.25
RH0912102KL□-□□□	1000.0 $\pm$ 10%	55	1K	0.252M	1.9	4.300	0.20


- 1). Electrical specifications at 25°C
- 2). IDC base on Temp. rise 20°C max.

# SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Radial Inductor	ABC'S DWG NO.	RH0912□□□□L□-□□□		
		REV.	20121004-A	PAGE	3

V . Packaging information :

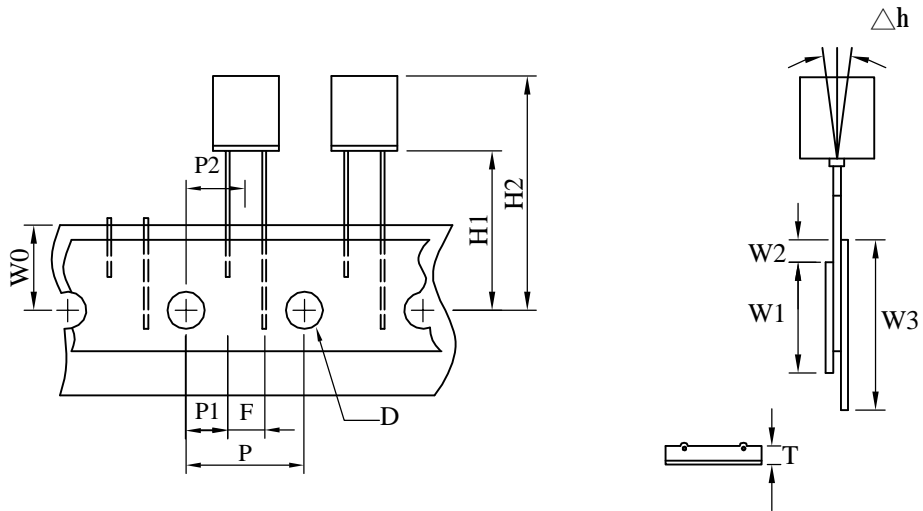

Item	Symbol	Specification			
		Milimeter		Inch	
		Size	Tolerance	Size	Tolerance
Tape feed hole diameter	D	4.00	±0.20	0.157	±0.008
Component lead pitch	F	5.00	±0.50	0.200	±0.020
Front-to-rear delectton	△h	2.00	max.	0.079	max.
Feed hole to bottom of component	H1	18.50	±0.80	0.728	±0.040
Feed hold to overall component height	H2	30.30	±1.00	1.083	±0.040
Feed hole pitch	P	12.70	±0.30	0.500	±0.012
Lead location	P1	3.85	±0.70	0.152	±0.028
Center of component location	P2	6.35	±1.30	0.250	±0.051
Overall taped package thinkness	T	1.42	max.	0.056	max.
Feed hole location	W0	9.00	±0.50	0.354	±0.020
Adhesive tape width	W1	15.00	±0.50	0.598	±0.020
Adhesive tape position	W2	4.00	max.	0.157	max.
Tape wide	W3	18.00	±0.50	0.709	±0.020

AR-001C

# SPECIFICATION FOR APPROVAL

REF. :


PROD. NAME	Radial Inductor	ABC'S DWG NO.	RH0912□□□□L□-□□□		
		REV.	20121004-A	PAGE	4

Packaging no. : B

Reel : 500 PCS


Packaging information :

1、Internal packaging : 500 Pcs / Reel

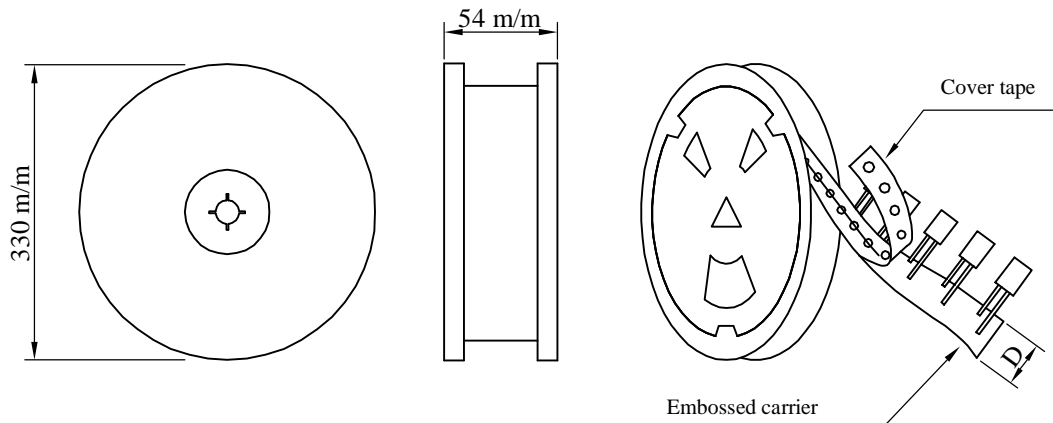


2、Middle packaging : 1 R / Box

※Carrier tape width : D

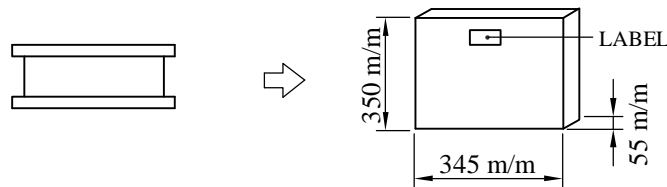

3、External packaging : 6 Box / Carton



QTY & G.W.Per Packaging

DWG NO.	Inner : Reel			Outer : Carton		
	QTY(pcs)	G.W.(gw)	Style (m/m)	QTY(pcs)	G.W.(Kg)	Size (cm)
RH0912	500	1100	13-54	3,000	7.20	37.5x37.0x37.5


AR-001C

# SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Radial Inductor	ABC'S DWG NO.	RH0912□□□□L□-□□□		
		REV.	20121004-A	PAGE	5

VI . Dwging number expression :

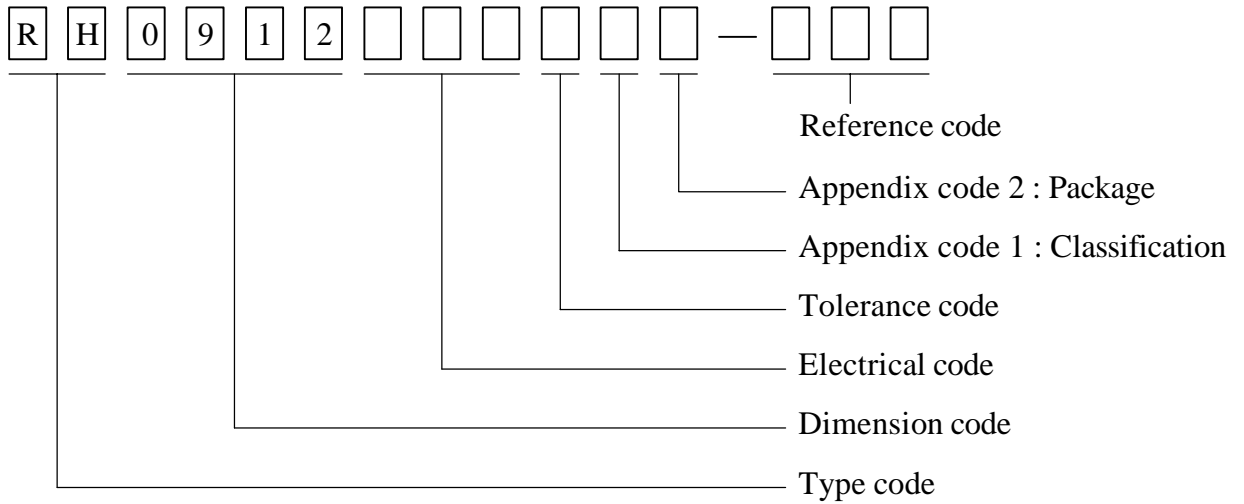

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R ( Reel package )	500 pcs	
C	Box	200 pcs	
D	T / B ( Box package )	1,000 pcs	

# SPECIFICATION FOR APPROVAL

REF. :

PROD.	Radial Inductor	ABC'S DWG NO.	RH0912□□□□L□-□□□		
NAME		REV.	20121004-A	PAGE	6

## VII . Reliability test :

Item	Reference documents	Test Condition	Test Specification
1.High Temperature Exposure	MIL-STD-202 Method 108	1.Temperature: 125°C 2.Time:96 hours.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
2.Temperature Cycling	JESD22 Method JA-104	1.Temperature: -40°C ~ 125°C 2.Number of cycle:96 cycle 3.Dwell time:30 minutes	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
3.Biased Humidity Test	MIL-STD-202 Method 103	1.Temperature: 85±5 °C 2.Time:96 Hours 3.Humidity: 85±5% RH.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
4.Operational Life	MIL-PRF-27	1.Temperature: 125°C 2.Time:96 hours. 3.Apply rated current.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
5.Exeternal Visual	MIL-STD-883 Method 2009	Inspect product constructions, marking and workmanship.	1.No pollution on the surface of products. 2.Clear marking. 3.No crack.
6.Physical Dimensions	JESD22 Method JB-100	Verify physical dimensions to the applicable product detail specification.	Per product specification standard
7.Resistance to solvents	MIL-STD-202 Method 215	Immerse into solvent for 3±0.5 minutes & brush 10 times for therr cycles.	1.No body change in apperarence. 2.No marking blurred. 3.Inductance shall not change more than ±10%.
8.Vibration Test	MIL-STD-202 Method 204	1.Frequency and Amplitued : 10-2000-10 Hz, 1.5 mm. 2.Direction:X, Y, Z 3.Test duration:2 hours for each direction, 6 hours in total.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
9.Resistance To Soldering Heat Test	MIL-STD-202 Method 210	1.Method : Dip 2.Temperature : 260±5 3.Time ( temp. ≥ 260°C ) : 10 second. 4.Number of times : 3 times.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
10.Rated current	MIL-STD-202 Method 330	Apply rated current for 5 second.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
11.Temperature rise	MIL-PRF-27	Apply rated current for 10 minutes.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
12.Over load	MIL-PRF-27	Apply twice as rated current for 5 minutes. (It's not application to some special design)	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
13.Solderability Test	J-STD-002	Dip pads in flux then dip in solder pot at 240±5 for 5 senconds.	Teminals area must have 95% min. Solder coverage.
14.Electrical Characteriazation	User Spec.	1.Operating temperature : -40°C ~125°C 2.Room temperature : 25°C.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
15.Withstanding Voltage Test	MIL-STD-202 Method 201	1.DV:500V 2.Time:1minutes	1.During the test no breakdown. 2.The characteristic is normal after test.
16.Drop	JESD22-B111	Packaged & Drop down from 1m.In 1 angle Iridges & 2 surfaces orientation.	1.No case deformation or change in appearance. 2.Inductance shall not change more than ±10%.
17.Terminal Strength Test	JIS-C-6429	1.Apply push force to samples mounted on PCB. 2.Force of 1.8 kg for 60±1 seconds.	After test, inductors shall be no mechanical damage.

AR-001C