

Harvatek Surface Mount Phototransistor Data Sheet B1501PT--H9B-000113

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data She	et No.
Tentative Product	*******	********	-	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		12/29/2017	Version 1.3	Page 1/14



DISCLAIMER	3
LIFE SUPPORT POLICY	3
PRODUCT SPECIFICATIONS	4
ATTENTION: ELECTROSTATIC DISCHARGE (ESD) PROTECTION	4
LABEL SPECIFICATIONS	5
ELECTRICAL OPTICAL CHARACTERISTICS	6
PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFLOW	
SOLDERING	7
CHARACTERISTICS OF B1501PT	8
PACKAGING	10
TAPE DIMENSION	10
REEL DIMENSION	11
Packing	11
DRY PACK	12
Baking	12
PRECAUTIONS	12
REFLOW SOLDERING	13
Reworking	13
CLEANING	13
CAUTIONS OF PICK AND PLACE	14
Revise History	14

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data She	eet No.
Tentative Product	********	*******	-	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		12/29/2017	Version 1.3	Page 2/14



DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data She	eet No.
Tentative Product	*******	*******	-	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		12/29/2017	Version 1.3	Page 3/14



Product Specifications

Item	Specification	Material	Quantity
Spectral Bandwidth	750nm~1100nm		
λ_{D}	@ V _{CE} =5V / T _S = 25°C		
Peak Sensitivity	940nm		
λ_{P}	@ V _{CE} =5V / T _S = 25°C		
Collector Light Current	0.1~0.8mA		
Ic	@ $E_e = 1$ mW/cm2; $\lambda_P = 940$ nm, $V_{CE} = 5$ V		
Resin	Black	Ероху	
Carrier tape	EIA 481-1A specs	Conductive black tape	4000ea/reel
Reel	EIA 481-1A specs	Conductive black	
Label	HT standard	Paper	
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel per bag
Carton	HT standard	Paper	Non-specified

Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of Iv, CIE and Vf. Each reel has a label identifying its specification; the immediate box consists of a product label as well.

Note: This is shipped test conditions

*Remarks: This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

ATTENTION: Electrostatic Discharge (ESD) protection



The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are **STATIC SENSITIVE devices**. ESD precaution must


be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.


Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data She	eet No.
Tentative Product	********	*******	-	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		12/29/2017	Version 1.3	Page 4/14



Label Specifications

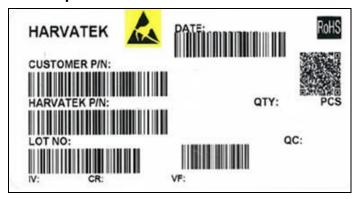

■Harvatek P/N:

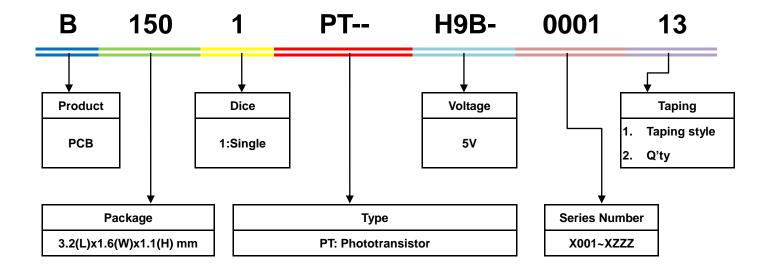

■ Lot No.:

1	2	3	4	5	6	7	8	9	10
E	1	A	1	Α	2	2	L	1	2
Cod	le 1 2	Code 3	Code 4	Code 5	Code 6	Code 7	Code 8	Code 9	Code 10
		Mfg. Year	Mfg. Month	Mfg. Date	Consecuti	ve number		Special cod	e
		2010-A		1:A					
		2011-B		2:B					
		2012-C	1:Jan.	3:C					
			2:Feb.	***					
(atama) Ta		2018-I/J	11888	26:Z	04	77		000~ZZZ	
internal ir	acing Code	2019-K	A:Oct.	27:7	01-	-ZZ		000~222	
		1	B:Nov.	28:8					
		2022-N	C:Dec.	29:9					
		2023-P	17 16 15 15 15 15 15 15 15 15 15 15 15 15 15	30:3					
		244		31:4					

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data She	et No.
Tentative Product	*******	*******	-	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		12/29/2017	Version 1.3	Page 5/14



Absolute Maximum Rating at 25℃

Symbol	Parameters	Ratings	Units	Notes
V_{CEO}	Collector-Emitter Voltage	30	V	
V _{ECO}	Emitter-Collector Voltage	5	V	
Ic	Collector Current	20	mA	
T _{opr}	Operating Temperature	-40 ~ +85	$^{\circ}$ C	
T _{stg}	Storage Temperature	-40 ~ +100	$^{\circ}\!\mathbb{C}$	
T _{sol}	Soldering Temperature	260	$^{\circ}\!\mathbb{C}$	1

Notes:

1. Soldering time ≤ 5 seconds.

Electrical Optical Characteristics

Symbol	Parameters	Test conditions	Min	Тур	Max	Units	Notes
$\lambda_{0.5}$	Range Of Spectral Bandwidth		750	-	1100	nm	
λ_{P}	Wavelength Of Peak Sensitivity		ı	940	ı	nm	
BV _{CEO}	Collector-Emitter Breakdown Voltage	I_C =100 μ A E_e =0mW/cm ²	30	-	-	V	
BV _{ECO}	Emitter-Collector Breakdown Voltage	I _E =100μA E _e =0mW/cm²	5	-	-	V	
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C =2mA E _e =1mW/cm²	-	-	0.4	V	
I _{CEO}	Collector Dark Current	V_{CE} =20V E_e =0mW/cm ²	-	-	100	nA	
I _{C(ON)}	On State Collector Current	$E_e = 1 \text{mW/cm}^2$ $\lambda_P = 940 \text{nm}, \ V_{CE} = 5 \text{V}$	0.1	0.5	-	mA	2
t _r	Rise Time	V _{CE} =5V, I _C =1mA	-	15	-	μS	3
t _f	Fall Time	R _L =1000Ω	-	15	-	μS	3

Notes:

2. Ic Bin Rank::


Bin Code	B1
Min	0.1
Max	0.8

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data She	eet No.
Tentative Product	********	*******	-	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		12/29/2017	Version 1.3	Page 6/14




Notes:

3. Test circuit::

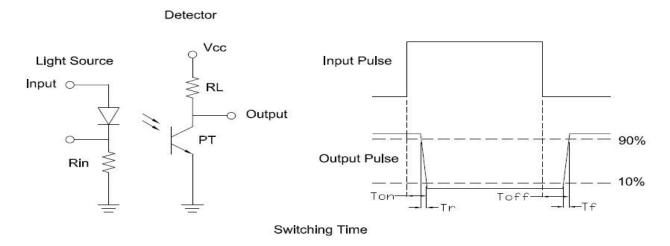

Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering


(Unit: mm Tolerance: +/-0.1)

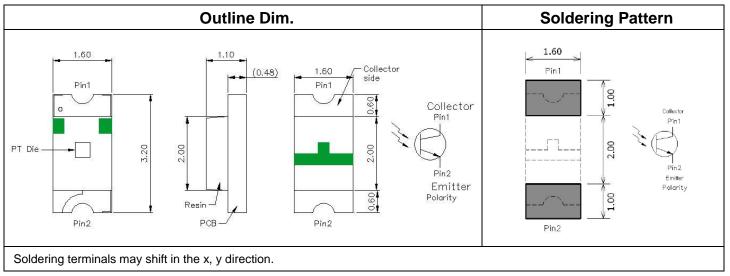



Official Product HT Part No. B1501PTH9B-000113 Customer Part No. Data Sheet No.				
Official Product	HI FAILING. BISUIFIH9B-000113	Customer Part No.	Data Sheet No.	
Tentative Product	*******	*******	-	
	t to changes for improvement without y data, drawings, company confidential	12/29/2017	Version 1.3	Page 7/14



Characteristics of B1501PT







Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data Sheet No.	
Tentative Product	*******	*******	-	
1 .	t to changes for improvement without ry data, drawings, company confidential	12/29/2017	Version 1.3	Page 8/14




Precaution for Use


- 1. The chips should not be used directly in any type of fluid such as water, oil, organic solvent, etc.
- 2. When the LEDs are illuminating, the maximum ambient temperature should be first considered before operation.
- 3. LEDs must be stored in a clean environment. A sealed container with a nitrogen atmosphere is necessary if the storage period is over 3 months after shipping.
- 4. The LEDs must be used within 4 weeks after unpacked. Unused products must be repacked in an anti-electrostatic package, folded to close any opening and then stored in a dry and cool space.
- 5. The appearance and specifications of the products may be modified for improvement without further notice.
- 6. The LEDs are sensitive to the static electricity and surge. It is strongly recommended to use a grounded wrist band and anti-electrostatic glove when handling the LEDs.If a voltage over the absolute maximum rating is applied to LEDs, it will damage LEDs.Damaged LEDs will show some abnormal characteristics such as remarkable increase of leak current, lower turn-on voltage and getting unlit at low current.

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data Sheet No.	
Tentative Product	*******	********	-	
	to changes for improvement without y data, drawings, company confidential	12/29/2017	Version 1.3	Page 9/14




Packaging Tape Dimension

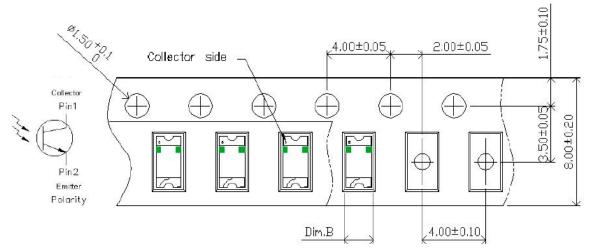



Dim. A	Dim. B	Dim. C	Q'ty/Reel
3.50±0.05	1.88±0.05	1.27±0.05	3K


Unit: mm

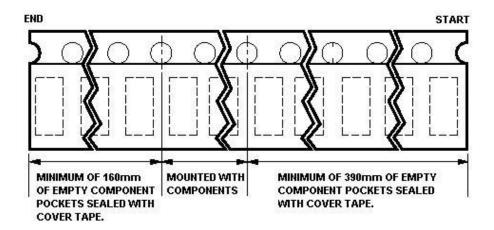


Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data Sheet No.	
Tentative Product	*******	******	-	
1 -	t to changes for improvement without ry data, drawings, company confidential	12/29/2017	Version 1.3	Page 10/14



Reel Dimension

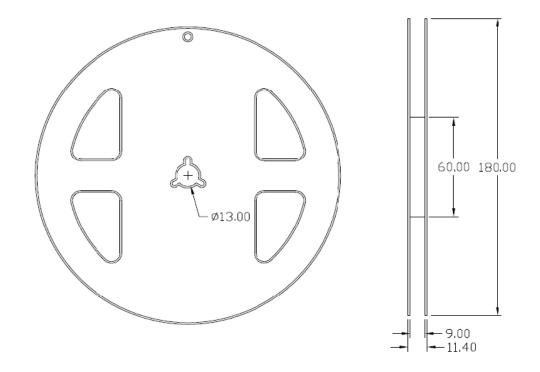

Packing

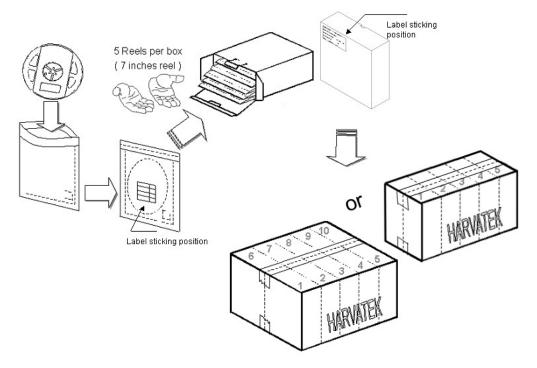

5 or 10 boxes per carton is available depending on shipment quantity.

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data Sheet No.	
Tentative Product	*******	*******	-	
	t to changes for improvement without y data, drawings, company confidential	12/29/2017	Version 1.3	Page 11/14




Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

A humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

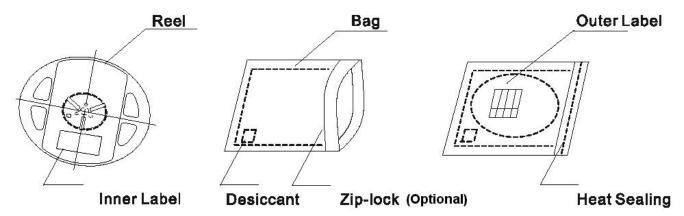

Baking

Baking before soldering is recommended when the package has been unsealed for 4 weeks. The conditions are as followings:

- 1. $60\pm3^{\circ}$ C ×(12~24hrs)and<5%RH, taped reel type.
- 2. $100\pm3^{\circ}$ C × (45min~1hr), bulk type.
- 3. $130\pm3^{\circ}$ C×(15min~30min), bulk type.

Precautions

- 1. Avoid exposure to moisture at all times during transportation or storage.
- 2. Anti-Static precaution must be taken when handling GaN, InGaN, and AllnGaP products.
- 3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.
- 4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
- 5. Avoid direct contact with the surface through which the LED emits light.
- 6. If possible, assemble the unit in a clean room or dust-free environment.

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data Sheet No.	
Tentative Product	*******	********	-	
	t to changes for improvement without ry data, drawings, company confidential	12/29/2017	Version 1.3	Page 12/14




Reflow Soldering

Recommend soldering paste specifications:

- 1. Operating temp.: Above 220°C ,60sec
- 2. Peak temp.:260°C Max.,10sec Max.
- 3. Reflow soldering should not be done more than two times.
- 4. Never take next process until the component is cooled down to room temperature after reflow.
- 5. The recommended reflow soldering profile (measuring on the surface of the LED terminal) is following:

Lead-free Solder Profile

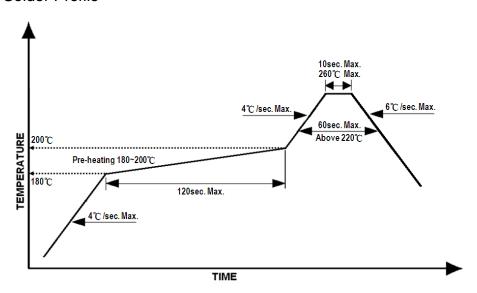

Reworking

- Rework should be completed within 5 seconds under 260°C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultra sonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100^oC max, <3min

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data Sheet No.	
Tentative Product	*******	********	-	
	t to changes for improvement without ry data, drawings, company confidential	12/29/2017	Version 1.3	Page 13/14



Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electric-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

Revise History

The vise i metery						
Rev.	Descriptions	Date	Page			
1.0	-	05/19/2017	-			
1.1	Packing Update	07/26/2017	11			
1.2	V _{CE(sat)} Test conditions & Characteristics	10/05/2017	6&8			
1.3	CHIP LEDs >> Phototransistor / Revise item name	12/29/2017	1&5			
		i				

Official Product	HT Part No. B1501PTH9B-000113	Customer Part No.	Data Sheet No.	
Tentative Product	*******	*******	-	
1 .	t to changes for improvement without ry data, drawings, company confidential	12/29/2017	Version 1.3	Page 14/14