#### 8W, DIY AC/DC converter



#### **FEATURES**

• Ultra-wide 85 - 305VAC and 100 - 430VDC input voltage range

**MORNSUN®** 

- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +85°C
- Multi-application available, flexible layout
- High power density, high reliability
- Low power consumption, green power
- Output short circuit, over-current protection
- IEC/EN/UL62368 safety approval
- Designed to meet IEC/EN/UL60335 safety standards

LS08-13BxxSS(-F) series is one of Mornsun's highly efficient green power AC-DC Converter series. They feature ultra-wide wide input range accepting either AC or DC voltage, high efficiency, low power consumption and CLASS II reinforced insulation. All models are particularly suitable for industrial control, electric power, instrumentation and smart home applications which don't have high requirement for dimension. A variety of EMC external circuits meet the needs of multiple industries.

Selection G	Juide				
Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (µF) Max.
	LS08-13B03SS(-F)*	5.28W	3.3V/1600mA	70	1500
	LS08-13B05SS(-F)		5V/1600mA	74	1500
	LS08-13B09SS(-F)		9V/880mA	75	1000
CE/UL/CB	LSO8-13B12SS(-F)	8W	12V/670mA	76	680
-	LS08-13B15SS(-F)		15V/530mV	77	470
	LS08-13B24SS(-F)	1	24V/330mA	79	330

Note: ① \*An "-F" suffix designates horizontal package vs. standard vertical mounting. ② If the product is used in a severe vibration application, it needs to be glued and fixed.

Input Specifications						
ltem	Operating Conditions	Min.	Тур.	Max.	Unit	
Input Voltago Dango	AC input	85		305	VAC	
Input Voltage Range	DC input			430	VDC	
Input Frequency		47		63	Hz	
	115VAC			0.3		
Input Current	277VAC			0.15	Α	
	115VAC		15			
Inrush Current	277VAC		30			
Recommended External Input Fuse		1A, slow-blow, required				
Hot Plug		Unavailable				

<b>Output Specifications</b>						
Item	Operating Condition	าร	Min.	Тур.	Max.	Unit
Output Voltage Accuracy	0% 100% la sul	3.3V output		±1.5	±3	%
	0% - 100% load	Other output		±l	±2	
Line Regulation	Rated load	Rated load		±0.5	±l	/0
Load Regulation	0% - 100% load	0% - 100% load		±l	±1.5	
Ripple & Noise*	20MHz bandwidth (p	20MHz bandwidth (peak-to-peak value)		80	150	mV
Temperature Coefficient				±0.02		%/°C
Short Circuit Protection			Hicc	up, continu	ous, self-reco	very
Over-current Protection				$\geq$ 110%lo, self-recovery		
	3VDC/5VDC Output	3VDC/5VDC Output		$\leqslant$ 9VDC (Output voltage clamp or hiccup )		
Over-voltage Protection	9VDC Output	9VDC Output		$\leqslant$ 15VDC (Output voltage clamp or hiccup )		

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

#### 2019.11.01-A/2 Page 1 of 7

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

### AC/DC Converter

#### LSO8-13BxxSS(-F) Series

## **MORNSUN**<sup>®</sup>

	12VDC/15VDC Output		$\leqslant$ 25VDC (Output voltage clamp or hiccup )				
	24VDC Output	≤35VDC	(Output volt	age clamp o	or hiccup )		
Minimum Load		0			%		


Note: \* The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.


General Spec	ifications						
ltem		Operating Conditions	Min.	Тур.	Max.	Unit	
Isolation Test	Input-output	Electric Strength Test for 1min., leakage current<5mA	3000			VAC	
Operating Temperat	lre		-40		+85	°C	
Storage Temperature	)		-40		+105	C	
Storage Humidity					95	%RH	
		-40°C to -25°C	2.67			<b>%/</b> ℃	
		+55℃ to +85℃	2.5			7 <b>6/</b> C	
Power Derating		85VAC - 100VAC	1			0/ 1/100	
		277VAC - 305VAC	0.54			%/VAC	
Safety Standard			IEC/EN/UL62	IEC/EN/UL62368, IEC/EN/UL60335			
Safety Certification			IEC/EN/UL62	IEC/EN/UL62368			
Safety CLASS			CLASS II	CLASS II			
MTBF			MIL-HDBK-21	MIL-HDBK-217F@25°C>300,000 h			

Mechanical Specifications		
Case Material	44.50 x 24.00 x 15.00mm	
Weight	11g (Typ.)	
Cooling method	Free air convection	

Electron	nagnetic Compatibil	ity (EMC)		
	CE	CISPR32/EN55032	CLASS A (Recommended circuit 1, 4)	
Emissions		CISPR32/EN55032	CLASS B (Recommended circuit 2, 3)	
LITIISSIOTIS	RE	CISPR32/EN55032	CLASS A (Recommended circuit 1, 4)	
	KL	CISPR32/EN55032	CLASS B (Recommended circuit 2, 3)	
	ESD	IEC/EN61000-4-2	Contact ±6KV	Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
		IEC/EN61000-4-4	±2KV (Recommended circuit 1, 2)	perf. Criteria B
	EFT	IEC/EN61000-4-4	±4KV (Recommended circuit 3, 4)	perf. Criteria B
		IEC/EN61000-4-5	line to line $\pm 1$ KV (Recommended circuit 1, 2)	perf. Criteria B
Immunity	Surge	IEC/EN61000-4-5 IEC/EN61000-4-5	line to line±2KV (Recommended circuit 3, 4) line to line±4KV (Recommended circuit 4)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

#### Product Characteristic Curve





Note: 1) With an AC input between 85 -100VAC/277- 305VAC and a DC input between 100 - 120VDC/390 - 430VDC, the output power must be derated as per temperature derating curves;

(2) This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.





MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.11.01-A/2 Page 2 of 7


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation



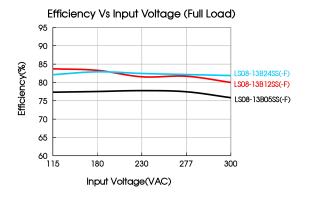

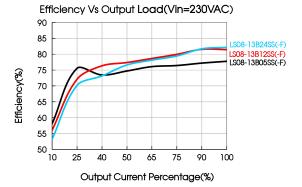

#### Additional Circuits Design Reference

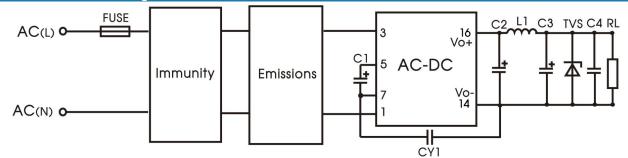

LS(-F) series additional circuits design reference

Immunity design	circuits for reference	Emissions design circuits for reference		
CLASS III	CLASS IV	CLASS A	CLASS B	

		LSO8(-F) serie	es additional compone	ents selection g	juide		
Part No.	FUSE(required)	C1required)	C2 (required)	L1 (required)	C3 (required)	C4	CY1 (required)
LS08-13B03SS(-F)			470µF/16V		150µF/35V		
LS08-13B05SS(-F)			(solid-state capacitor)		100017001		
LS08-13B09SS(-F)	1A/300V	22µF/450V	220µF/16V	4.7µH	100µF/35V	0.1µF/	1.0nF/
LS08-13B12SS(-F)	14/3000	22µF/400V	(solid-state capacitor)	(Max 60m Ω)	100µF/35V	50V	400VAC
LS08-13B15SS(-F)			470uF/35V				1
LS08-13B24SS(-F)			220uF/35V		47µF/35V		

Note:

1. C1: input capacitors, C2: output storage capacitors, they must be connected externally.

2. We recommend using an electrolytic capacitor with high frequency and low ESR rating for C3 (refer to manufacture's datasheet). Combined with C2, L1, they form a pi-type filter circuit. Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C4 is a ceramic capacitor, used for filtering high frequency noise. A suppressor diode (TVS) is a recommended to protect the application in case of a converter failure and specification should be 1.2 times of the output voltage.



MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.11.01-A/2 Page 3 of 7

### AC/DC Converter

### LSO8-13BxxSS(-F) Series


## **MORNSUN**<sup>®</sup>

#### **Environmental Application EMC Solution**

	LS(-F) serie	s environmental applicatior	n EMC solutior	n selection tab	le	
Recommended circuit	Application environmental	Typical industry	Input voltage range	Environment temperature	Emissions	Immunity
1	Basic application	None		<b>-40</b> ℃ to +85℃	CLASS A	CLASS III
2	Indoor civil environment	Smart home/Home appliances (2Y)		-25℃ to +55℃	CLASS B	CLASS III
2	Indoor general environment	Intelligent building/Intelligent agriculture			CEASE	
3	Indoor industrial environment	Manufacturing workshop	85~305VAC	<b>-25</b> ℃ to +55℃	CLASS B	CLASS IV
	Outdoor general environment	ITS/Video monitoring/Charging point/Communication/Security and protection		<b>-40</b> ℃ <b>to +85</b> ℃	CLASS A	CLASS IV
4	Outdoor harsh environment	On-line power meter Communication base station		- <b>40</b> ℃ to +85℃	CLASS A	>CLASS IV Surge: line to ground ±4KV EFT: CLASS IV

#### Electromagnetic Compatibility Solution--Recommended Circuit


#### 1. Recommended circuit 1—Basic application

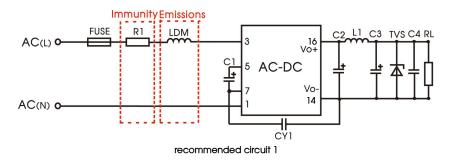

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Basic application	<b>-40</b> ℃ to +85℃	CLASS III	CLASS A

Component	Recommended value
RI	12Ω/3W
LDM	4.7mH

### 2. Recommended circuit 2——Indoor civil /Universal system recommended circuits for general environment

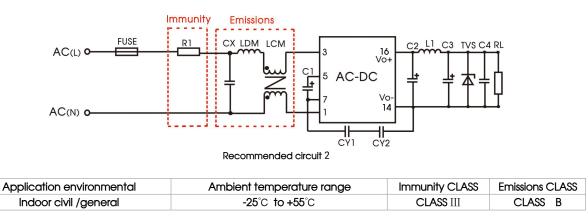




MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.11.01-A/2 Page 4 of 7



Component	Recommended value
RI	12Ω/3W
CY1(CY2)	1.0nF/400VAC
LCM	3.5mH
LDM	0.33mH
CX	0.1µF/310VAC
FUSE (required)	1A/300V, slow-blow
Note: In the home appliance application environment, the two Y cc connected (CY1/CY2, value at 2.2nF/400VAC), which can meet the needed.	

3. Recommended circuit 3—Universal system recommended circuits for indoor industrial environment

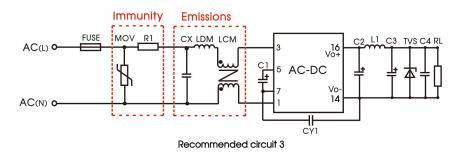

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Indoor industrial	<b>-25</b> °C to +55°C	CLASS IV	CLASS B

Component	Recommended value	
MOV	S14K350	
C1	450V/22uF	
CY1	2.2nF/400VAC	
CX	0.1µF/310VAC	
LCM	3.5mH	
LDM	0.33mH	
RI	12Ω/3W	
FUSE (required)	2A/300V, slow-blow	

4. Recommended circuit 4——Universal system recommended circuits for outdoor general/harsh environment

#### Immunity Emissions 1 FUSE MOV IDM R1 C3 TVS C4 RL C.2 16 Vo+ AC(L) 0 ₿ 5 AC-DC Ŀ Vo 14 AC(N) o CY1 Recommended circuit 4

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Outdoor general environment	<b>-40</b> °C <b>to +85</b> °C	CLASS IV	CLASS A

Component	Recommended value
MOV	S14K350
C1	450V/22uF
LDM	4.7mH
RI	12Ω/3W
FUSE (required)	2A/300V, slow-blow

**MORNSUN**<sup>®</sup>

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.







Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Outdoor harsh environment	-40°C to +85°C	>CLASS IV Surge: line to ground ±4KV EFT: CLASS IV	CLASS A
Compone	ent	Recommende	ed value
MOV		S20K35	0
C1		450V/33uF (Surge pro	tection priority)
LDM		4.7mH	
R1		33 Ω /5\	N
FUSE (requi	ired)	6.3A/300V, slo	w-blow

#### 5. For additional information please refer to application notes on <u>www.mornsun-power.com.</u>

#### LS08-13BxxSS Dimensions and Recommended Layout

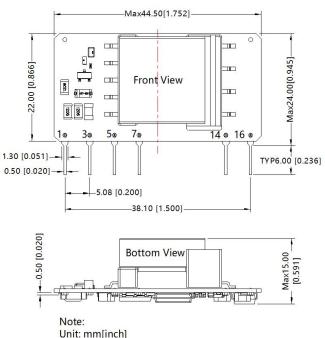

Unit: mm[inch] Pin section tolerances: ±0.10[±0.004] General tolerances: ±0.50[±0.020] The layout of the device is for reference only, please refer to the actual product THIRD ANGLE PROJECTION

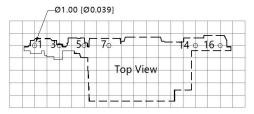

Note:Grid 2.54\*2.54mm

Pin-Out	
Pin	Function
1	AC(N)
3	AC(L)
5	+V(cap)
7	-V(cap)
14	-Vo
16	+Vo

 1.It is necessary to add C1 between pin5 and pin7.
2.It is necessary to add circuit to the output, such as the recommended circuit 1.

**MORNSUN**<sup>®</sup>


MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.11.01-A/2 Page 6 of 7

#### LSO8-13BxxSS(-F) Series

# **MORNSUN**<sup>®</sup>

#### LS08-13BxxSS-F Dimensions and Recommended Layout

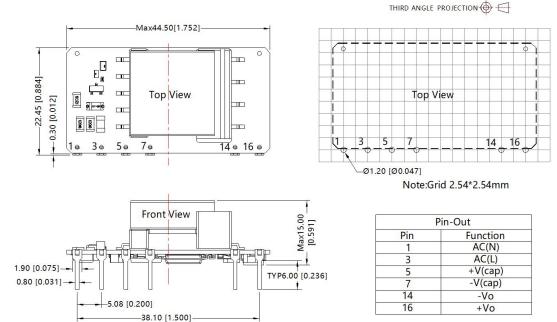

Note: Unit: mm[inch] Pin section tolerances:  $\pm 0.10[\pm 0.004]$ General tolerances:  $\pm 0.50[\pm 0.020]$ The layout of the device is for reference only, please refer to the actual product 1.It is necessary to add C1 between pin5 and pin7. 2.It is necessary to add circuit to the output, such as the recommended circuit 1.

#### Note:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. Packaging bag number: 58220032(LS08-13BxxSS); 58220025(LS08-13BxxSS-F);
- 2. External electrolytic capacitors are required to modules, more details refer to typical applications;
- 3. This part is open frame, at least 6.4mm safety distance between the primary and secondary external components of the module is needed to meet the safety requirement;
- 4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%, nominal input voltage (115V and 230V) and rated output load;
- 5. In order to improve the efficiency at light load, there will be audible noise generated, but it does not affect product performance and reliability;
- 6. All index testing methods in this datasheet are based on our company corporate standards;
- 7. We can provide product customization service, please contact our technicians directly for specific information;
- 8. Products are related to laws and regulations: see "Features" and "EMC";
- 9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

### Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com

**MORNSUN**<sup>®</sup>

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.11.01-A/2 Page 7 of 7

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation