# **ULTRA LOW CAPACITANCE STEERING DIODE/TVS ARRAY**



## **DESCRIPTION**

The PLR3343 is an ultra low capacitance, 4-channel steering diode/TVS array. This device is designed to protect computing applications such as Gigabit Ethernet, HDMI (2.0 & 4K), USB(1.0-3.1) and DVI interfaces as well as telecommunication equipment and systems. The PLR3343 is available in the space-saving DFN-10 package configuration.

This device meets the IEC 61000-4-2 (ESD), 61000-4-2 (EFT) and 61000-4-4 (Surge) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This device in conjunction with passive components integrated into a TVS/filter network can be used for EMI/RFI protection.

#### **FEATURES**

- Compatible with IEC 61000-4-2 (ESD): Contact ±8kV, Air ±15kV
- Compatible with IEC 61000-4-4 (EFT)
- Compatible with IEC 61000-4-5 (Lightning)
- Protects 4 Lines
- Ultra Low Capacitance: 0.5pF Max(I/O-GND) & 0.25pF Max(I/O-I/O)
- Low Clamping Voltage
- 3.3V Low Operating Voltage
- Optimized Package for High Speed Data Line PCB Layout
- RoHS Compliant
- REACH Compliant

- HDMI, HDMI 2.0, HDMI 4K
- Display Ports
- Gigabit Ethernet

**APPLICATIONS** 

- USB(1.0 3.1)
- VGA
- Set-top Box
- Flat Panel Monitors/Smart TV
- Laptops & Desktops
- UHD
- DVI Ports


## MECHANICAL CHARACTERISTICS

- Molded DFN-10 Package
- Approximate Weight: 7 milligrams
- Lead-Free
- Solder Reflow Temperature:

Pure-Tin - Sn, 100: 260-270°C

- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

# **PIN CONFIGURATION**

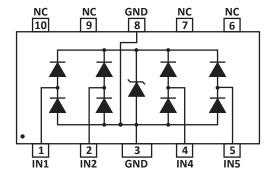


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified							
PARAMETER	SYMBOL	VALUE	UNITS				
Peak Pulse Current	I <sub>PP</sub>	5	Amps				
Operating Temperature	T <sub>L</sub>	-55 to 125	°C				
Storage Temperature	T <sub>STG</sub>	-55 to 150	°C				
Peak Pulse Power (tp = 8/20μs) - See Figure 1	P <sub>pp</sub>	150	Watts				
ESD Pulse - Contact		±15	kV				
ESD Pulse - Air		±25	kV				

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified								
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE (Note 1)	MINIMUM BREAKDOWN VOLTAGE (Note 1) @ 1mA V <sub>(BR)</sub>	MAXIMUM CLAMPING VOLTAGE (Note 1) (Fig. 2) @ I <sub>p</sub> = 1A V <sub>c</sub>	MAXIMUM LEAKAGE CURRENT (Note 1)	TYPICAL CAPACITANCE I/O - I/O  @0V, 1MHz C <sub>j</sub>	TYPICAL CAPACITANCE I/O - GND  @0V, 1MHz C <sub>j</sub>	
		VOLTS	VOLTS	VOLTS	μΑ	pF	pF	
PLR3343	P43	3.3	5.6	10	1.0	0.25	0.5	
NOTES								

## NOTES

<sup>1.</sup> I/O to ground.

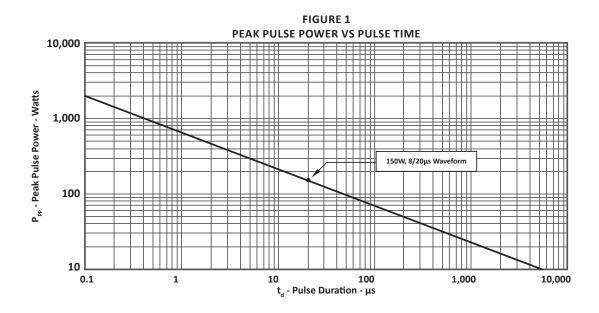

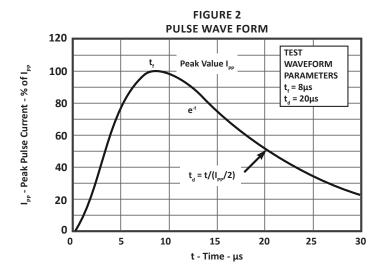


FIGURE 3



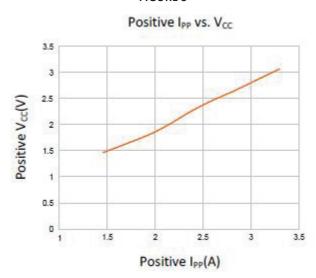



FIGURE 4
Typical curve C<sub>IN</sub> vs.V<sub>IN</sub>



## FIGURE 5

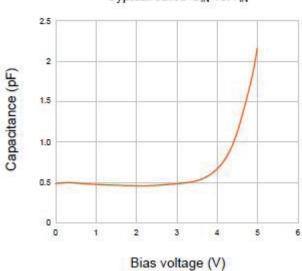

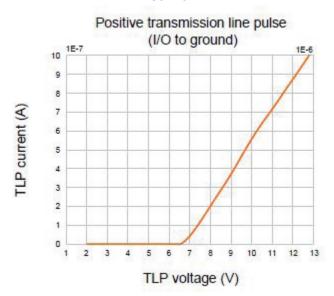

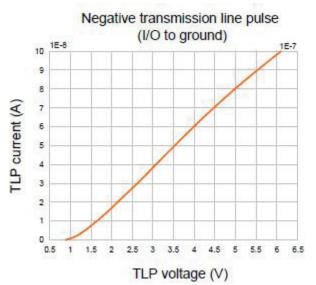




## **PACKAGE INFORMATION**


OUTLINE DIMENSIONS							
DIM	MILLIN	IETERS	INCHES				
	MIN	MAX	MIN	MAX			
Α	0.47	0.60	0.019	0.024			
A1	0.00	0.05	0.000	0.002			
A2	0.13	0.21	0.005	0.008			
b	0.15	0.25	0.006	0.010			
b1	0.35	0.45	0.014	0.018			
D	2.40	2.60	0.094	0.102			
E	0.90	1.10	0.035	0.043			
е	0.50 N	ominal	0.020 N	Iominal			
L	0.35	0.35 0.43		0.017			

## NOTES


1. Controlling dimension: millimeters.

 ${\bf 1.} \ \ {\bf Controlling\ dimension:\ millimeters.}$ 

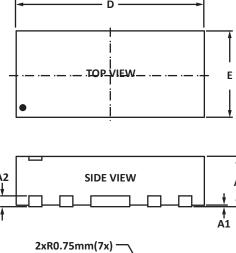




PAD LAYOUT							
DIM	MILLIMETERS	INCHES					
	NOMINAL	NOMINAL					
С	0.875	0.34					
G	0.20	0.008					
Р	0.50	0.020					
P1	1.00	0.039					
Х	0.25	0.010					
X1	0.46	0.018					
Υ	0.675	0.027					
Y1	1.55	0.061					
NOTES	}						

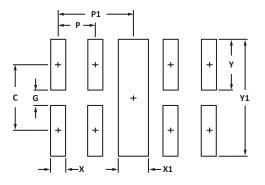

# **TAPE AND REEL**

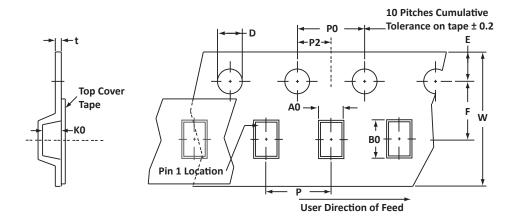

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	ко	D	E	F	W	P0	P2	Р	tmax
178mm (7")	8mm	1.20 ± 0.10	2.70 ± 0.10	0.75 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

## NOTES

- ${\bf 1.}\ \ {\bf Dimensions\ are\ in\ millimeters.}$
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T7 = 7" Reel 3,000 pieces per 8mm tape.
- 4. Marking on Part marking code (see page 2).

ORDERING INFORMATION							
BASE PART NUMBER	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY		
PLR3343 n/a		-T7	3,000	7"	n/a		
This device is only available in a Lead-Free configuration.							

05491.R3 5/18 Page 7 <u>www.protekdevices.com</u>



## COMPANY INFORMATION

#### **COMPANY PROFILE**

In business more than 20 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products.

## **CONTACT US**

## **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

## By Telephone

General: 602-431-8101

Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114

Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

## By E-mail:

Asia Sales: <u>asiasales@protekdevices.com</u>
Europe Sales: <u>europesales@protekdevices.com</u>
U.S. Sales: <u>ussales@protekdevices.com</u>
Distributor Sales: <u>distysales@protekdevices.com</u>

Distributor Sales: <a href="mailto:distysales@protekdevices.com">distysales@protekdevices.com</a>
Customer Service: <a href="mailto:service@protekdevices.com">service@protekdevices.com</a>
Technical Support: <a href="mailto:support@protekdevices.com">support@protekdevices.com</a>

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19

Zervex

Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

#### Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2016 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.