
### 

# PNH1275 & PNH1275B

### **HIGH ENERGY - EXTENDED PULSE TVS**

# **RTCA DO-160G COMPLIANT PRODUCT**



## DESCRIPTION

The PNH1275 and PNH1275B are high power transient voltage suppressors (TVS) designed to provide protection against long duration switching transient threats. These heavy duty devices are suited for DC applications that include heavy duty motors, generators, or where DC power is being switched on and off at frequent intervals.

# FEATURES


- RTCA DO-160G COMPLIANT PRODUCT
- MIL-STD-1275E SEC 5.3.3.2 COMPLIANT PRODUCT
- Compatible with IEC 61000-4-5 (Surge): 20kA, 8/20µs Level 3(Line-Gnd) & Level 4(Line-Line)
- 45,000 Watts Peak Pulse Power per Line (tp = 1ms)
- High Average (DC) Power Dissipation
- Unidirectional and Bidirectional Configurations
- Superior Heat Dissipation Capability
- Each Device 100% Tested
- CE Compliant

### **MECHANICAL CHARACTERISTICS**

• Approximate Weight: 65 grams



- Remote DC Power Supply, Base Station & Microwave Protection
- MIL-STD-1275 Power Bus Protection
- Electric Drive Motors & Controls
- Mobile Electronics Operating in Harsh Environments





MAXIMUM RATINGS @ 25°C Unless Otherwise Specified								
PARAMETER	SYMBOL	VALUE	UNITS					
Peak Pulse Power (tp = 1ms) - See Figure 1	P <sub>PP</sub>	45	kilowatts					
Operating Temperature	TL	-55 to 150	°C					
Storage Temperature	T <sub>stg</sub>	-55 to 150	°C					
Steady State Power Dissipation (derate 2.33W/°C)	T <sub>A</sub>	350	Watts					

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified								
PART NUMBER (Note 1)	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE		MAXIMUM CLAMPING VOLTAGE (Fig. 2)	MAXIMUM LEAKAGE CURRENT	MAXIMUM PEAK PULSE CURRENT (Fig. 2)	MAXIMUM OPERATING CURRENT (Fig. 3)	
	V <sub>WM</sub> VOLTS	V <sub>(BR)</sub> VOLTS	@I <sub>,</sub> mA	@ 865A 10/1000μs V <sub>c</sub> VOLTS	@V <sub>wm</sub> Ι <sub>D</sub> μΑ	I <sub>PPM</sub> AMPS	I <sub>PPM</sub> AMPS	
PNH1275	28	32	30	52	60	865	750	
PNH1275B	28	32	30	52	60	865	750	
NOTE 1. Maximum VF = 3.5V @ 100A, 8.3ms (sine wave) - Unidirectional Only.								

**HIGH ENERGY - EXTENDED PULSE TVS** 

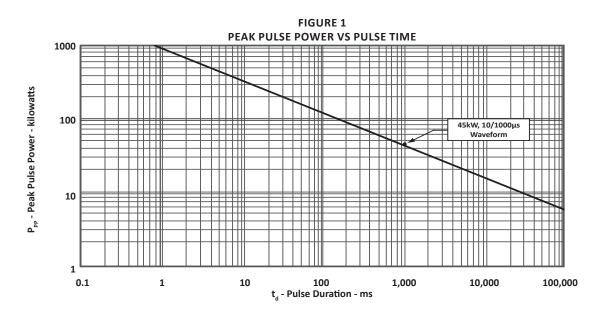
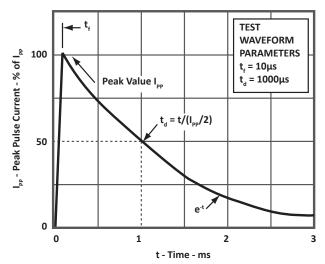


FIGURE 2 PULSE WAVEFORM




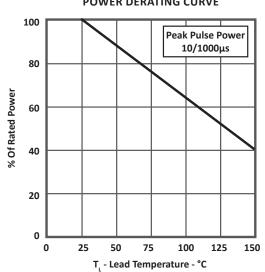


FIGURE 4

POWER DERATING CURVE

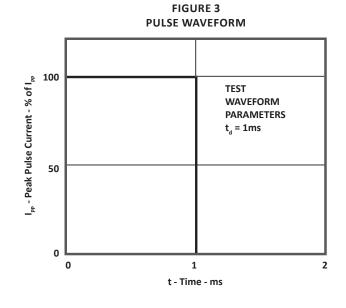


**TYPICAL DEVICE CHARACTERISTICS** 

# PNH1275 & PNH1275B

### PACKAGE INFORMATION

OUTLINE DIMENSIONS							
DIM	MILLIN	1ETERS	INCHES				
	MIN	MAX	MIN	MAX			
А	62.74	64.26	2.47	2.53			
В	53.34	54.48	2.10	2.145			
С	4.32	5.33	0.17	0.21			
D	10.54	12.07	0.415	0.475			
E	3.18	DIA	0.125 DIA				
F	8.26	9.27	0.325	0.365			
G	11.	.43	0.45				
н	21.84	23.37	0.86	0.92			
I	5.	59	0.22				
J	16.51	17.53	0.65	0.69			
К	8.	51	0.335				
NOTES 1. Dimensions "E", "G", "I" and "K" are nominal.							

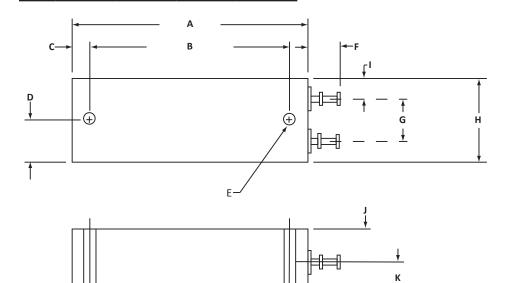



t

t

### **COMPANY INFORMATION**

### **COMPANY PROFILE**

In business more than 20 years, ProTek Devices<sup>™</sup> is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products.

#### CONTACT US

### **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

### By Telephone

General: 602-431-8101 Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114 Product Technical Support: 602-414-5107

### By Fax

General: 602-431-2288

#### By E-mail:

Asia Sales: <u>asiasales@protekdevices.com</u> Europe Sales: <u>europesales@protekdevices.com</u> U.S. Sales: <u>ussales@protekdevices.com</u> Distributor Sales: <u>distysales@protekdevices.com</u> Customer Service: <u>service@protekdevices.com</u> Technical Support: <u>support@protekdevices.com</u>

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19 Zervex Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

#### Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2018 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.