

AluLED HortiSpectrum GP HE RBW

Issue Date	June 2021
Issued by	V. Malassise

Applications

- Green Houses
- Grow Rooms
- General lawn
- Sports field maintenance
- DLI supplementation

Characteristics

- Max. Input: 1,800mA
- L70 > 50.000 hours
- 05 years warranty
- Cooling requested
- Precised customized light formula
- IP66 (with optics + heatsink)




TECHNICAL INFORMATION


PRODUCT	PART NUMBER	# LEDs	WAVELENGTH	Photon Flux*	If Nom. (mA)	TC (°C)	Power (W)	Efficacy (PPF/W)
AluLED HortiSpectrum GP HE RBW	80375800100	28	450+660nm	132 μmols/s	700	85	49.0	2.70

*Photon Flux between 400-700nm

SPECTRAL DISTRIBUTION

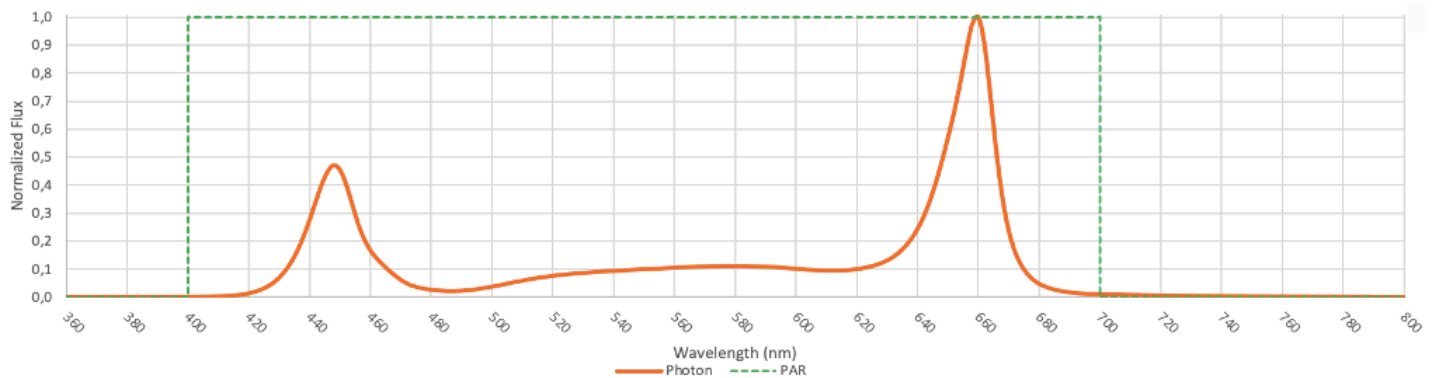


■ BLUE ■ GREEN ■ RED ■ FAR RED



Parameter	Value
Total # of LEDs	28
Electrical Power	49 W
PPF (400-700nm)	132 μmol/s
PPF Efficacy	2,7 μmol/J
PF (360-780nm)	133 μmol/s
PF Efficacy	2,72 μmol/J
UV (360-400nm)	0 μmol/s
B (400-499nm)	32 μmol/s
G (500-599nm)	27 μmol/s
R (600-700nm)	73 μmol/s
FR (700-800nm)	1 μmol/s
R:B	2,24:1
R:FR	68,78:1

MECHANICAL DRAWING

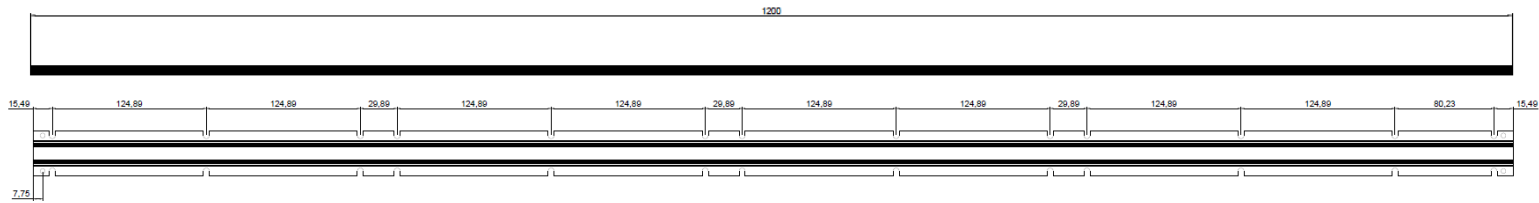

Unit: mm

APPLICATIONS

Green Houses



Grow Rooms

